



LINEAR HIGH BAY

160 WATT 4000K 120-277V



Features:

Surge Protector

Extruded Aluminum Housing


Pure Aluminum Heat Sinks provides faster dissipation

Perfect for Mounting heights between 10' to 40'

Wire Guard Available(Sold Separately)



Aluminum Reflectors (Sold Separately)

Can be surface or suspended mounted

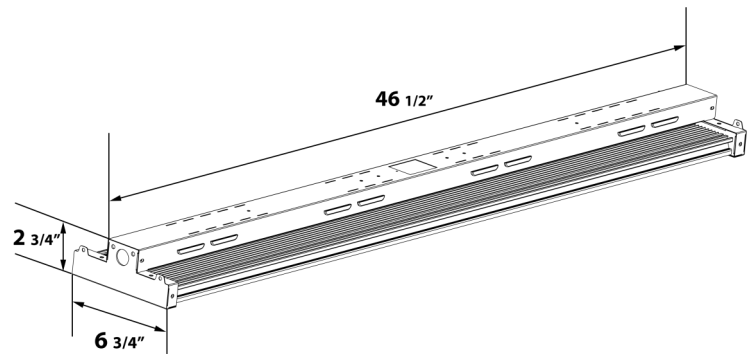

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Light Pattern	Input Current @ 120V	Lumens/ Watt	DLC#
71725	White	160	24,197	5000	100-277	117° x 119°	1.4A	151	PLBRLY44H0FY

PHOTOMETRY

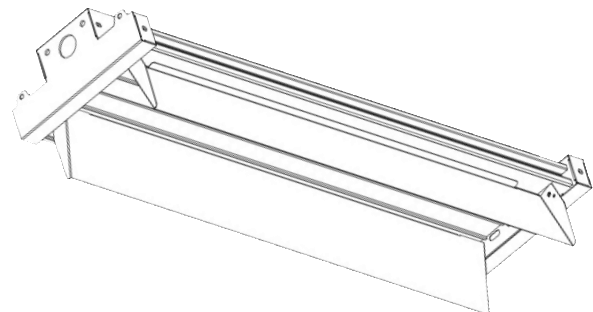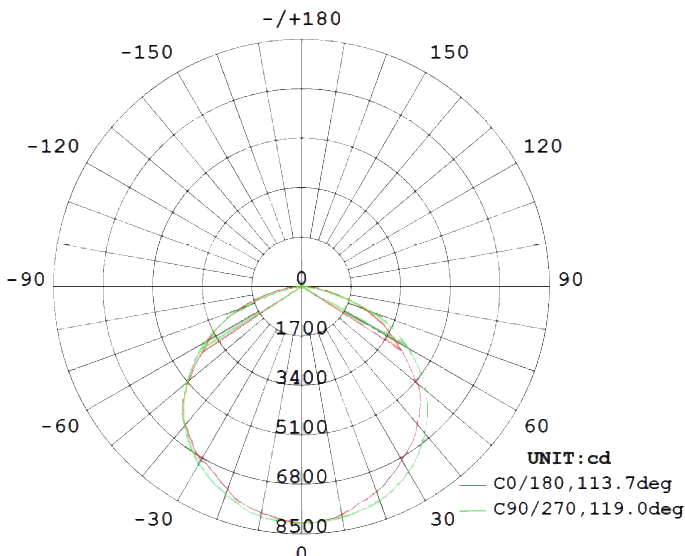

Shown with Optional Reflectors



LINEAR HIGH BAY

160 WATT 4000K 120-277V

Technical Specifications:

Electrical:

Input Voltage: 100 thru 277

Current: 1.4A @ 120V

Frequency: 60Hz

Power Factor: $\geq .9$

THD: 6.36% @ 120V

Product Parameters:

160 Watts

Efficacy: 151 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

Chromaticity Measurements:

Beam Angle: 117° x 119°

BUG Rating: B4 U5 G2

CRI: >82

R9: 8

DUV: .0012

Chromaticity (x,y): $x=.3272$; $y=.3388$

Chromaticity (u,v): $u=.2042$; $v=.4756$

Component Specifications:

LED: SMD 2835

Driver: 100-277V 50-60HZ

Driver Output Volts: 30-36

Driver Output Amps: 2100mA

Surge Protection Volts: 4000

Dimming: Dual Universal 0-10V

Operating Temperature:

Minimum Starting -22°F - 113°F

Construction:

Housing: Aluminum Housing

White Powder Coat Finish

IP Rating: IP20 Damp Location

Lens Material: No Lens

Mounting: Surface or Suspended Mount

Listings: UL Listed: E474299

DLC#: PLBRLY44H0FY

Carton Qty: 1

Weight: 11 lb

Accessories (Sold Separately):

Reflectors(2pcs): Part# 71726A

Wire Guard: Part# 71731A

Surface Mounting Kit: Part# 71727A

Emergency Battery Backup: Part# 71728

Motion Sensor Module: Part# 71729A

Motion Sensor Controller: Part# 71736A

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).