

Version	2.1	Date	12/20/24
Prepared By	JC		

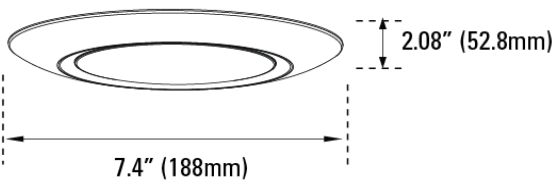
PRODUCT SPECIFICATION			
Category	Flush Mount		
Item Number	9523		
Stock Code	LED7FMC-96L9CCT5		
Mounting	7" Ceiling Mount		
Housing Color	White		
		PICTURE	

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	12	Replacement Wattage (W)	100
Tested Wattage (W)	12		
Input Voltage (V)	120V	Surge Protect Level	2.5KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.10 (@120V)	Dimmable	Yes
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	960	CCT (K)	5CCT (27/30/35/40/50K)
Efficacy (lm/w)	-	Beam Angle (°)	Flood
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 104°
IP Rating	Wet Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7337	BAEM25-170BC/347-C	25W Micro Inverter 120-347V with 12" Conduit

PRODUCT DIMENSIONS			
Width- in / (mm)	7.40"	188	
Height- in / (mm)	2.08"	52.8	
Depth- in / (mm)	-	-	
EPA (ft²)	-	-	
Weight (lbs)	0.55		
Mounting Height (ft)	8 ~ 10		
Cable Length (ft)	-		

CERTIFICATIONS			
UL/ETL	UL/cUL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS