

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:

DESCRIPTION

naturaLED® Wall Sconce comes in 20-watt, 36watt, up/down or up-and-down (3-way) selections with selectable color temperatures. Energy efficient and lasts up to 50,000+ hours average life. Our wall sconce lights are an ideal lighting solution for security lights, both residential, commercial and many other outdoor applications.



APPLICATIONS

Security, Accent, Residential, Outdoor, Wall Lighting

FEATURES

- Energy Star Qualified
- IP65 Rated
- ETL/cETL
- ColorTemp: 3CCT(3000K, 4000K, 5000K)
- Voltage: 120-347V
- Beam Angle: 20°
- CRI: >80
- Operating temperature: -40°F - 122°F
- Surge Protect Level: 4KV
- Dimmable: 0-10V
- Photocell: Included with easy ON/OFF Switch
- Light Distribution Switch: Up, Down, or Up & Down Light
- Colors: Black, White
- 5 Year Warranty



Rated Life 50,000 Hours
Warranty 5 Years



SAMPLE NUMBER FX4DWS20SW/20/8CCT3/BK/347-PH

FAMILY	DIAMETER	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR	VOLTAGE	PHOTOCELL
FX	4	DWS	20	8CCT3	BK	347	PH
Fixture	4 inch Diameter	Wall Sconce	20 Watt	CRI 80 3000K / 4000K 5000K	Black (WH) White	120-347V	Photocell Included



WALL SCONCE CCT3


WALL & AREA LUMINAIRES

ORDERING


Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Color	Size	IP65 Rated	Energy Star
10/20	7644	FX4DWS20SW/20/8CCT3/BK/347-PH	3CCT (30/40/50K)	2,300	Black	4"	•	•
10/20	7531	FX4DWS20SW/20/8CCT3/WH/347-PH	3CCT (30/40/50K)	2,300	White	4"	•	•
18/36	7645	FX6DWS36SW/20/8CCT3/BK/347-PH	3CCT (30/40/50K)	4,680	Black	6"	•	•
18/36	7532	FX6DWS36SW/20/8CCT3/WH/347-PH	3CCT (30/40/50K)	4,680	White	6"	•	•

DIMENSIONS

10/20W
2.87-lbs

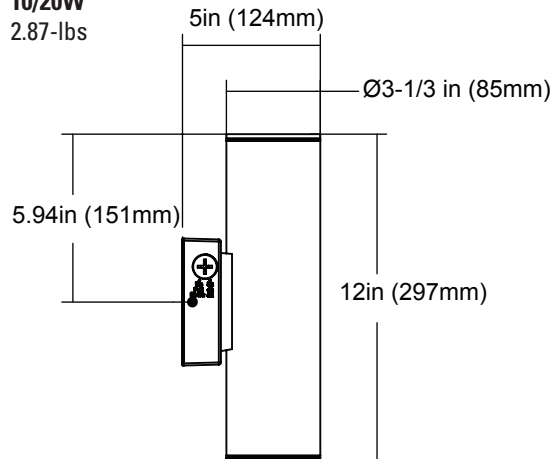


18/36W
5.29-lbs

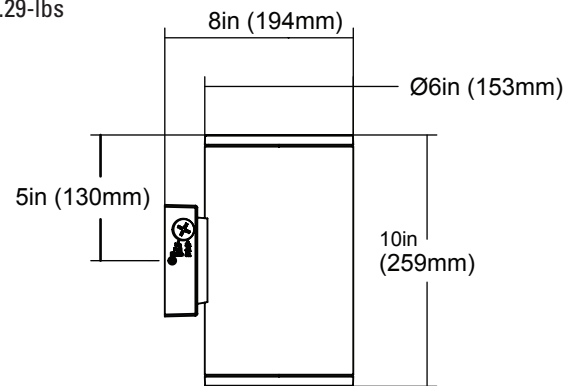


PHOTOMETRICS CHART

4-inch (20W)
Up or Down




Beam Width	Center Beam fc	Beam Width
2.5 ft	800 fc	1.1 ft
5.0 ft	202 fc	2.2 ft
7.5 ft	89.7 fc	3.3 ft
10.0 ft	50.5 fc	4.4 ft
12.5 ft	32.3 fc	5.6 ft
15.0 ft	22.4 fc	6.7 ft

4-inch (20W)
Up & Down




Beam Width	Center Beam fc	Beam Width
2.5 ft	915 fc	0.9 ft
5.0 ft	229 fc	1.8 ft
7.5 ft	102 fc	2.7 ft
10.0 ft	57.2 fc	3.6 ft
12.5 ft	36.6 fc	4.5 ft
15.0 ft	25.4 fc	5.5 ft

6-inch (36W)
Up or Down



Beam Width	Center Beam fc	Beam Width
2.5 ft	2,246 fc	0.8 ft
5.0 ft	562 fc	1.7 ft
7.5 ft	250 fc	2.5 ft
10.0 ft	140 fc	3.3 ft
12.5 ft	89.6 fc	4.2 ft
15.0 ft	62.4 fc	5.0 ft


6-inch (36W)
Up & Down



Beam Width	Center Beam fc	Beam Width
2.5 ft	2,166 fc	0.8 ft
5.0 ft	541 fc	1.7 ft
7.5 ft	241 fc	2.5 ft
10.0 ft	135 fc	3.3 ft
12.5 ft	86.6 fc	4.1 ft
15.0 ft	60.2 fc	5.0 ft

PACKAGE

Case Qty: 5 pcs (20W)



4 pcs (36W)

