


DESCRIPTION

naturaLED® Compact Flush Mounts (FMC) are an excellent replacement solution for traditional incandescent and fluorescent ceiling and wall mounted fixtures. Our FMC series is easy to install, dimmable, and damp location rated. Available FMC with multiple color temperature which can easily select: 3000K, 4000K, or 5000K. Perfect for residential, commercial and hospitality applications. Ideal for bathrooms, closets, small rooms, storage areas, hallways and stairways.




FEATURES

- Energy Star Qualified
- Wet location
- ETL
- Selectable Color Temperature (3000K, 4000K, 5000K)
- Dimmable
- Recommended ceiling height: 9-10ft
- Lightweight and easy installation
- Flood Beam Angle
- CRI: 90
- Input Voltage: 120V
- Operating temperature: -4°F - 113°F

ACCESSORIES

- KIT for recessed can installation



APPLICATIONS

- Bathroom Lighting
- Decoration Lighting
- Hallway Lighting
- Bedroom Lighting
- Ceiling Mount Lighting

WARRANTY

- 5 Year Warranty

CCT SELECT



Ordering Information

EXAMPLE: LED7FMC-90L930

LED	7	FMC	90L	9	30
LED	Diameter	Series	Lumens	CRI	Color Temp
	7 7 -inch	FMC	90L 900+	9 CRI 90	30 3000K
		Flush Mount Compact			


ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Beam Angle	Rated Hrs	Wet Location	Energy Star
15	9366	LED7FMC-90L930	3000K	900	100	Flood	50,000	•	•
15	9367	LED7FMC-90L9CCT3	3000K/4000K/5000K	714/935/794	100	Flood	50,000	•	•

SPECIFICATIONS

7-inch




Wattage	Description	Height(H)	Width (W)	Weight
15W	7FMC	1.1" (28mm)	7.4" (188mm)	0.34 lbs
15W	7FMC-CCT3	1.1" (28mm)	7.4" (188mm)	0.34 lbs

MOUNTING / ACCESSORIES

Optional


Recessed Can Installation Kit

- P10261 MTK-FMC-E26-SPRING




PACKAGE

Master Pack: 20 pcs

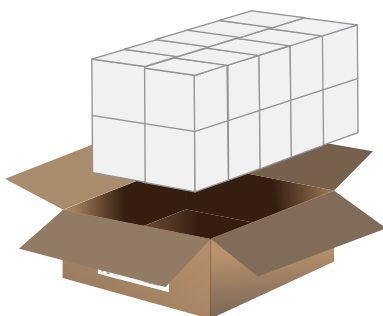


PHOTOMETRICS CHART

FMC (3000K) Energy Star



FMC (3/4/5000K) Energy Star



	Center Beam f.c.	Beam Width
2.5R	53.0 f.c.	6.9 ft.
5.0R	13.2 f.c.	13.8 ft.
7.5R	5.89 f.c.	20.6 ft.
10.0R	3.31 f.c.	27.5 ft.
12.5R	2.12 f.c.	34.4 ft.
15.0R	1.47 f.c.	41.3 ft.

	Center Beam f.c.	Beam Width
2.5R	53.0 f.c.	6.9 ft.
5.0R	13.2 f.c.	13.8 ft.
7.5R	5.89 f.c.	20.6 ft.
10.0R	3.31 f.c.	27.5 ft.
12.5R	2.12 f.c.	34.4 ft.
15.0R	1.47 f.c.	41.3 ft.