


DESCRIPTION

naturaLED® Retrofit Strip Light is an energy-saving, cost-effective, and easy to install replacement. This fixture mounts onto virtually any existing fluorescent channel; replacing existing 4' / 8' fluorescent strips and industrial fixtures to LED.

This universal design can fit up to 5.25" of T8 or T12 wide strips. Designed with round frosted acrylic lens and steel housing, improves an architectural look for retrofit replacement. Our RSL is a permanent solution that is suitable for applications including retail, warehouse, storage, and much more.

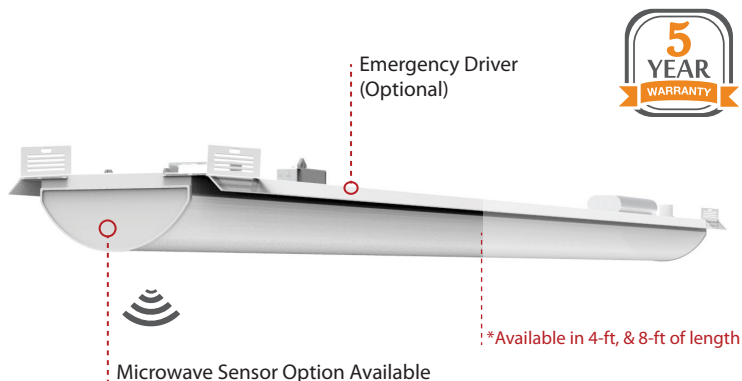

FEATURES

- DLC Premium
- For Damp Location
- UL Listed
- Easy installation
- Contour, acrylic lens option provides glare diffusion
- Available in 4' or 8' length
- Input line voltage: 120-277V
- Input Current: 0.22A
- Power Factor: >0.9
- Dimmable: 1-10V
- Surge Protection Level: 4KV
- THD: <20
- CRI: 80
- Beam Angle: 110°
- Operating temperature: -22°F - 122°F
- 50,000 rated life hours

ACCESSORIES


Emergency Driver



Motion/Daylight Sensor



347-480V to 277 Step down Driver



APPLICATIONS

- Warehouse Lighting
- Retail Lighting
- Parking Garage
- Stairwells and Hallways
- Storage Lighting

WARRANTY

- 5 Year Warranty

Ordering Information

EXAMPLE: LED-FXRSL25/48FR/840/MV


LED	FX	RSL	25	48FR	840	MV
LED	Category	Series	Wattage	Size/ Lens	CRI/ Color Temp	Voltage
	FX Fixture	RSL Retrofit Strip Light	25 25W	48 48inch FR Frosted	8 CRI 80 40 4000K	MV 120-277V Multiple Voltage

ORDERING


*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Size	Rated Hrs	Damp Location	DLC (S/P)
25	9346	LED-FXRSL25/48FR/840/MV	4000K	3,932	2x32W T8	5.5" x 48"	50,000	•	P
25	9347	LED-FXRSL25/48FR/850/MV	5000K	3,967	2x32W T8	5.5" x 48"	50,000	•	P
55	9348	LED-FXRSL56/96FR/840/MV	4000K	8,404	5x32W T8	5.5" x 96"	50,000	•	P
55	9349	LED-FXRSL56/96FR/850/MV	5000K	8,466	5x32W T8	5.5" x 96"	50,000	•	P

SPECIFICATIONS

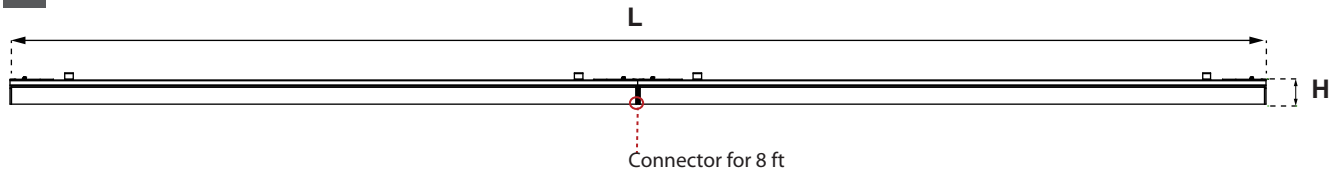

Size	Length (L)	Width (W)	Height(H)	Weight (lbs)
4 ft	48" (1219mm)	6.2" (158mm)	1.9" (48mm)	5.73
8 ft	96" (2438mm)	6.2" (158mm)	1.9" (48mm)	11.46



MOUNTING / ACCESSORIES

SOLD SEPARATELY

Emergency Driver

- 7334 BAEM15-48BC/MV-A
(LED Emergency Backup Driver 120-277V)




Motion/Daylight Sensor

- P10234 SEN-MC605V-D
(Built-In Motion Sensor MV605V D 120-277V)




Step Down Driver

- P10182 BA-10031A-240-22
(347-480V to 277V Step Down Driver)




PHOTOMETRICS CHART

FXRSL (4')- 25 Watt DLC Premium



Center Beam f.c.	Beam Width
2.5 ft	180 ft
5.0 ft	45.0 ft
7.5 ft	20.0 ft
10.0 ft	11.2 ft
12.5 ft	7.20 ft
15.0 ft	5.00 ft
Vert. Spread: 113.3°	
Horiz. Spread: 130.8°	

FXRSL (8')- 56 Watt DLC Premium



Center Beam f.c.	Beam Width
2.5 ft	395 ft
5.0 ft	99.8 ft
7.5 ft	43.9 ft
10.0 ft	24.7 ft
12.5 ft	15.8 ft
15.0 ft	11.0 ft
Vert. Spread: 125.6°	
Horiz. Spread: 111.6°	

PACKAGE

Master Pack: 1 pc

