

Project

Schedule

Date

Notes

DESCRIPTION

Our naturalLED® Slim canopy is UL listed with a rating of IP65. Aesthetically pleasing construction, low-profile design with die-cast aluminum housing, shatter-resistant polycarbonate prismatic lens. Dustproof, sealed structure, multiple ½" conduit entrances on side. The Canopy supports pendant mounting and direct surface ceiling mounting. Ideal applications for parking garage, walkway and entrance lighting etc.



FEATURES

- IP65 Rated
- Designed for operation in commercial warehouses
- Built-in microwave motion sensor (see selected models)
- Default : Light dims at 30% when no motion is detected
- 15-30 foot height performance
- CRI: 70
- Input Voltage: 120-277V
- Beam Angle: 140°
- Dimmable: 1-10V
- Material: Aluminum & glass
- Operating temperature: -22°F - 122°F
- 50,000 Hours rated average life

APPLICATIONS

- Area Lighting
- Security Lighting
- Pathway Lighting
- Perimeter Lighting
- Entryway Lighting
- Parking Garage

WARRANTY

- 5 Year Warranty


Ordering Information		EXAMPLE: LED-FXSCM70/50K/BK-SEN				
LED	FX	SCM	70	50K	BK	SEN
LED	Category FX Fixture	Style SCM Slim Canopy	Wattage 70 70-Watts	Color Temp 50K 5000K	Color BK Black	Accessory _blank none SEN Motion Sensor

ORDERING

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Color	Equiv. Wattage (W)	Motion Sensor	IP65 Rated
70	7438	LED-FXSCM70/50K/BK	5000K	5,900	Black	250W	-	•
70	7564	LED-FXSCM70/50K/BK-SEN	5000K	5,900	Black	250W	Yes	•
70	7439	LED-FXSCM70/50K/WH	4000K	5,900	White	250W	-	•
45	7561	LED-FXSCM45/50K/WH-SEN	5000K	4,150	White	175W	Yes	•
70	7565	LED-FXSCM70/50K/WH-SEN	4000K	5,900	White	250W	Yes	•
85	9218	LED-FXSCM85/50K/WH*	5000K	10,270	White	400W	-	•

*DLC Listed


SPECIFICATIONS

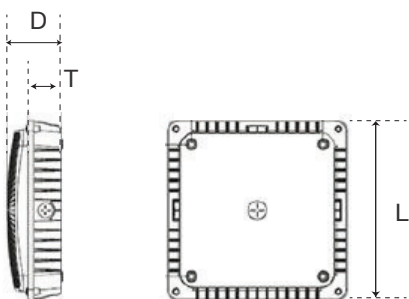

Wattage	Length (L)	Depth(D)	Housing Depth (T)	Weight
45W/70W	9.60" (244mm)	2.8" (71mm)	1.77"(45mm)	4.5-lbs


PHOTOMETRICS CHART

SCM45 (45W)



Center Beam fc	Beam Width
3.0R	24.7 ft
6.0R	6.2 ft
9.0R	2.7 ft
12.0R	1.5 ft
15.0R	1.0 ft

SCM70 (70W)



Center Beam fc	Beam Width
3.0R	33.9 ft
6.0R	8.5 ft
9.0R	3.8 ft
12.0R	2.1 ft
15.0R	1.4 ft

PACKAGE

Master Pack: 1 pc

