

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:

DESCRIPTION

naturaLED® TWP traditional wallpack comes in rugged cast-aluminum housing with excellent thermal design. DLC qualified, our TWP product offers a popular classic appearance for your needs. The traditional shape maintains an aesthetic appearance and will replace any building's wallpack or perimeter lighting. Ideal for outdoor applications such as carports, loading areas, driveways, parking area and pathways. Designed for wall mounting above four feet from ground. New available in Wattage Selectable and Color Temperature Selectable option. *Requires an easy installation using the connectors to activate photocell sensor.

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

○ Photocell Sensor Built In*



Rated Life Hours 50,000
Warranty 5 Years

FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- Built In Photocell Sensor Included (Easy connector to activate the photocell)
- ColorTemp: 4000K, 5000K or CCT3
- Dimmable: 0-10V /1-10V (28W)
- Input line voltage: 120-277V
- Input Current: 28W-0.24A, 38W-0.32A, 60W-0.50A, 80W-0.67A, 100W-0.50A
- Surge Protect Level: 4KV
- Emergency driver and microwave sensor compatible as optional accessories
- Wireguard and replacement lens
- Material: Die Cast Aluminum
- Lens: Borosilicate Glass Lens
- Corrosion resistant powder coating
- Operating temperature: -22°F - 122°F
- 5 Year Warranty
- Finish: Bronze

ACCESSORIES



Motion Sensor



Emergency Drivers



Wireguard



Replacement Lens

SAMPLE NUMBER FXTWP60SW/CCT3/BZ-PHO

FAMILY	SERIES	WATTAGE	SELECTABLE	COLOR TEMP	FINISH COLOR	ACCESSORY
FX	TWP	60	SW	CCT3	BZ	PHO
Fixture	Traditional Wallpack	28/38/60W	Selectable Wattage	3000K 4000K 5000K	Bronze	Photocell Included



TRADITIONAL WALL PACK & CCT 3

WALL & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Dim (V)	IP65 Rated	DLC (S/P)
28	9453	FXTWP28/40K/BZ-PHO	4000K	4,128	175	1-10V	•	P
28	9454	FXTWP28/50K/BZ-PHO	5000K	4,189	175	1-10V	•	P
38	9447	FXTWP38/40K/BZ-PHO	4000K	5,700	175-250	0-10V	•	P
38	9448	FXTWP38/50K/BZ-PHO	5000K	5,700	175-250	0-10V	•	P
60	9449	FXTWP60/40K/BZ-PHO	4000K	9,000	250-400	0-10V	•	P
60	9450	FXTWP60/50K/BZ-PHO	5000K	9,000	250-400	0-10V	•	P
80	9451	FXTWP80/40K/BZ-PHO	4000K	12,000	400- 575	0-10V	•	P
80	9452	FXTWP80/50K/BZ-PHO	5000K	12,000	400-575	0-10V	•	P
28	9455	FXTWP60SW/CCT3/BZ-PHO	3/4/5000K	4,404	175-400	0-10V	•	P
38			3/4/5000K	6,260	175-400	0-10V	•	P
60			3/4/5000K	9,134	175-400	0-10V	•	P
60	9456	FXTWP100SW/CCT3/BZ-PHO	3/4/5000K	9,065	400-750	0-10V	•	P
80			3/4/5000K	11,260	400-750	0-10V	•	P
100			3/4/5000K	14,500	400-750	0-10V	•	P

ACCESSORIES (Ordered Separately)



Motion Sensor
P10234 SEN-MC605V-D
(Microwave Motion Sensor 0-10V)



Replacement Glass Lens
P10002 LENS-TWP-SMALL
(Glass Lens Gasket for 28W)



Wireguard
P10004 WG-TWP-MEDIUM
(Wireguard for medium 38W,60W,80W,100W,CCT3)



Replacement Glass Lens
P10000 LENS-TWP-MEDIUM
(Glass Lens Gasket for 38-100W, CCT3)



Emergency Driver
7334 BAEM15-48BC/MV-A
(Emergency Driver for 38W, 60W, 80W, CCT3)




Replacement PC Lens
P10003 LENS-TWP-PC-MEDIUM
(Plastic Lens Gasket for 38-100W, CCT3)



Emergency Driver
7336 BAEM4-60BC/MV-A
(Emergency Driver for 28W, 38W)

DIMENSIONS


28W
5.51-lbs

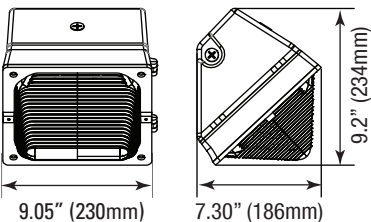

38W
6.79-lbs


60W
6.86-lbs

CCT3 60W
6.86-lbs

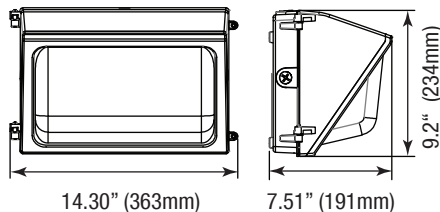


80W
8.07-lbs

CCT3 100W
9.26-lbs

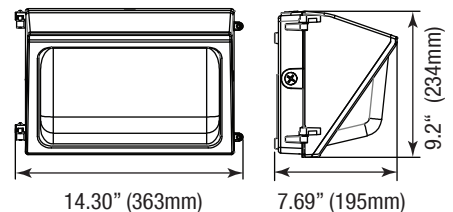

PHOTOMETRICS CHART

**28 Watt
DLC Premium**




Illuminance at a Distance

Center Beam Fc	Beam Width
136 fc	7.0 R 11.7 R
34.0 fc	15.6 R 23.4 R
15.1 fc	23.5 R 35.1 R
8.50 fc	31.3 R 46.8 R
5.44 fc	39.1 R 58.5 R
3.70 fc	46.9 R 70.3 R

■ Vert. Spread: 114.0°
■ Horiz. Spread: 133.0°

**38 Watt
DLC Premium**




Illuminance at a Distance

Center Beam Fc	Beam Width
182 fc	6.5 R 7.2 R
45.4 fc	12.9 R 14.4 R
20.2 fc	18.4 R 21.5 R
11.3 fc	25.9 R 28.7 R
7.26 fc	32.4 R 35.9 R
5.04 fc	38.0 R 43.1 R

■ Vert. Spread: 104.6°
■ Horiz. Spread: 110.3°

**60 Watt
DLC Premium**




Illuminance at a Distance

Center Beam Fc	Beam Width
284 fc	6.3 R 5.9 R
71.1 fc	12.7 R 11.8 R
31.6 fc	18.0 R 17.6 R
17.8 fc	25.3 R 23.5 R
11.4 fc	31.7 R 29.4 R
7.90 fc	38.0 R 35.3 R

■ Vert. Spread: 103.4°
■ Horiz. Spread: 99.3°

**80 Watt
DLC Premium**




Illuminance at a Distance

Center Beam Fc	Beam Width
435 fc	6.8 R 5.8 R
109 fc	13.6 R 11.6 R
48.5 fc	20.5 R 17.4 R
27.3 fc	27.3 R 23.2 R
17.5 fc	34.1 R 29.0 R
12.1 fc	40.9 R 34.0 R

■ Vert. Spread: 107.5°
■ Horiz. Spread: 98.5°

**28/38/60 Watt (CCT)
DLC Premium**




Illuminance at a Distance

Center Beam Fc	Beam Width
254 fc	6.8 R 7.0 R
63.4 fc	13.6 R 13.9 R
28.2 fc	20.4 R 20.9 R
15.8 fc	27.2 R 27.9 R
10.1 fc	34.0 R 34.8 R
7.04 fc	40.7 R 41.8 R

■ Vert. Spread: 107.3°
■ Horiz. Spread: 100.7°

**60/80/100 Watt (CCT)
DLC Premium**



Illuminance at a Distance

Center Beam Fc	Beam Width
548 fc	6.9 R 6.5 R
137 fc	13.9 R 13.0 R
60.0 fc	20.0 R 19.5 R
34.3 fc	27.8 R 26.0 R
21.9 fc	34.7 R 32.5 R
15.2 fc	41.7 R 39.0 R

■ Vert. Spread: 100.6°
■ Horiz. Spread: 104.9°

PACKAGE

Case Qty 1 pc

