

TRADITIONAL WALL PACK 38W-59W DLC 4.3

naturaLED® TWP traditional wallpack comes in rugged cast-aluminum housing with excellent thermal design. DesignLights Consortium qualified, our TWP product offers a popular classic appearance for your needs.

Delivering up to 7,179 lumens by replacing up to 400-watt metal halide luminaires, with energy savings up to 80%. The traditional shape maintains an aesthetic appearance and will replace any building's wall pack or perimeter lighting.

Our TWP is ideal for outdoor applications such as carports, loading areas, driveways, parking area and pathways. Designed for wall mounting above four feet from ground.



Features & Benefits

- ▶ DLC Standard/Premium Qualified
- ▶ L70 Rated Chip for over 100,000 projected life hours
- ▶ IP65 Rated
- ▶ Excellent thermal design
- ▶ Photocell Sensor Compatible
- ▶ Microwave Sensor Compatible
- ▶ LED Emergency Drivers Compatible
- ▶ 2KV - 6KV Surge Protection
- ▶ Corrosion resistant powder coating
- ▶ Material: Die Cast Aluminum
- ▶ Lens: Borosilicate Glass Lens

Specifications


- ▶ Input line voltage: 120-277V
- ▶ Power Factor: >0.9
- ▶ THD: <20%
- ▶ Dimmable: 0-10V
- ▶ Beam: Forward Throw
- ▶ Color Temp: 3000K, 4000K, 5000K
- ▶ Operating temperature: -22°F - 131°F
- ▶ Finish: Dark Bronze

Applications


- ▶ Security Lighting
- ▶ Pathway Lighting
- ▶ Perimeter Lighting
- ▶ Entryway Lighting
- ▶ Area Lighting

Optional Accessories (Available for purchase)

- ▶ Cut Off Shield

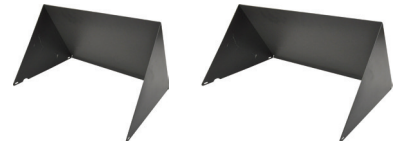

- ▶ Replacement Borosilicate Glass Lens Gasket



- ▶ Photocell



- ▶ Emergency Driver



- ▶ Microwave Sensor




Ordering Information

*P= DLC Premium / S = Standard DLC

Code	Description	CCT	Watt	Lumen	Equiv Wattage	Color	Voltage	Rated Hrs	Dimmability	IP65	DLC
7060	LED-FXTWP42/50K/DB-SEN	5000K	42	5,150	175-250W	D. Bronze	120-277	50,000	1-10V	•	S
7775	LED-FXTWP38/40K/DB	4000K	39	5,780	250-400W	D. Bronze	120-277	50,000	0-10V	•	P
7776	LED-FXTWP38/50K/DB	5000K	39	5,808	250-400W	D. Bronze	120-277	50,000	0-10V	•	P
7777	LED-FXTWP55/40K/DB	4000K	58	8,382	400-575W	D. Bronze	120-277	50,000	0-10V	•	P
7778	LED-FXTWP55/50K/DB	5000K	58	8,459	400-575W	D. Bronze	120-277	50,000	0-10V	•	P
7758	LED-FXTWP59/30K/DB	3000K	59	7,128	250-400W	Bronze	120-277	50,000	0-10V	•	-
7078	LED-FXTWP59/40K/DB	4000K	59	7,128	250-400W	Bronze	120-277	50,000	0-10V	•	S
7079	LED-FXTWP59/50K/DB	5000K	59	7,179	250-400W	Bronze	120-277	50,000	0-10V	•	S


Accessories (available for purchase)

Cut Off Shield

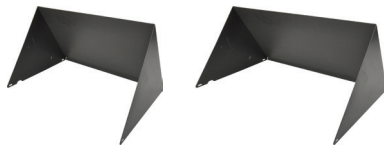

P10022	CVR-TWP-MEDIUM/DB	Full Cut-Off Shield for 38,42,55,59W
--------	-------------------	--------------------------------------

Replacement Glass Lens



P10000	LENS-TWP-MEDIUM	Lens Gasket for 38,42,55,59W
--------	-----------------	------------------------------

Photocell



P10036	SEN-PHO-BT-MT/MV	Button Photocell 120-277V
--------	------------------	---------------------------

EM Driver



7334	BAEM15-48BC/MV-A	Emergency Driver
------	------------------	------------------

Sensor




P10091	SEN-UM05/ANT5	Microwave Sensor
--------	---------------	------------------

Product Dimensions


42 / 59 Watt

Standard

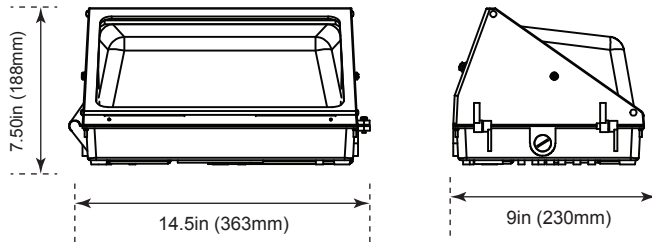

38/55 Watt

Premium

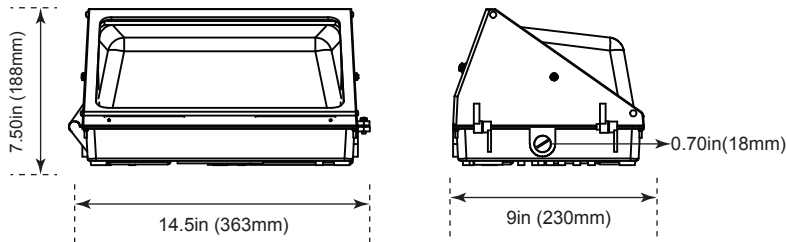

Package

