

Lights | Remote Heads | Exit Signs | EM-Drivers | Outdoor
LED Emergency Series



More Choices for **More Applications**

EXL2-10 LED Edge Lit Exit Sign

The EXL2-10 LED Edge Lit Exit Series presents a contemporary design with ease of installation and dependability in mind. Constructed of impact-resistant, optically clear acrylic, choose from clear single-faced or mirrored double-faced panels. High output LEDs deliver an indirect, evenly illuminated edge-lit exit sign with exceptional light distribution and a maintenance-free nickel-cadmium battery for long life. The EXL2-10 Series offers flexible installation for surface ceiling, wall or end mount options along with field adjustable chevrons for universal configuration based on your application's directional needs.

Construction

Specification grade aluminum extrusion design
Optically clear, impact resistant acrylic panels with lettering
Single or double faced configurations available

Electrical

Maintenance-free NiCad battery provides
90-minute emergency operation
Low voltage disconnect eliminates deep discharge
Brown-out, short circuit and voltage surge protection
LED Indicator Light & Self-Test Push Button Switch
UL Listed to Standard 924 (Emergency Lighting)
NFPA 101 (Life Safety Code) compliant
NFPA 70 (National Electrical Code) compliant

Installation

No special tools required
Mounting plate allows for surface ceiling, wall or end mount options
Field-installable, removable chevron directional indicators for all configurations
Chevron mounting template simplifies directional application
For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel
Damp Location Rated

Listings



Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions

Finish

Satin finished aluminum housing
Available with either clear (single faced) or mirrored backing (double face)
Available with either green or red lettering

Warranty

2-year limited system warranty standard
Warranty does not cover product failure due to an overvoltage event (power surge)

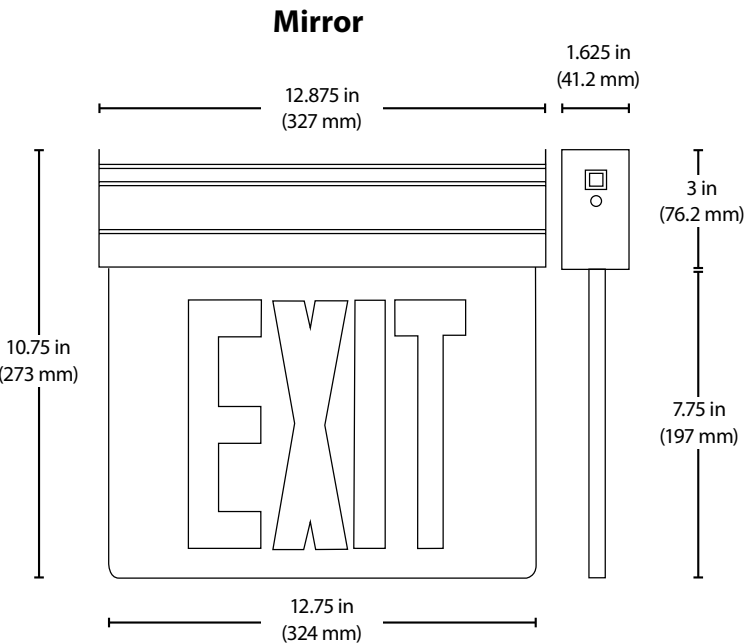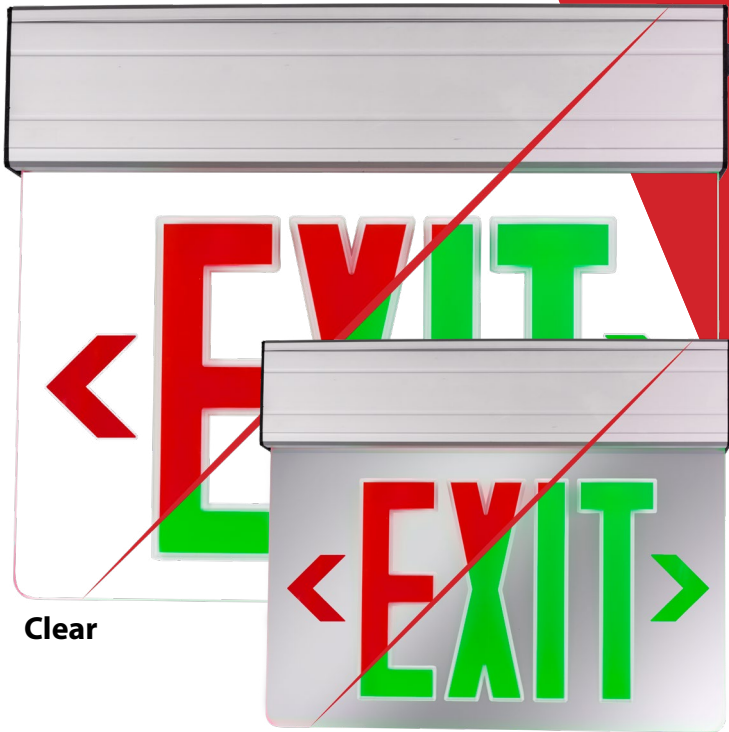

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	2.3W
Emergency Operation	Minimum 90 Minutes



Applications



The EXL series can be installed in many applications such as doorways, hallways, warehouses, etc.

Installation



The EXL2-10 does not require any special tools. Mounting the EXL2-10 into the ceiling, or wall is easy with the included mounting plate.

The EXL2-10 has an easily accessible test button outside the fixture along with LED ready light. Removable chevron directional indicators help simplify the installation.



EXL Ordering Information (EM ONLY)					
Series	Version/Voltage	Housing Color	Backing Material	Letter Color	Number of Sides
EXL2	10UNV (Version 1/120/277VAC)	AL (Aluminum)	CL (Clear-single only)	G (Green)	1 (Single)
			MR (Mirrored-double only)	R (Red)	2 (Double)

EXL Ordering Information (AC ONLY)					
Series	Version/Voltage	Housing Color	Backing Material	Letter Color	Number of Sides
EXL2	10UNVAC (Version 1/120/277V, AC ONLY)	AL (Aluminum)	CL (Clear-single only)	G (Green)	1 (Single)
			MR (Mirrored-double only)	R (Red)	2 (Double)

Warehouse Locations

Albuquerque, NM
Atlanta, GA
Detroit, MI
Houston, TX
Indianapolis, IN

Lombard, IL
Miami, FL
Syracuse, NY
Van Nuys, CA

T 800.821.6283

F 800.892.8393

www.nicorlighting.com

2200 Midtown Pl. NE
Albuquerque, NM 87107 USA



LIT-EMFB-10PK

©2019 NICOR® • ALL RIGHTS RESERVED



NICOR[®] | **LED**