

EML5

LED Micro Emergency Light

Product Description

The EML5 LED micro emergency light lighting unit offers a you a mini sized unit for those tight spaces or a more discreet application. The EML5 Series is available in white and offers universal mounting, a test button with AC indicator, damp location listing, and a remote capable option. With fully adjustable heads, the EML5 Series complements any design application.

- Construction**
 - Injection molded thermoplastic ABS housing.
 - UL-94v-0 Flame rating - Flame Retardant
 - Adjustable heads for aiming light where required
 - Head tilt: +25°/-90°
 - Head rotation: 330°
 - Damp location rated
 - Operating temperature: 32°F - 104°F (0°C - 40°C)

- Optical System**
 - Precision engineered Prismatic Lens

- Electrical**
 - Input power 1.15W at 120/277VAC
 - Remote output power 2.4W at 3.6VDC
 - Remote option supports up to four (4) 3.6VDC NICOR remote lamps (see compatibility chart)
 - 90 minute capacity (including remote lamps)

- Mounting and installation**
 - Easy installation into a standard junction box or conduit
 - Universal mounting plate with EZ quick connect

- Finish**
 - White unpainted ABS Plastic

Photometric Data

EML5	
Input Voltage (VAC)	120/277
System Level Power (W)	1.15
Delivered Lumens (Lm)	180
System Efficacy (Lm/W)	158.1
Correlated Color Temp (K)	5835
Color Rendering Index (CRI)	74

Compatible NICOR Remote Lamps*	
	ERH1
	ERH2
	ERHWP1
	ERHWP2


**Not a complete list. Check compatibility before installation.*

Project

Catalog

Type

Date

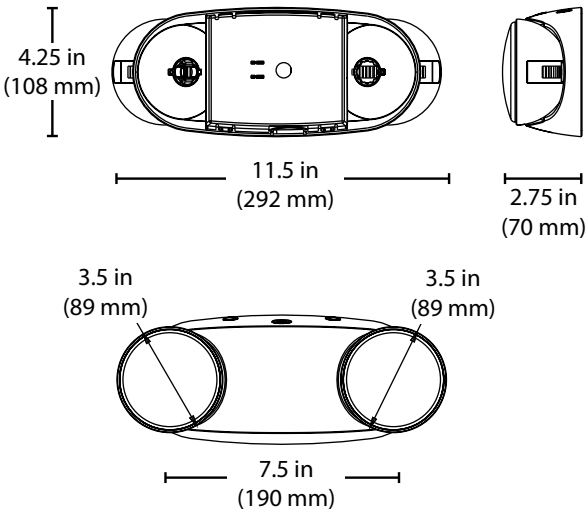

Ordering Information				Example: EML510UNVWH
Series	Version	Voltage	Housing Color	Remote Lamp Option
EML5	10 (1.0)	UNV (120-277V)	WH (white)	BLANK (non-remote)
				R (remote lamp capable)