



Metal Halide & High Pressure Sodium 30W LED Replacement Lamp

**ETL Certified for Compliance
to UL1598C and UL1993**



- High Power Factor • Self Ballasted •
- Suitable for Open & Enclosed Fixtures •
- Bright • High CRI • High Lumen Output •
- Built-in Surge Suppressors & Protection •
- 5-Years / 50,000 Hours Warranty (*) •



US Patent D762,884S
D782.081S, D782082S

Available in:

CCT 5,500K $\pm 10\%$ (CW) for MH Replacement

CCT 3,000K $\pm 10\%$ (WW) for HPS Replacement

- Simple Installation • High Lumen per Watt • Rugged Design •






Model	Product	Size	Power	Flux	Equivalent
CL-30W8-55K-E26	LED Lamp 30W 360° 55K MH Replacement	$\varnothing 3\frac{1}{2} \times 6\frac{1}{8}$ "	35W Max.	5,800 Lumen	150W MH Lamp
CL-30W8-30K-E26	LED Lamp 30W 360° 30K HPS Replacement	$\varnothing 3\frac{1}{2} \times 6\frac{1}{8}$ "	35W Max.	5,500 Lumen	150W HPS Lamp
CL-30W8-55K-E39	LED Lamp 30W 360° 55K MH Replacement	$\varnothing 3\frac{1}{2} \times 6\frac{1}{8}$ "	35W Max.	5,800 Lumen	150W MH Lamp
CL-30W8-30K-E39	LED Lamp 30W 360° 30K HPS Replacement	$\varnothing 3\frac{1}{2} \times 6\frac{1}{8}$ "	35W Max.	5,500 Lumen	150W HPS Lamp

- 120-277Vac ~50/60Hz • PF > 0.9 • Med. (E26) or Mogul (E39) Lamp Base • ~165 lm/W • CRI > 75 •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • CCT 5500K (55K) or 3000K (30K) $\pm 10\%$ •



30W Cluster LED Lamp

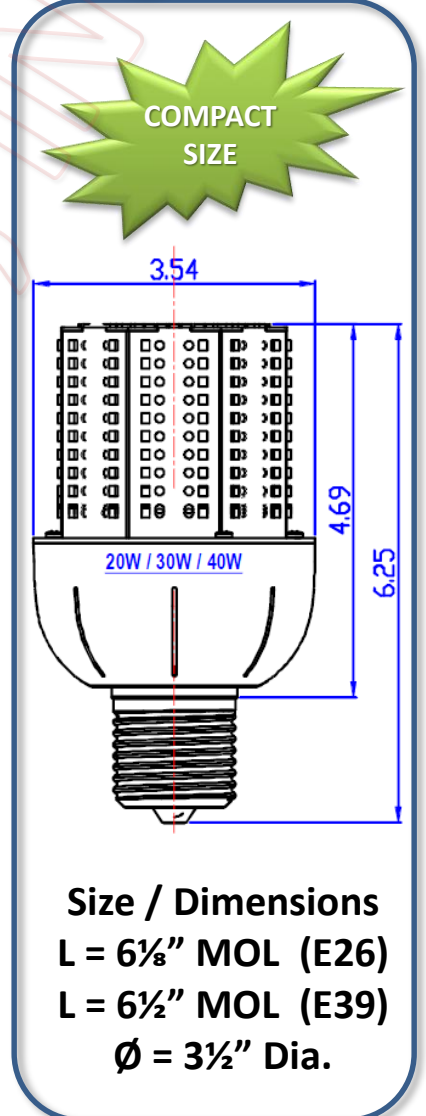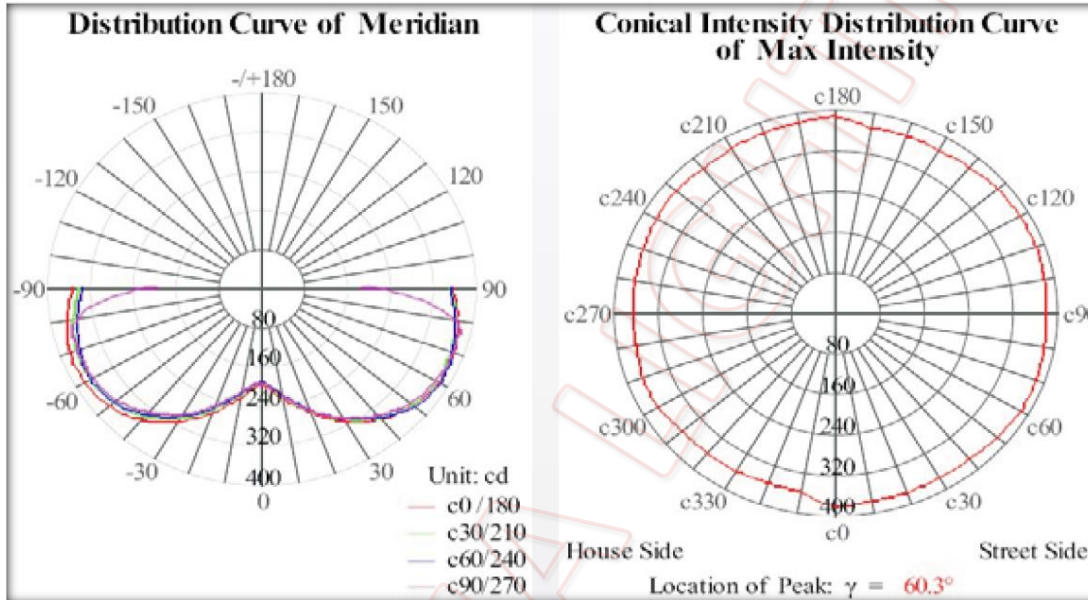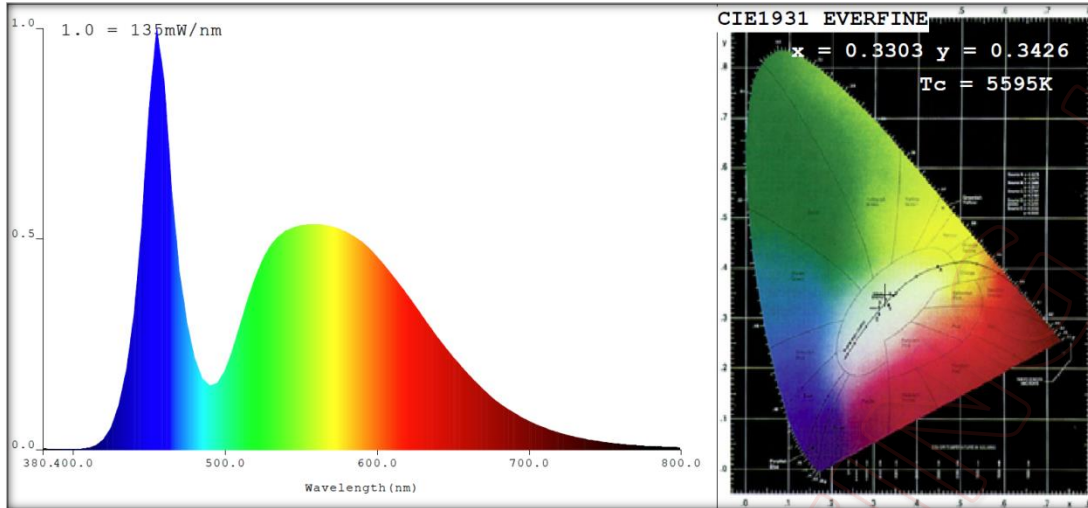

Model	Product	Power	Equivalent
CL-30W8-xxK-Enn	Cluster LED Bulb	35W	150W MH/HPS
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	35W Max. P.F. $\approx$ 0.97	$\sim$ 165 lm/W	5,800 Lumen (CW) 5,500 Lumen (WW)
Color Rendering	Color Temperature	Beam Angle	Life
CRI $\div$ 75~80	30K $\div$ CCT 3,000K $\pm$ 10% 55K $\div$ CCT 5,500K $\pm$ 10%	360 $^\circ$	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25 $^\circ$ C Max.