

ESB 64250 HLX

54261



Product features

- Precise filament alignment with patented quartz pinch technology
- OSRAM HLX XENOPHOT lamps provide 10% higher luminous efficacy over standard halogen
- Instant on and nearly constant luminous flux over the life of the lamp
- Dimmable

Areas of application

- Microscopy
- Laboratory & Analysis
- UV Curing
- Fiber Illumination
- Surgical & Dental Overhead
- Club & Disco

Technical data

General product information

Product Number	54261
Product Name	ESB64250HLX 6V 40/CS 1/SKU
Ordering Abbreviation	ESB 64250 HLX
Brand Name	OSRAM
General Description	20 Watt, tungsten halogen, low voltage without reflector
Application	Projector
LIF Code	M/30

Electrical data

Nominal Wattage	20 W
Nominal Voltage	6 V
Type of Current	AC

Light technical data

Luminous Flux	460
Rated Lumens	460
Light Center Length - LCL (in)	0.761 in
Light Center Length - LCL (mm)	19.5 mm
Color Temperature	3350 K
Color Rendering Index	100
Average Rated Life	100 h

Physical attributes


Base	G4 Bipin
Bulb Shape	T9
Maximum Overall Length (in)	1.209 mm
Maximum Overall Length (mm)	31
Length l (in)	1.209 in
Length l (mm)	31 mm
Diameter d (in)	0.354 in
Diameter d (mm)	9.00 mm
Distance a (in)	0.761 in
Distance a (mm)	19.5 mm
Filament Dimensions Length (in)	0.031 in
Filament Dimensions Length (mm)	0.8 mm

Product datasheet

Filament Dimensions Width (in)	0.090 in
Filament Dimensions Width (mm)	2.3 mm
Reflector Coating	9.00

Additional product data

Operating Position	Any
Class	C (gas)
Method of Operation	HLX

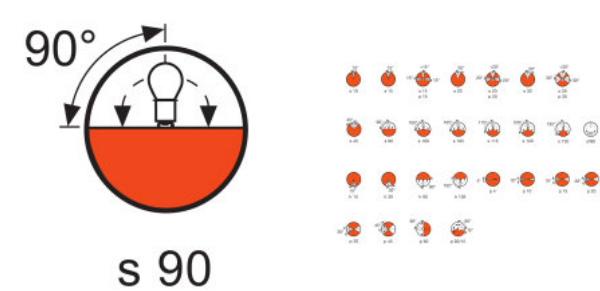

Download Data

File	
	Brochures Laboratory Lamps US version (EN)
	Brochures Medical Brochure PIA (EN) (NAFTA)

Packaging Information

Product number	EAN/UPC	Packaging	Quantity	Outside dimensions l x w x h	Gross weight
54261	4050300012407	Folding box (SKU)	1	1 in x 0.9 in x 2.8 in	
54261	4050300890999	Shipping box (Case)	40	5.7 in x 4.2 in x 4.8 in	0.4 lb

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

OSRAM does not accept liability for errors, changes and omissions.