



CorePro MainsFit (UL Type-B) T8

15.5T8-6U/COR/24-850/MF21/G 10/1

The CorePro MainsFit (UL Type B) lamps are designed to be the perfect retrofit solution to move from traditional fluorescent lamps to energy saving LEDs. This ballast bypass lamp has everything needed built into the lamp with proven energy savings, long life (up to 50k hours), surge suppression and industry leading safety features. All lamps in the CorePro MainsFit family are double-ended to help simplify the installation. In addition, all lamps meet the Philips standards for light quality so that end users will be in a comfortable environment regardless of the CorePro MainsFit lamp type.

Product data

General Information	
Lighting Technology	LED
Switching Cycle	50,000
Nominal lifetime	50,000 hour(s)
Cap-Base	2G13 [2G13]
Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	180 degree(s)
Luminous Flux	2,100 lumen
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	135.00 lm/W
Color Consistency	<5
Color rendering index (CRI)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %


Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	15.5 W
Wattage Equivalent	32 W
Starting Time (Nom)	0.9 s
Warm-up time to 60% light	0.9 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V
Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	124 °F
Controls and Dimming	
Dimmable	No

CorePro MainsFit (UL Type-B) T8

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	23-5/8 inch
Bulb Shape	Tube, double-ended
Approval and Application	
Energy Saving Product	Yes
Approval Marks	UL certificate RoHS compliance DLC compliance
Energy Consumption kWh/1000 h	- kWh
Energy Certifications	DLC Standard


EU RoHS compliant	Yes
Product Data	
Order product name	15.5T8-6U/COR/24-850/MF21/G 10/1
Order code	535567
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929001934904
Full product name	15.5T8-6U/COR/24-850/MF21/G 10/1
EAN/UPC - Case	50046677535563

Dimensional drawing

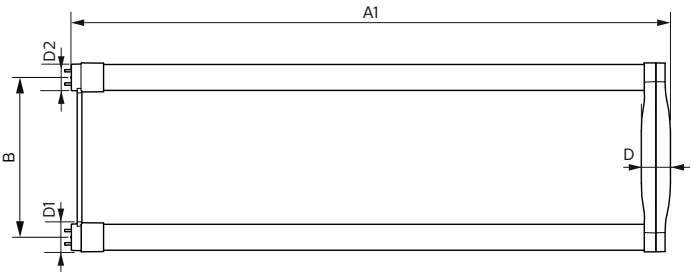


Product	D1	D2	B	A1	D
15.5T8-6U/COR/24-850/MF21/G 10/1	25.7 mm	28.1 mm	152 mm	570 mm	27.9 mm

Photometric data

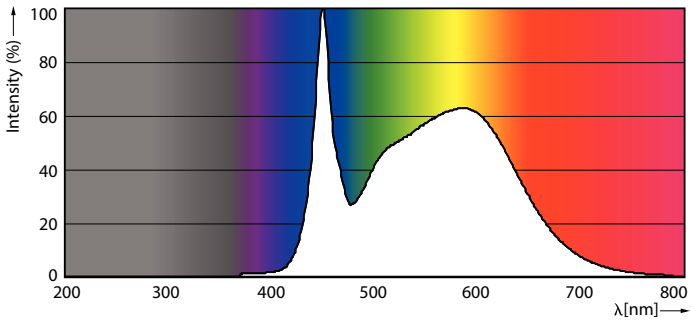


Spectral Power Distribution Colour - 15.5T8-6U/COR/24-850/MF21/G 10/1



Light Distribution Diagram - 15.5T8-6U/COR/24-850/MF21/G 10/1





CorePro MainsFit (UL Type-B) T8

Photometric data



General uniform lighting - 15.5T8-6U/COR/24-850/MF21/G 10/1

Lifetime

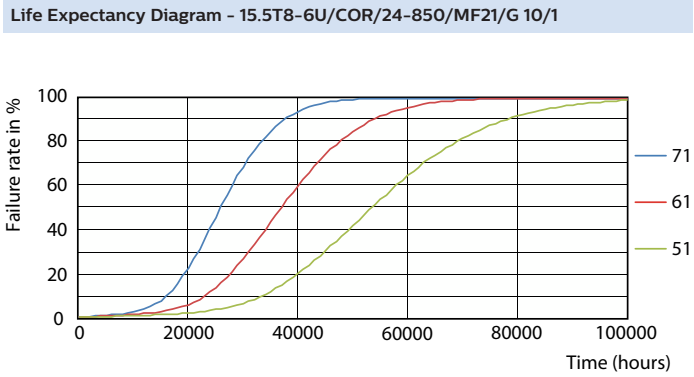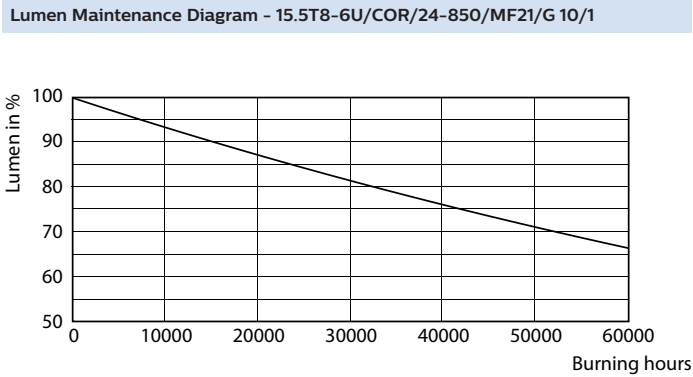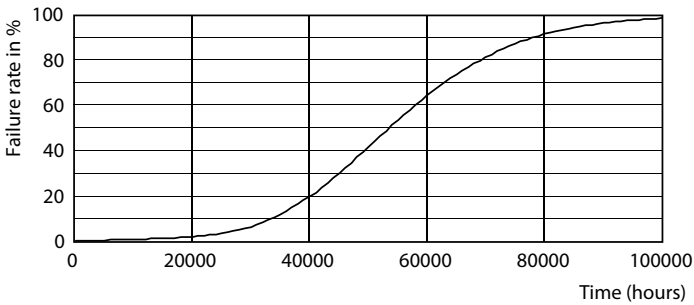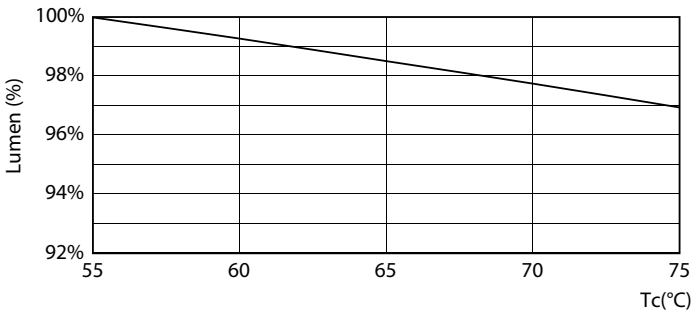


Lumen Maintenance Diagram - 15.5T8-6U/COR/24-850/MF21/G 10/1

Life Expectancy Diagram - 15.5T8-6U/COR/24-850/MF21/G 10/1

CorePro MainsFit (UL Type-B) T8

Lifetime

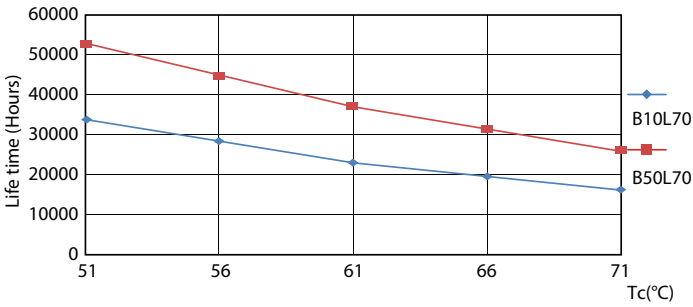

Life Expectancy Diagram - 15.5T8-6U/COR/24-850/MF21/G 10/1

