



LED A15

6.6A15/PER/UD50/CL/G/E26/DIM2PF T20

Philips A15 LED Lamps offer energy saving ambience with an elegant effect. Their unique design provides light in all directions, giving lighting designers a long life alternative to standard incandescent sources.


Product data

General information	
Cap-Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000
Light technical	
Color Code	950 [CCT of 5000K]
Beam Angle (Nom)	300 °
Luminous Flux (Nom)	750 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	113 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	95
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	60 Hz
Power (Nom)	6.6 W
Lamp Current (Nom)	65 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.4 s

Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Ambient (Max)	40 °C
T-Ambient (Min)	-20 °C
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	A15 [A 15mm]

Product data	
Order product name	6.6A15/PER/UD50/CL/G/E26/DIM2PF T20
EAN/UPC - Product	50046677573404
Order code	929003084503
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929003084503
Net Weight (Piece)	0.024 kg


Dimensional drawing




6.6A15/PER/UD50/CL/G/E26/DIM2PF T20

Product	D	C
6.6A15/PER/UD50/CL/G/E26/DIM2PF T20	47.5 mm	84 mm


Photometric data



Light Distribution Diagram



General uniform lighting

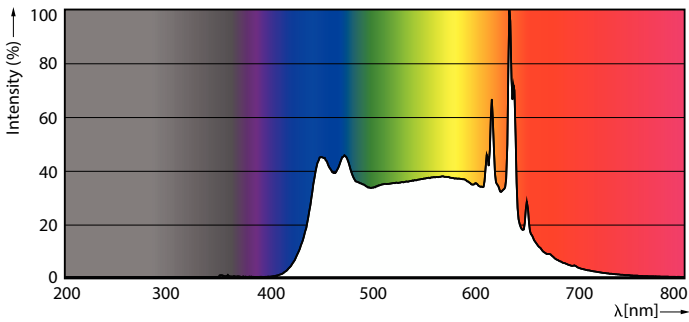

Spectral Power Distribution Colour

LED A15

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram

