

T8

42T8HO/COR/96-840/MF54/G/FA8 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.


Product data

General information		Power (Rated) (Nom)	42 W
Base	FA8 [FA8]	Lamp Current (Max)	400 mA
EU RoHS compliant	Yes	Lamp Current (Min)	180 mA
Nominal Lifetime (Nom)	50000 h	Wattage Equivalent	96 W
Switching Cycle	50000	Starting Time (Nom)	0.5 s
Tier	CorePro	Warm Up Time to 60% Light (Nom)	0.5 s
Light technical		UL Type	Type B - bypass the ballast
Color Code	841 [CCT of 4100K (841)]	Power Factor (Nom)	0.9
Beam Angle (Nom)	240 °	Voltage (Nom)	120-277 V
Initial lumen (Nom)	5400 lm	Temperature	
Color Designation	Cool White (CW)	T-Ambient (Max)	113 °F
Correlated Color Temperature (Nom)	4000 K	T-Ambient (Min)	-4 °F
Luminous Efficacy (rated) (Nom)	128.00 lm/W	T-Storage (Range)	-40 °C to 65 °C
Color Consistency	<6	T-Storage (Max)	149 °F
Color Rendering Index (Nom)	80	T-Storage (Min)	-40 °F
LLMF At End Of Nominal Lifetime (Nom)	70 %	T-Case Maximum (Nom)	131 °F
Operating and electrical			
Input Frequency	50 to 60 Hz		

Controls and dimming	
Dimmable	Limited
Mechanical and housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	94-1/2 in
Bulb Shape	Tube, double-ended
Approval and application	
Energy Saving Product	Yes
Approbation Marks	RoHS compliance UL certificate DLC compliance

Application conditions	
Ambient temperature range	-20 °C to 45 °C
Product data	
Order product name	42T8HO/COR/96-840/MF54/G/FA8 10/1
EAN/UPC - Product	046677575137
Order code	575134
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929003099404
Net Weight (Piece)	0.882 lb
Model Number	9290030994



Dimensional drawing

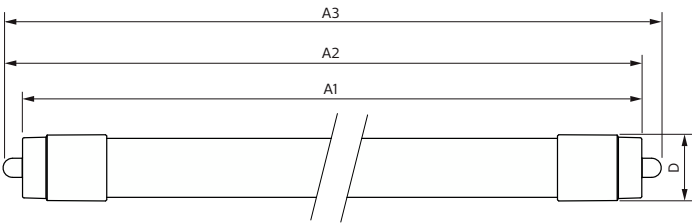

Product	D2	A1	A2	A3
42T8HO/COR/96-840/ MF54/G/FA8 10/1	1-1/8 in	93-5/16 in	93-11/16 in	94-1/16 in

42T8HO/COR/96-840/MF54/G/FA8 10/1


Photometric data



LEDtube COR 8ft 42W FA8 5400lm-LDD


LEDtube COR 8ft 42W FA8 5400lm 840-GUL

Photometric data

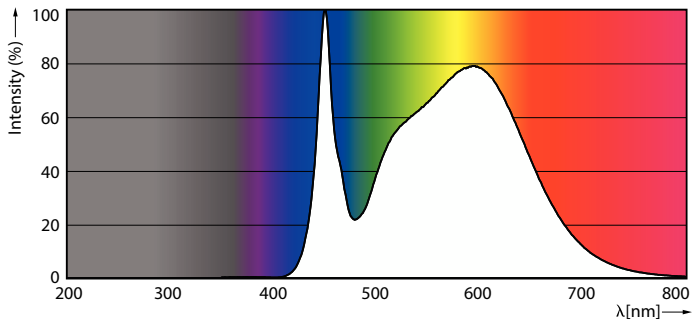


LEDtube COR 8ft 42W FA8 5400lm 840-POC


Lifetime

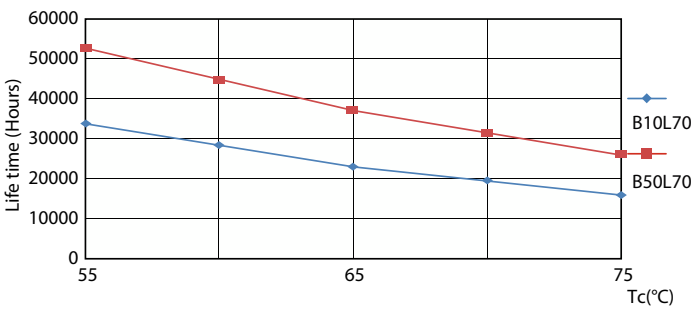


LEDtube COR 8ft 42W 50K LifetimeVsTc-LED

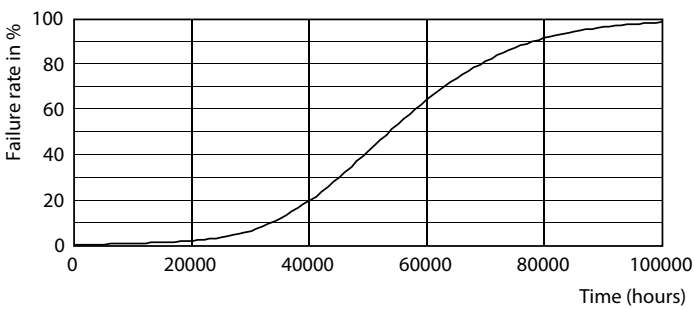

Life Expectancy Diagram

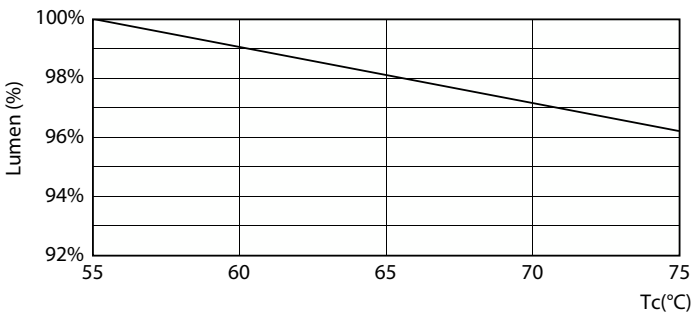


LEDtube COR 8ft 42W 50K LumenVsTc-LMP

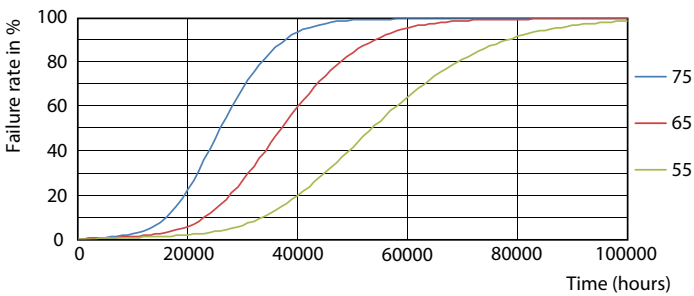

LEDtube COR 8ft 42W 50K FailureRate-LED

Lifetime

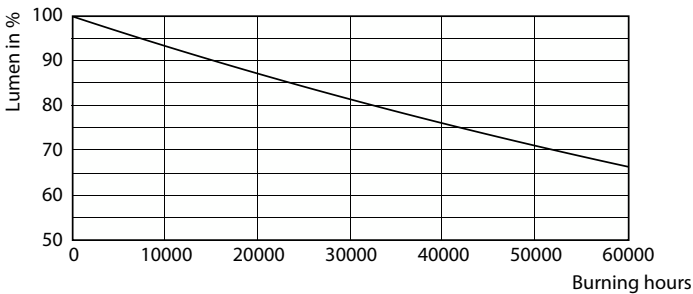

Lumen Maintenance Diagram

