



Contractor-grade Plastic (Non-Dimmable) A-Shape Lamps

10A19/CNG/830/FR/P/E26/ND 4/1CT

Most affordable A19 lamp ideal for residential, back of house closets.

Product data

General Information	
Cap-Base	E26
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	150 degree(s)
Luminous Flux	1,000 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	100 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	60 Hz
Power Consumption	10 W
Lamp Current (Nom)	185 mA
Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	194 °F
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted

Contractor-grade Plastic (Non-Dimmable) A-Shape Lamps

Bulb Material	Plastic
Bulb Shape	A19
UL Wet/ damp/ dry location	Damp location
Net Weight (Piece)	0.066 lb

Approval and Application

EU RoHS compliant	Yes
T20 compliant	No
Ambient temperature range	-4 to +113 °F


Application Conditions

can it be used in closed luminaires	No
-------------------------------------	----

Product Data


Order product name	10A19/CNG/830/FR/P/E26/ND 4/1CT
Full product name	10A19/CNG/830/FR/P/E26/ND 4/1CT
Order code	588905
Material Nr. (12NC)	929003798364
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677588908
Numerator - Packs per outer box	4
EAN/UPC - Case	50046677588903

Dimensional drawing




Product	D	C
10A19/CNG/830/FR/P/E26/ND 4/1CT	2-3/8 inch	4-3/16 inch

Photometric data

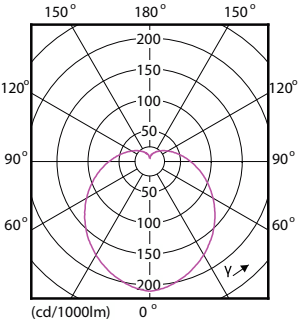


Light Distribution Diagram - 10A19/CNG/830/FR/P/E26/ND 4/1CT

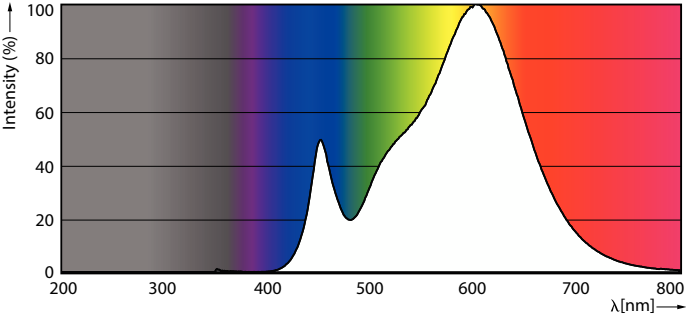

Spectral Power Distribution Colour - 10A19/CNG/830/FR/P/E26/ND 4/1CT

Contractor-grade Plastic (Non-Dimmable) A-Shape Lamps


Photometric data



Catalan Photometrics 4.5 Flare Lighting 8.5 Page 51

General uniform lighting - 10A19/CNG/830/FR/P/E26/ND 4/1CT

Lifetime

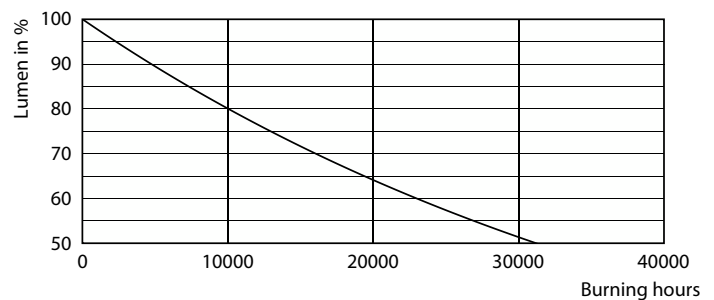

Life Expectancy Diagram

Lumen Maintenance Diagram - 10A19/CNG/830/FR/P/E26/ND 4/1CT

