



MSR Gold™ SA Double Ended

MSR Gold™ 1510 SA/1 DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Product data

General Information		Operating and Electrical	
Cap-Base	SFC10-4 [SFC10-4]	Power (Rated) (Nom)	1510 W
Operating Position	UNIVERSAL [Any or Universal (U)]	Lamp Current (Nom)	13.4 A
Main Application	Entertainment	Ignition Supply Voltage (Min)	198 V
Life To 50% Failures (Nom)	750 h	Controls and Dimming	
System Description	SA/DE	Dimmable	Yes
Light Technical		Mechanical and Housing	
Color Code	- [Not Specified]	Cap-Base Information	SFC10-4
Luminous Flux (Nom)	141000 lm	Luminaire Design Requirements	
Chromaticity Coordinate X (Nom)	330	Bulb Temperature (Max)	950 °C
Chromaticity Coordinate Y (Nom)	338	Pinch Temperature (Max)	450 °C
Correlated Color Temperature (Nom)	5600 K	Product Data	
Luminous Efficacy (rated) (Nom)	94 lm/W	Full product code	871869653613100
Color Rendering Index (Nom)	90		

MSR Gold™ SA Double Ended


Order product name	MSR Gold™ 1510 SA/1 DE 1CT/4
EAN/UPC - Product	8718696536131
Order code	928410005115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

Material Nr. (12NC)	928410005115
Net Weight (Piece)	34.000 g

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

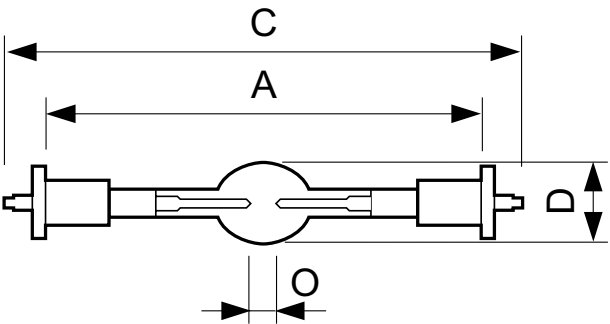


MSR GOLD 1510 SA/1 DE

Product	A (max)	A (min)	A	C (max)	D (max)	Ø
MSR Gold™ 1510 SA/1 DE 1CT/4	115.2 mm	114.4 mm	114.8 mm	136 mm	23 mm	7 mm

Photometric data

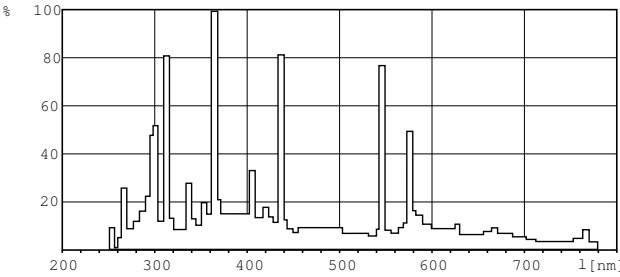

MSR Gold™ 1200 SA/DE, MSR Gold™ 1510 SA/DE

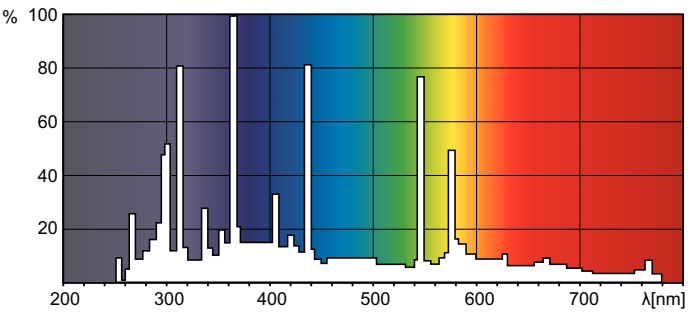

MSR Gold™ 1200 SA/DE, MSR Gold™ 1510 SA/DE

MSR Gold™ SA Double Ended

