



PAR38 LED

11.3PAR30S/PER/930/F25/DIM/120V 6/1FBT20

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	11.3-75W
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	25 °
Luminous Flux (Nom)	850 lm
Luminous Flux (Rated) (Nom)	850 lm
Luminous Intensity (Nom)	4500 cd
Color Designation	White (WH)
Rated Beam Angle	25 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	75.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	11.3 W
Lamp Current (Nom)	120 mA
Wattage Equivalent	75 W


Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	90 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Suitable For Accent Lighting	Yes
Product Data	
Order product name	11.3PAR30S/PER/930/F25/DIM/120V 6/1FBT20
EAN/UPC - Product	046677535391
Order code	929001854104
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001854104
Net Weight (Piece)	0.220 kg

PAR38 LED

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005



Dimensional drawing




PAR30S 120V 12-90W 950lm 25D 3000K E26

Product	D	C
11.3PAR30S/PER/930/F25/DIM/120V 6/1FBT20	94.8 mm	93.1 mm

Photometric data

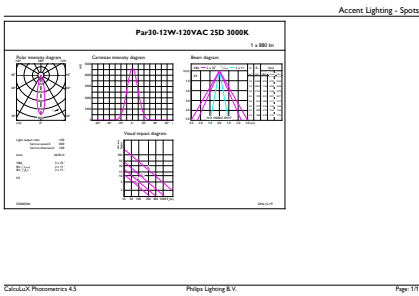


LEDspot E26 25°

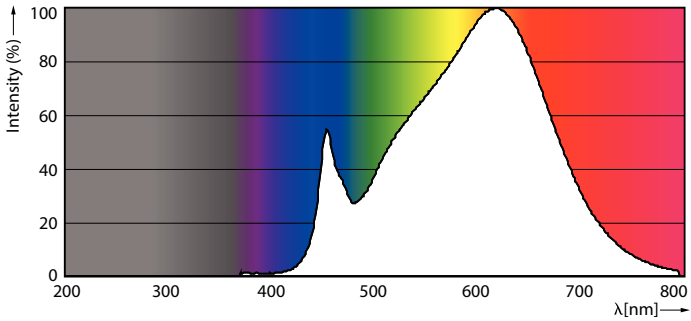


LEDspot E26

PAR38 LED

Lifetime

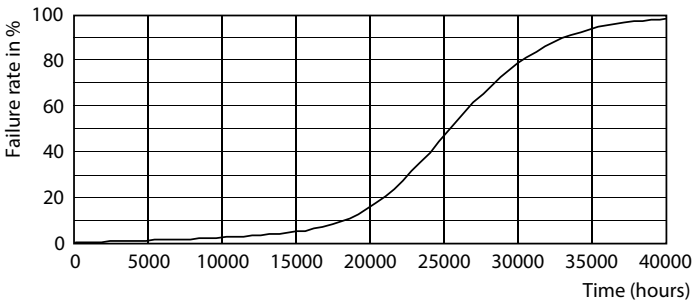

LEDspot E26

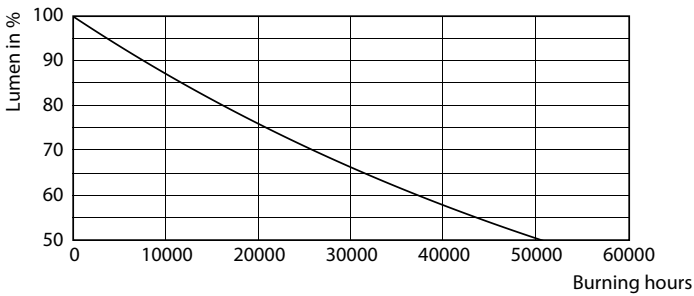

LEDspot E26

