

Centium T5HO

CENTIUM ELE BALLAST (2) F54T5/HO 120-277V

No matter what the conditions require, operating at a variety of line voltages between 120V to 480V, whether located in high ambient temperature environments (requiring a 90° C rating) or not, our family of Philips Advance Centium ballasts are ideal for a wide variety of applications.

Product data

• General Characteristics

Lamp Type F54T5/HO Number of Lamps 1/2 piece Input Voltage 120-277 V Line Frequency 50/60 Hz Ballast Type Electronic Fluorescent Base Model ICN2S54T Housing Housing Dimensions 14.17" x 1.18" x 1.06" Metal Housing Material Suitable for Outdoor Yes **Programmed Start** Starting Method

Centium

• Operating Characteristics

Family Name

Automatic restart Yes Ignition time 1.5 s 120-117 W Input Power Gear Ballast factor Ballast Efficacy Factor 0.83 -Power Factor 0.98 Lamp Current Crest 1.7 -Factor Sound Rating Max THD 10 %

Wiring Characteristics

Color input terminals
Color output terminals
RED, YEL & BLU
RED, YEL & BLU

Connector type Poke-In
Wire Striplength 0.375 mm
Lamp Connection Series
Wire Gauge 18AWG

Wire Length by No wires Color Solid Wire Type Allowed Wiring Yes Config(Remote) Allowed Wiring Yes Config(Tandem) Allowed Wiring Yes Config(Through) Max Dist. Ball to 20' Lamp(Remote) Max Dist. Ball to Blue = 20' Lamp(Tandem) Blue = 20' Max Dist.Ball to Lamp(Through)

• System Chars on driver level

Rated Lamp Watts 54W

• Temperature Characteristics

T-case maximum 70 C

• Product Dimensions

 Length A1
 14.17 in

 Length A2
 13.78 in

 Width B1
 1.18 in

 Height C1
 1.06 in

• Approval & Application Chars

EMC Immunity FCC Non-Consumer
Approbation Marks UL, CSA, RoHS
UL Listed Yes
CSA certificate Yes



Centium T5HO

CEC Listing	No No
Circle E logo	No
CSA E	No
cUL certificate	No
DOE	No
Energy Star	No
FIDE Certificate	No
NEMA Premium	No
NOM certificate	No
RoHS Compliant	Yes
SASO Certificate	No
UL Recognized	No

• Product Data

Product number ICN2S54T35M
Full product name ELE BALLAST (2) F54T5/HO 120-277V
Short product name ELE BALLAST (2) F54T5/HO 120-277V
Pieces per Sku 1
Skus/Case 18
Bar code on pack 781087131787

Bar code on pack /8108/13178/
Bar code on case 50781087131799
Logistics code(s) 913701253302
eop_net_weight_pp 0.441 kg

CENTIUM ELE BALLAST (2) F54T5/HO 120-277V

14,17

13.78

ELE BALLAST (2) F54T5/HO


120-277V


A1 (Norm) A2 (Norm) A3 (Norm) B1 (Norm) C1 (Norm)

1.18

1.06

Dimensional drawing

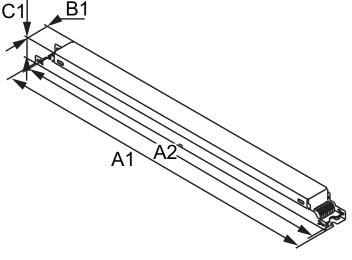



For I lamp operation, do not use yellow leads



Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

