



# Architectural MSD

## MSD 1200.1CT/3

The high luminous efficacy and optimal lamp filling of the single ended Architectural MSD lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

### Product data


General Information	
Cap-Base	G22 [ G22]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Main Application	Studio/Disco
Life To 50% Failures (Nom)	2000 h
System Description	-
Light Technical	
Color Code	- [ Not Specified]
Luminous Flux (Nom)	92000 lm
Chromaticity Coordinate X (Nom)	323
Chromaticity Coordinate Y (Nom)	328
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	78 lm/W
Color Rendering Index (Nom)	80
Operating and Electrical	
Power (Rated) (Nom)	1200 W
Lamp Current (Nom)	13.8 A
Ignition Supply Voltage (Min)	207 V

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	30 mm x 53 mm
Luminaire Design Requirements	
Bulb Temperature (Max)	600 °C
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	872790091135000
Order product name	MSD 1200.1CT/3
EAN/UPC - Product	8727900911350
Order code	928172005114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	3
Material Nr. (12NC)	928172005114
Net Weight (Piece)	0.156 kg

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




MSD 1200

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSD	42.5 mm	14.0	84 mm	86 mm	85	183 mm	54 mm	53	52 mm
1200.1CT/3		mm			mm			mm	

Photometric data

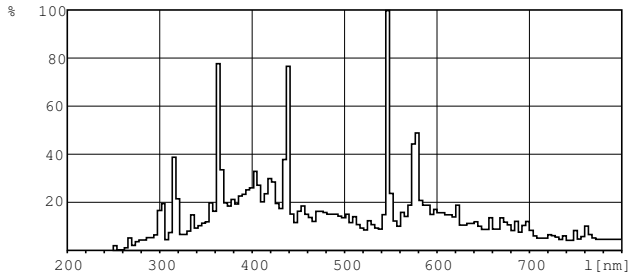

MSD

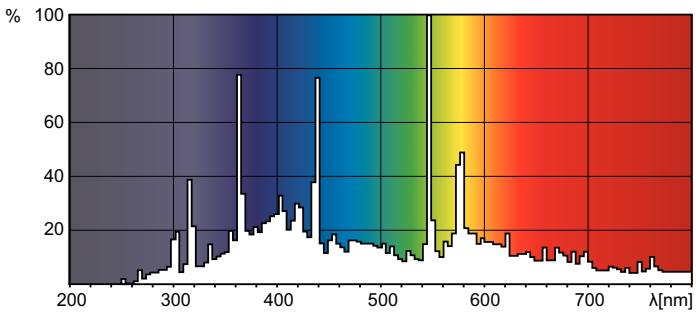

MSD

