



MasterClass LEDtube InstantFit T8

7T8/MAS/24-835/IF10/P 10/1.

Product data


General Information		Power Factor (Nom)		0.9
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Voltage (Nom)		120-277, 347 V
Nominal Lifetime (Nom)	70000 h			
Switching Cycle	50000X	Temperature		
B50L70	70000 h	T-Ambient (Max)		45 °C
		T-Ambient (Min)		-20 °C
		T-Storage (Max)		65 °C
		T-Storage (Min)		-40 °C
		T-Case Maximum (Nom)		50 °C
Light Technical		Controls and Dimming		
Color Code	835 [CCT of 3500K]	Dimmable		No
Beam Angle (Nom)	180 °			
Initial lumen (Nom)	1100 lm	Mechanical and Housing		
Luminous Flux (Rated) (Nom)	1100 lm	Product Length		600 mm
Rated Beam Angle	180 °			
Correlated Color Temperature (Nom)	3500 K	Approval and Application		
Color Consistency	<6	Energy Saving Product		Yes
Color Rendering Index (Nom)	80	Approbation Marks		RoHS compliance UL certificate DLC compliance
LLMF At End Of Nominal Lifetime (Nom)	70 %	DesignLights Consortium Qualified Product List		DesignLights Consortium Qualified Product List
Operating and Electrical				
Input Frequency	20K to 120K Hz			
Power (Rated) (Nom)	7 W			
Lamp Current (Max)	240 mA			
Lamp Current (Min)	80 mA			
Starting Time (Nom)	0.5 s			
Warm Up Time to 60% Light (Nom)	0.5 s			

MasterClass LEDtube InstantFit T8

Product Data	
Order product name	7T8/MAS/24-835/IF10/P 10/1.
EAN/UPC - Product	046677541828
Order code	541821
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10




Material Nr. (12NC)	929001987004
Net Weight (Piece)	0.080 kg
Model Number	9290019870

Dimensional drawing

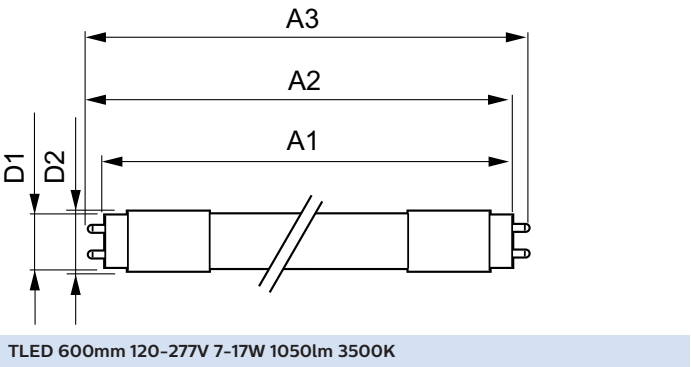



Product	D1	D2	A1	A2	A3
7T8/MAS/24-835/IF10/P 10/1	25.7 mm	26.3 mm	588.6 mm	595.7 mm	602.8 mm

Photometric data

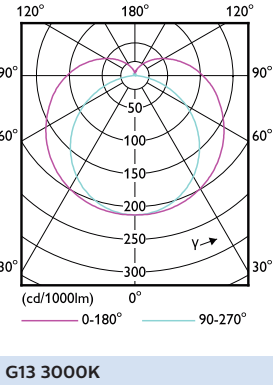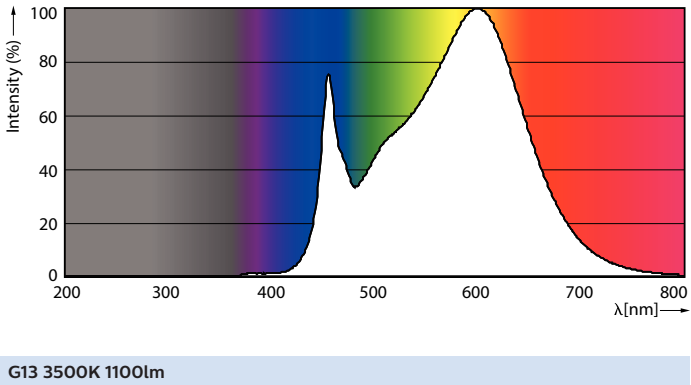


MasterClass LEDtube InstantFit T8


Lifetime

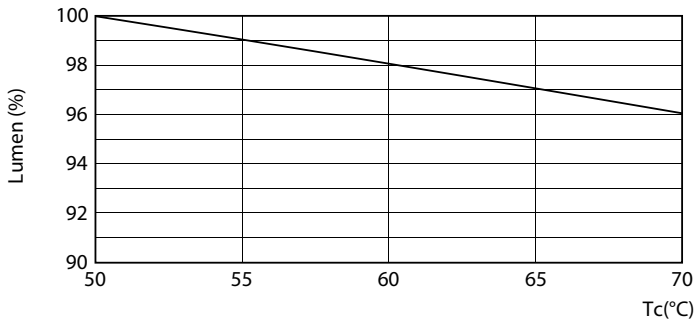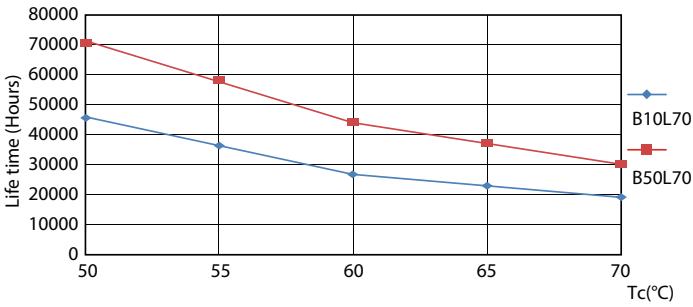


G13 3000K

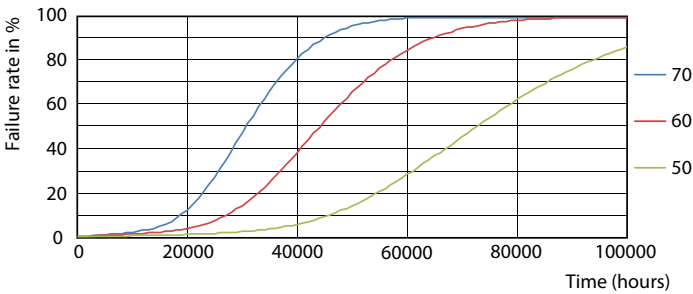

G13 3000K 1100lm

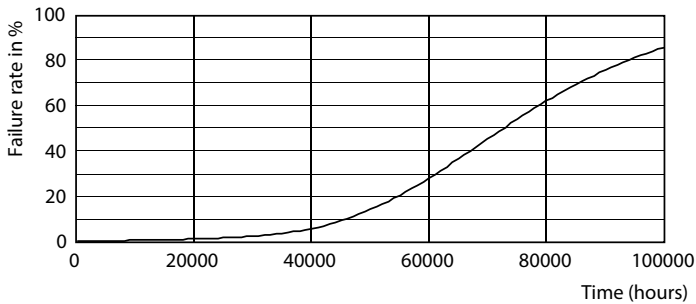

G13 3000K

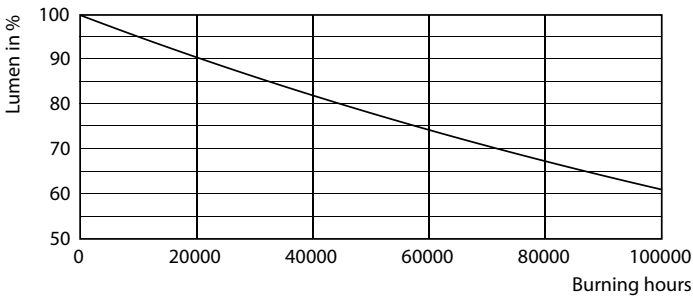

G13 3000K

G13 3000K

MasterClass LEDtube InstantFit T8

