



Turning Light into Savings ▶▶▶



FDL Floodlight

13W, 28W, 50W

naturaLED® floodlights provide a range of size and wattages to fit your needs. Our small flood lights create bright, security and spot lighting for a variety of applications such as perimeter, entryway, facades, landscapes, retail and residential complexes and architectural lighting.

Available in three power levels and flood beam distributions, to replace up to 250 watt. Yoke-arm design can be adjustable to the angle best suit your needs.

Key Features & Benefits

- ▶ Yoke-Style Arm
- ▶ High Powered LED Array
- ▶ Excellent thermal design
- ▶ Uniform and consistent color
- ▶ Aluminium die cast housing
- ▶ Operating Temp: -22°F~122°F
- ▶ 120-277V
- ▶ 50,000 hrs rated average life
- ▶ 6-foot whip power cord
- ▶ 1/2" stainless steel threaded nipple (Apply for 13W & 28W)
- ▶ 3/4" stainless steel threaded nipple (Apply for 50W)

Applications

- ▶ Security Lighting
- ▶ Architectural Lighting
- ▶ Perimeter Lighting
- ▶ Entryway/ Pathway Lighting

Color Choices



Black




White

Qualifications









Item Code	Description	Color Temp	Wattage	Lumen Output	Equivalent Wattage	Voltage (V)	CRI	Beam Angle	Color	Rated Hours			
7513	LED-FXFDL13/40K/BK	4000K	13	1,301	75	120-277	72	Flood	Black	50,000	●	●	●
7514	LED-FXFDL13/50K/BK	5000K	13	1,319	75	120-277	72	Flood	Black	50,000	●	●	●
7515	LED-FXFDL28/40K/BK	4000K	28	3,010	175	120-277	72	Flood	Black	50,000	●	●	●
7516	LED-FXFDL28/50K/BK	5000K	28	3,084	175	120-277	72	Flood	Black	50,000	●	●	●
7517	LED-FXFDL50/40K/BK	4000K	50	5,621	250	120-277	72	Flood	Black	50,000		●	●
7518	LED-FXFDL50/50K/BK	5000K	50	5,741	250	120-277	72	Flood	Black	50,000		●	●
7544	LED-FXFDL13/40K/WH	4000K	13	1,301	75	120-277	72	Flood	White	50,000	●	●	●
7545	LED-FXFDL13/50K/WH	5000K	13	1,319	75	120-277	72	Flood	White	50,000	●	●	●
7546	LED-FXFDL28/40K/WH	4000K	28	3,010	175	120-277	72	Flood	White	50,000	●	●	●
7547	LED-FXFDL28/50K/WH	5000K	28	3,084	175	120-277	72	Flood	White	50,000	●	●	●
7558	LED-FXFDL50/40K/WH	4000K	50	5,621	250	120-277	72	Flood	White	50,000		●	●
7559	LED-FXFDL50/50K/WH	5000K	50	5,741	250	120-277	72	Flood	White	50,000		●	●

► Dimensions

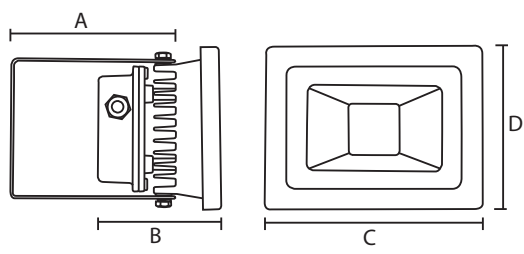	Wattage	A	B	C	D	Weight (lbs)
	13	4.20-in	3.80-in	4.50-in	3.40-in	1.89
	28	5.70-in	4.10-in	7.10-in	5.50-in	3.42
	50	6.80-in	5.40-in	8.80-in	7.30-in	6.66

► Illuminance Distribution

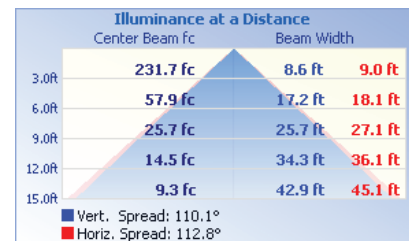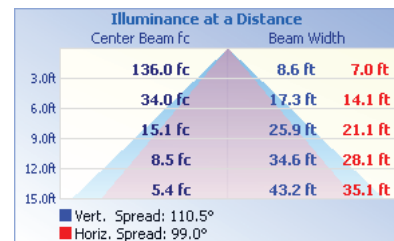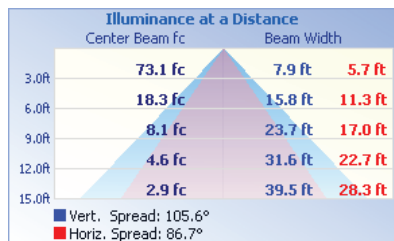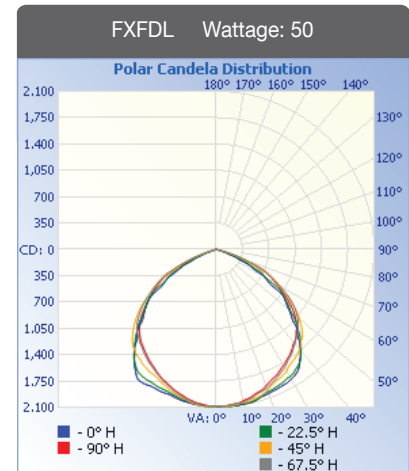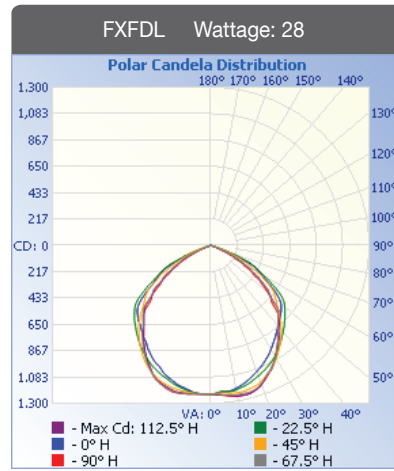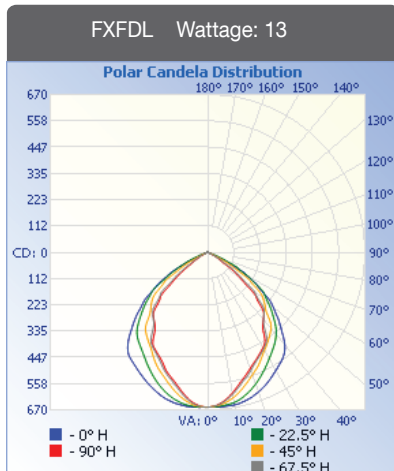

► Master Carton Package

