

naturaLED®

Turning Light into Savings ▶▶▶

SWP Slim Wall Pack

15W, 29W, 50W

naturaLED® SWP is our slim, low-profile wall pack with smooth contemporary design. Well engineered high quality die-cast aluminum which delivers bright, crisp light.

Excellent thermal design ensures our SWP's performance over the life.

Installation made simple and easy with a hinged junction box. Our Slim-Wallpacks are available in 15 watt, 29 watt, and 50 watt with color options of White, Black and Bronze. Optional ½" knuckle mount or adjustable swivel bracket provide you the flexibility for your application.

SWP is ideal for landscape, wall/surface, low level pathway, apartment buildings, schools, multi-use facilities.

Key Features & Benefits

- ▶ DesignLights Consortium Certified
- ▶ Uniform and consistent color
- ▶ Aluminum die cast housing
- ▶ Excellent thermal design
- ▶ CRI:70
- ▶ Universal Voltage 120-277V
- ▶ Operating Temp: -22°F~122°F
- ▶ 50,000 Hours rated average life
- ▶ Photocell sensor compatible

Applications

- ▶ Security Lighting
- ▶ Pathway Lighting
- ▶ Perimeter Lighting
- ▶ Entryway Lighting

3 Color Choices



Qualifications



Item Code	Description	Color Temp	Wattage	Lumen Output	Depth	Equivalent Wattage	CRI	Finish	Rated Life				
7462	LED-FXSWP15/40K/BK	4000K	15	1,740	4-in	75W	70	Black	50,000	●	●	●	●
7463	LED-FXSWP15/50K/BK	5000K	15	1,797	4-in	75W	70	Black	50,000	●	●	●	●
7452	LED-FXSWP29/40K/BK	4000K	29	3,268	4-in	175W	70	Black	50,000	●	●	●	●
7453	LED-FXSWP29/50K/BK	5000K	29	3,329	4-in	175W	70	Black	50,000	●	●	●	●
7548	LED-FXSWP50/40K/BK	4000K	50	5,508	4-in	250W	70	Black	50,000		●	●	●
7549	LED-FXSWP50/50K/BK	5000K	50	5,856	4-in	250W	70	Black	50,000		●	●	●
7464	LED-FXSWP15/40K/WH	4000K	15	1,740	4-in	75W	70	White	50,000	●	●	●	●
7465	LED-FXSWP15/50K/WH	5000K	15	1,797	4-in	75W	70	White	50,000	●	●	●	●
7460	LED-FXSWP29/40K/WH	4000K	29	3,268	4-in	175W	70	White	50,000	●	●	●	●
7461	LED-FXSWP29/50K/WH	5000K	29	3,329	4-in	175W	70	White	50,000	●	●	●	●
7550	LED-FXSWP50/40K/WH	4000K	50	5,508	4-in	250W	70	White	50,000		●	●	●
7551	LED-FXSWP50/50K/WH	5000K	50	5,856	4-in	250W	70	White	50,000		●	●	●
7572	LED-FXSWP15/40K/DB	4000K	15	1,740	4-in	75W	70	Bronze	50,000	●	●	●	●
7573	LED-FXSWP15/50K/DB	5000K	15	1,797	4-in	75W	70	Bronze	50,000	●	●	●	●
7574	LED-FXSWP29/40K/DB	4000K	29	3,268	4-in	175W	70	Bronze	50,000	●	●	●	●
7575	LED-FXSWP29/50K/DB	5000K	29	3,329	4-in	175W	70	Bronze	50,000	●	●	●	●
7576	LED-FXSWP50/40K/DB	4000K	50	5,508	4-in	250W	70	Bronze	50,000		●	●	●
7577	LED-FXSWP50/50K/DB	5000K	50	5,856	4-in	250W	70	Bronze	50,000		●	●	●

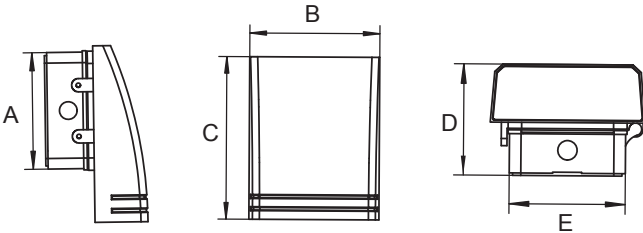
Accessories

P10005	MT-SB-SWP/BK	Swivel Bracket Mount (Black)
P10006	MT-KNC-SWP/BK	Knuckle Mount (Black)
P10007	MT-SF-SWP/BK	Slip Fitter Mount (Black)
P10019	MT-SB-SWP/WH	Swivel Bracket Mount (White)
P10020	MT-KNC-SWP/WH	Knuckle Mount (White)
P10021	MT-SF-SWP/WH	Slip Fitter Mount (White)
P10074	MT-SB-SWP/DB	Swivel Bracket Mount (Bronze)
P10075	MT-KNC-SWP/DB	Knuckle Mount (Bronze)
P10076	MT-SF-SWP/DB	Slip Fitter Mount (Bronze)
P10036	SEN-PHO-BT-MT/MV	Button Photocell (120-277V)



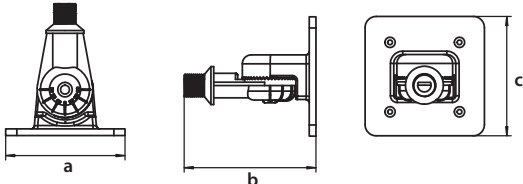

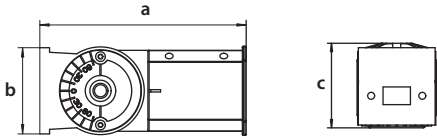

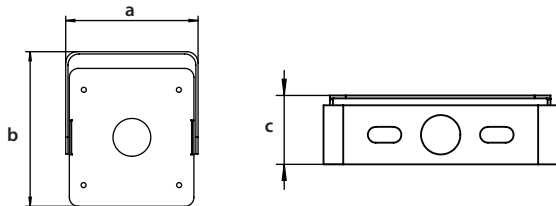
SEN-PHO-BT-MT/MV
Button Photocell
(120-277V)

► Dimensions

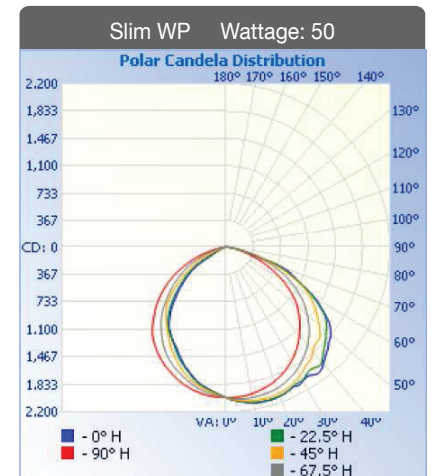
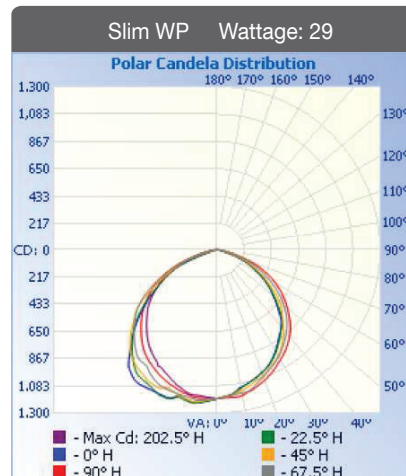
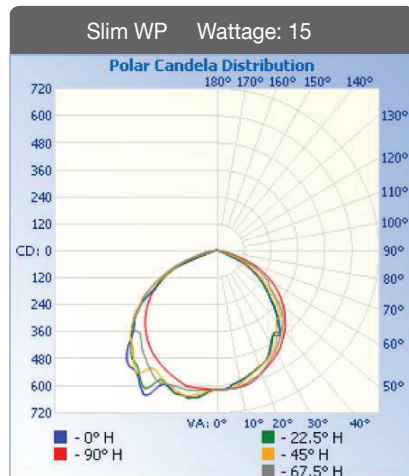
15W 29W 50W				A	B	C	D	E
				5.25-in	6.30-in	7.87-in	4.00-in*	4.75-in

* Applies to ADA (Americans with Disabilities Act) Standard

► Mounting Dimensions

 Knuckle mount				a	b	c
				4.21-in	4.65-in	4.21-in
 Slip Fitter				a	b	c
				7.04-in	2.95-in	3.25-in
 Swivel Bracket				a	b	c
				4.68-in	5.47-in	1.37-in

► Illuminance Distribution



Illuminance at a Distance

	Center Beam fc	Beam Width
3.0R	68.4 fc	7.4 ft 8.2 ft
6.0R	17.1 fc	14.9 ft 16.5 ft
9.0R	7.6 fc	22.3 ft 24.7 ft
12.0R	4.3 fc	29.7 ft 32.9 ft
15.0R	2.7 fc	37.2 ft 41.2 ft

■ Vert. Spread: 102.2°
■ Horiz. Spread: 107.8°

Illuminance at a Distance

	Center Beam fc	Beam Width
3.0R	131.8 fc	7.7 ft 9.2 ft
6.0R	33.0 fc	15.5 ft 18.3 ft
9.0R	14.6 fc	23.2 ft 27.5 ft
12.0R	8.2 fc	30.9 ft 36.7 ft
15.0R	5.3 fc	38.7 ft 45.9 ft

■ Vert. Spread: 104.4°
■ Horiz. Spread: 113.6°

Illuminance at a Distance

	Center Beam fc	Beam Width
3.0R	223.3 fc	8.2 ft 8.7 ft
6.0R	55.8 fc	16.4 ft 17.4 ft
9.0R	24.8 fc	24.6 ft 26.1 ft
12.0R	14.0 fc	32.8 ft 34.9 ft
15.0R	8.9 fc	41.0 ft 43.6 ft

■ Vert. Spread: 107.6°
■ Horiz. Spread: 110.9°

► Master Carton Package

