

Project	
Schedule	Date
Notes	
Catalog Number	

Filament LED

Product Description

LED Filament Lamps replicate the traditional design of incandescent filament bulbs while providing significant energy savings and efficiency over a much longer 25,000-hour lifetime. These lamps contain LED emitters arranged in a linear filament style rod. These emitters are powered by using a traditional glass insulated circuit similar to a traditional incandescent light bulb. The perfect replacement for your existing incandescent light bulbs, you could experience savings of up to 70%.

naturalLED® offers a full line in A19, G25, ST19, and Candelabra lamps that deliver warm light in 2200K. Designed for decorative residential, retail, hotel boutiques, hospitality and many more applications.



Features & Benefits

- ▶ Uniform light distribution and consistent color
- ▶ Omni-directional light source
- ▶ LED with a traditional incandescent design
- ▶ Retrofit incandescent lamps

Specifications

- ▶ Input line voltage: 120
- ▶ Powerfactor >0.9
- ▶ Dimmable
- ▶ Operating temperature: -4°F ~ 104°F
- ▶ Finish: Glass

Applications

- ▶ Residential Lighting
- ▶ Decoration Lighting
- ▶ Retail Lighting
- ▶ Hotel Lighting




Ordering Information

Code	Description	CCT	Watt	Lumen	Equiv Wattage	Base	CRI	Shape	Dim	Rated Hrs	
5940	LED4.5CAF/FIL/30L/E12/922	2200K	4.5	300	40	E12	>90	Candle	Yes	15,000	•
5941	LED5CAF/FIL/32L/E26/922	2200K	5	325	40	E26	>90	Candle	Yes	15,000	•
5942	LED5G25/FIL/35L/922	2200K	5	350	40	E26	>90	G25	Yes	15,000	•
5994	LED6.5A19/FIL/45L/922	2200K	6.5	450	40	E26	>90	A19	Yes	15,000	•
5995	LED6.5ST19/FIL/45L/922	2200K	6.5	450	40	E26	>90	ST19	Yes	15,000	•

Photometric Data

4.5CAF- E12

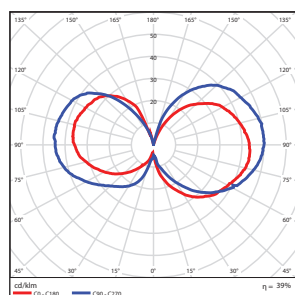


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	8.89	1.10
0-40	19.55	2.50
0-60	56.73	7.20
60-80	58.43	7.40
70-80	31.66	4.00
90-120	98.29	12.40
90-180	159.97	20.20
0-180	309.86	39.10

Total Luminaire Efficiency = 100.00%

5CAF-E26




Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	10.67	2.90
0-40	23.72	6.30
0-60	72.36	19.40
60-80	77.80	20.80
70-80	41.94	11.20
90-120	122.55	32.80
90-180	171.37	45.90
0-180	366.54	98.10

Total Luminaire Efficiency = 100.00%

5G25




Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	10.67	2.90
0-40	23.72	6.30
0-60	72.36	19.40
60-80	77.80	20.80
70-80	41.94	11.20
90-120	122.55	32.80
90-180	171.37	45.90
0-180	366.54	98.10

Total Luminaire Efficiency = 100.00%

6.5A19




Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	22.81	4.80
0-40	46.17	9.60
0-60	117.09	24.40
60-80	97.57	20.30
70-80	51.31	10.70
90-120	142.70	29.70
90-180	214.26	44.60
0-180	482.07	100.40

Total Luminaire Efficiency = 100.00%

ST19



Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	22.81	4.80
0-40	46.17	9.60
0-60	117.09	24.40
60-80	97.57	20.30
70-80	51.31	10.70
90-120	142.70	29.70
90-180	214.26	44.60
0-180	482.07	100.40

Total Luminaire Efficiency = 100.00%

Product Dimensions


Candle E12

Weight: 1.57-oz

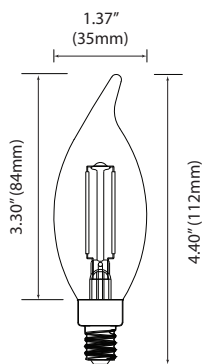


Candle E26

Weight: 1.90-oz

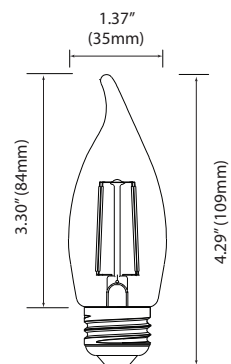


G25

Weight: 4.66-oz

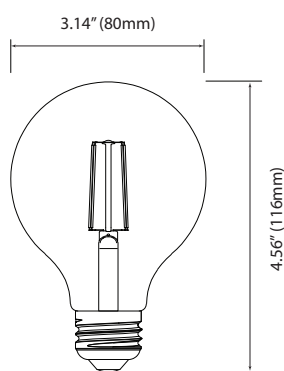


A19

Weight: 4.22-oz

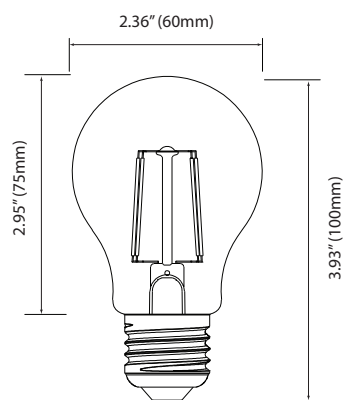

T19

Weight: 4.30-oz

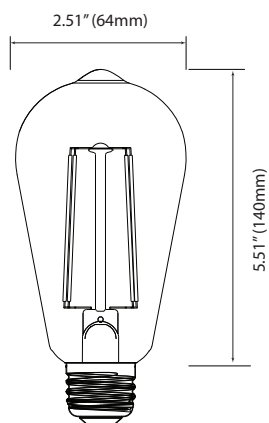

Package

