

Project	
Schedule	Date
Notes	
Catalog Number	

Shop Light

Product Description

naturalLED® shop light provide energy-saving, maintenance-free that are DLC and UL Damp Qualified. Our shop light provides uniform light distributions and consistent colors; available in 4000K and 5000K. These shop lights are easy to install, durable, and lightweight. Perfect for garages, workshops, basements, utility rooms, and more.



Features & Benefits

- ▶ DLC Qualified
- ▶ UL Damp
- ▶ Uniform light distribution and consistent color
- ▶ Easy Installation
- ▶ UV coated acrylic
- ▶ 3.5 ft power cord included

Specifications

- ▶ Input line voltage: 120-277V
- ▶ Powerfactor >0.9
- ▶ Operating temperature: -22°F ~ 122°F
- ▶ Aluminum housing and acrylic

Applications

- ▶ Workshops
- ▶ Garages
- ▶ Basements
- ▶ Utility Rooms




Ordering Information

Code	Description	CCT	Watt	Lumen	Equiv Wattage	Size	Beam Angle	Voltage	Rated Hrs	DAMP LOCATION	DLC
7593	LED-FXUSL40/48FR/840/MV	4000K	40	4,387	Replaces 2-4 FL T8	2.5' x 4'	Flood	120-277	50,000	•	•
7594	LED-FXUSL40/48FR/850/MV	5000k	40	4,518		2.5' x 4'	Flood	120-277	50,000	•	•

Photometric Data

40 Watt

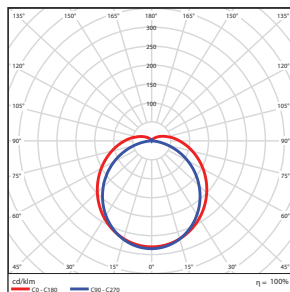

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	607.39	21.80
0-40	997.09	35.70
0-60	1794.97	64.40
60-80	574.00	20.60
70-80	246.67	8.80
90-120	207.92	7.50
90-180	254.33	9.10
0-180	2789.12	100.00

Total Luminaire Efficiency = 100.00%


Illuminance at a Distance			
	Center Beam fc	Beam Width	
5.0ft	31.3 fc	21.2 ft	13.8 ft
10.0ft	7.82 fc	42.4 ft	27.7 ft
15.0ft	3.48 fc	63.6 ft	41.5 ft
20.0ft	1.96 fc	84.8 ft	55.3 ft
25.0ft	1.25 fc	106.0 ft	69.1 ft
30.0ft	0.87 fc	127.2 ft	83.0 ft

■ Vert. Spread: 129.5°
 ■ Horiz. Spread: 108.3°

Product Dimensions

12-inch

Weight: XX-lbs

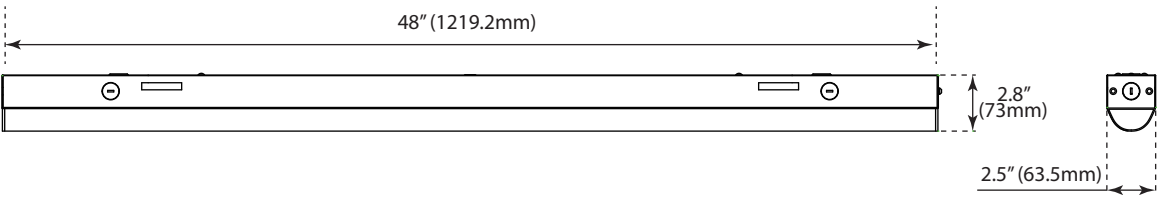

Package

