

Beyond LED

Wall or Ceiling Mounted • Damp Location Listed **PROGRESS LED**

Description:

Beyond Collection One-Light 12" LED Round Ceiling/Wall Mount

Specifications:

- White Acrylic Diffuser
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" recessed outlet box: 7.625 in W., 0.875 in ht., 7.625 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied

Performance:

| | |
|------------------------|-------------------------------------|
| Number of Modules | 1 |
| Input Power | 17 W |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Lumens/LPW (Source) | 1,211/71.2 (LM-82) |
| Lumens/LPW (Delivered) | 814.3/47.9 (LM-79) |
| CCT | 3000 K |
| CRI | 90 CRI |
| Life (hours) | 60000 (L70/TM-21) |
| EMI/RFI | Meets FCC Title 47, Part 15 Class B |
| Max. Operating Temp | 30 °C |
| Warranty | 5-year Limited Warranty |
| Labels | cCSAus Damp Location Listed |


P2308-0930K9



Dimensions:

Width: 12 in
Height: 12 in
Depth: 2-7/8 in
H/CTR: 6 in

White Acrylic Diffuser
Width: 12 in
Height: 12 in

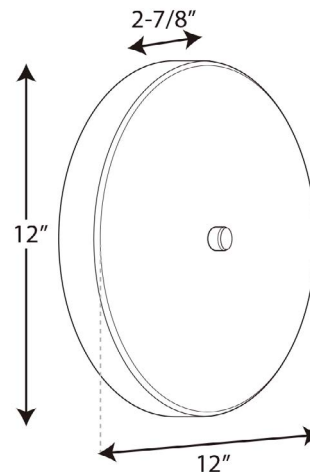

P2308-0930K9

Dimming Notes:

P2308-0930K9 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Nova T NTELV-300

Lutron_Vierti VTELV-600

Lutron_Maestro MAELV-600

Lutron_spacer/system SPSELV-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.