

Elevate

Flush-Mount Mounted • Damp Location Listed **PROGRESS LED**

Description:

Elevate Collection 13" LED Flush Mount

Specifications:

- White Glass Bowl
- Dimmable to 10% brightness (See Dimming Notes)
- Fixture covers a standard 4" recessed outlet box: 13 in W., 1.625 in ht., 13 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied

Performance:

Number of Modules	1
Input Power	17 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1,452/83 (LM-82)
Lumens/LPW (Delivered)	670/38.3 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Max. Operating Temp	30°C
Warranty	5-year Limited Warranty
Labels	cCSAus Damp Location Listed
	Meets California Title 24 JA8-2016

P350105-015-30



Dimensions:

Diameter: 13 in
Height: 5-1/4 in

White Glass Bowl
Width: 12-1/4 in
Height: 4-3/8 in



Photometrics:


ELECTRICAL DATA

P350105-015-30

Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Power Factor	Greater than 0.90
THD	<20%
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P350105-015-30

LED Light Engine: 3000 K 90 CRI
System Wattage: 17
Fixture delivered lumens: 670
Fixture Efficacy: 38.3
Spacing Criteria: 1.3

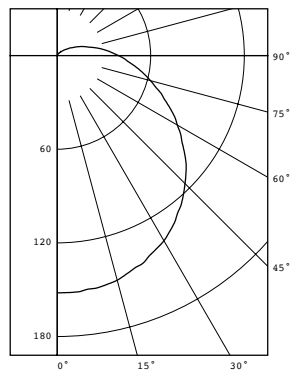

Test 17.02285 Test Date 8/24/17

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	152	
5	152	14
15	149	42
25	141	65
35	131	82
45	116	90
55	98	88
65	80	79
75	62	66
85	46	51
90	40	
95	33	36
105	21	23
115	13	13
125	7	6
135	3	3
145	1	1
155	0	0
165	0	0
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	122	18.5
0-40	204	30.9
0-60	381	57.9
0-90	577	87.6
90-120	72	10.9
90-130	78	11.9
90-150	82	12.4
90-180	82	12.4
0-180	659	100.0

P350105-015-30

Dimming Notes:

P350105-015-30 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Diva DVELV-300P
Lutron_Nova T NTELV-300
Lutron_Caseta
Lutron_Ariadni AY-600P
Leviton_Illumatech IPI06-1LZ
Lutron_Lumea LG-603PG
Leviton_SureSlide 6672
Leviton_SureSlide 6674
Lutron_Skylark Contour CTCL-153P
Lutron_Diva DVCL-153P
Pass & Seymour_Harmony DCL453PTCCCV6
Lutron_Toggler TGCL-153P
Lutron_Maestro MACL-153M
Lutron_Ariadni AYLV-600P
Lutron_Maestro MA-600
Lutron_Nova T NTLV-600
Lutron_Maestro MAELV-600
Lutron_spacer/system SPSELV-600
Leviton_Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.