

RADIONIC INDUSTRIES, INC.

Customer Part #:	
Vendor:	RADIONIC
R.I. Catalog #:	PI068
Start method:	PREHEAT
Connection type:	LEADS
Input voltage:	120VAC
Frequency:	60Hz

Production Specifications:

Froduction Specifications.										
Lamp	LPS	Rated	Min. Start	B.F.	Input (w)	B.E.F.	Input Current	Power	LCCF	% THD
Class	#	Lamp (W)	Temp (F)	%	ANSI		(RATED)	Factor		
F4T5	1	4	50	95	7	13.5	0.16A	>0.50	<1.52	<15
F6T5	1	6	50	90	9	10.0	0.16A	>0.50	<1.53	<15
F8T5	1	8	50	85	11	7.7	0.16A	>0.50	<1.51	<20

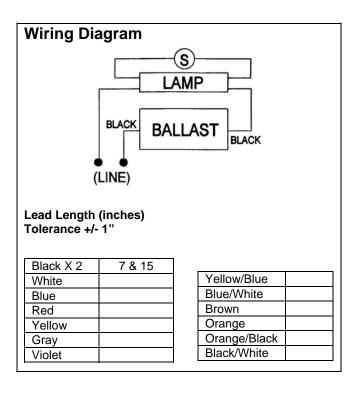

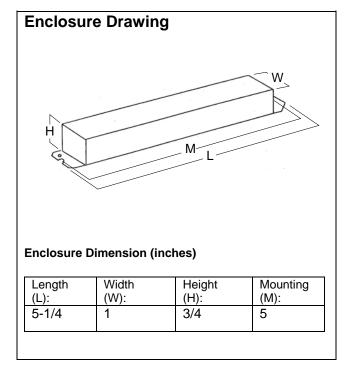

Safety	UL	CSA	CE	CUL	Other
		LISTED		619L	

These are test results under laboratory conditions and are supplied without charge at your request. We do not guarantee the accuracy of these results, nor do we represent or warranty products to achieve these same results under field conditions. We recommend you repeat these tests before purchasing. See our complete warranty for details. msw\rc\balspec-06/23/03