


PROJECT: _____
 CATALOG #: _____
 FIXTURE TYPE: _____
 NOTES: _____

ALC Area Light Contractor Series Gen 1

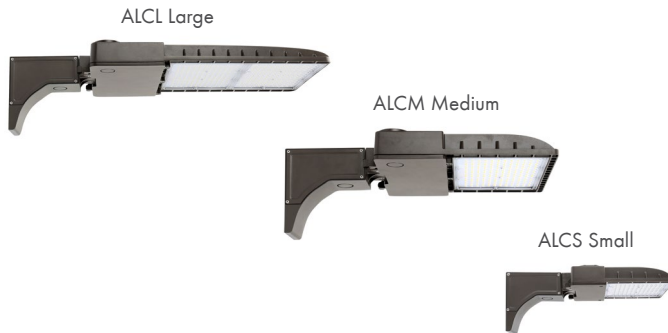

Images are shown for illustration purpose only.

The **ALC Area Light Contractor Series Gen 1** comes in three sizes small, medium, and large with a lumen output between 9,000 to 39,300 lumens. This versatile luminaire designed for contractors has different mounting options, photocell, and motion sensors for efficiency and greater energy savings.

APPLICATIONS

Auto Dealerships, Parking Lots, Walkways, Roadways, and other Public Areas, etc.

REPLACEMENT

ALCS: 175W- 250W MH, ALCM: 400W MH,
 ALCL: 750W-1000W MH+

MOUNTING & OPTIONS



PERFORMANCE INFORMATION

SERIES NUMBER	WATT	LUMENS	DIST	CCT
ALCS 60 T3 G1 5K	40W	5,500	Type III	5000K
ALCS 96 T3 G1 5K	70W	9,500	Type III	5000K
ALCS 140 T3 G1 5K	100W	13,400	Type III	5000K
ALCM 210 T3 G1 5K	150W	20,100	Type III	5000K
ALCM 260 T3 G1 5K	200W	25,000	Type III	5000K
ALCL 350 T3 G1 5K	250W	34,000	Type III	5000K
ALCL 410 T3 G1 5K	300W	40,200	Type III	5000K

ORDERING GUIDE				EXAMPLE: ALCS 60 T3 G3 5K					
Luminaire Type	Size	Lumen Output	Dist. Type	Generation	Voltage	CCT	Finish	Mount	Options
ALC Area Light Contractor	S= Small	60 5,500 Lumens 96 9,500 Lumens 140** 13,400 Lumens	T3= Type III T4= Type IV T5= Type V	G1	BLANK= 120-277V HVU= 347-480V	4K 4000K 5K 5000K	BLANK= Dark Bronze C*= Custom	ALC-SPAR= Square and Round Pole Mount ALC-WM= Wall Mount ALC-SFD= Slipfitter Mount ALC-T= Trunnion Mount	PC-1= Twist-lock Photocell (120-277V) PC-2= Twist-lock Photocell (347-480V) MS-FSP-212= Motion Sensor (Choose 1) L3= 40' diameter lens L7= 100' diameter lens
	M= Medium	210 20,100 Lumens 260 25,000 Lumens							
	L= Large	350 34,000 Lumens 410 40,200 Lumens							

*For a custom color, please call to place your order

**Standard 120-277V only

Due to continuous product improvements, specification and/or equipment updates may change without notice.

SPECIFICATIONS

HOUSING

Precision die-cast aluminum housings with integral heat-sink fins. Parting lines dressed for high quality finish.

AMBIENT TEMPERATURE

Suitable for use in -40°C to +45°C (-40°F to 113°F)

MOUNTING

Mounting options include Square and Round Pole Mount, Wall Mount, Adjustable Slipfitter Mount and option with photocell, and Trunnion Mount

EFFICACY

Up to 139 lumen's per watt (see individual wattage data)

CCT AND CRI

4000K and 5000K CCT available; 70CRI

OPTICS

Precision molded secondary optics produce superior uniformity, minimal light trespass and maximum pole spacing.

WARRANTY

5-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

ELECTRICAL

Standard 120-277V. Optional HVU 347V/480V. 50/60Hz with open/short circuit protection. 10K Surge protector per ANSI/IEEE C62.41.2. Optional NEMA twist-lock photocell control.

ENERGY DATA

Constant current driver efficiency above 90%.

FINISH

Polyester Powder Dark Bronze finish. Custom colors available. Multiple stage process to produce 3 mil thickness for superior corrosion resistance and maximum durability.

CERTIFICATIONS

UL Listed for wet locations. Equivalent to IP65 rating. FCC compliant. RoHs compliant. IDA dark-sky compliance. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.slgus.com/DLC to confirm which versions are qualified.

MOUNTING & OPTIONS



ALC-SPAR



ALC-WM



ALC-SFD



ALC-T



PC-1



PC-2

Due to continuous product improvements, specification and/or equipment updates may change without notice.

OPTIONS



MS-FSP-212
Dimmable Motion Sensor



MS-FSP-L3/L7
Lens

The **MS-FSP-212** provides multi-level control base on motion and daylight level. Requires L3 or L7 lens depending the mounting height.

Operation Voltage	Shape	Adjustable Time Delay	Fade Down Time	Operating Temperature	Mounting Height For MS-FSP-L3	Mounting Height For MS-FSP-L7
120/277V	Cone	30 sec - 30 min	0-10 sec	-40°F to 158°F	20 ft*	40 ft**

*Covers a 40 ft diameter when mounting height is 20 ft. Coverage is equal to 2x the height.


**Covers a 100 ft diameter when mounting height is 40 ft. Coverage is equal to 2.5x the height

PHOTOMETRIC

Type III

Type III optics produce an asymmetrical pattern that directs the majority of the light forward and equally on both sides of the luminaire. In a back-to-back configuration, it creates a rectangular pattern which can extend pole spacings.


ALCM 210 T3 G1 5K

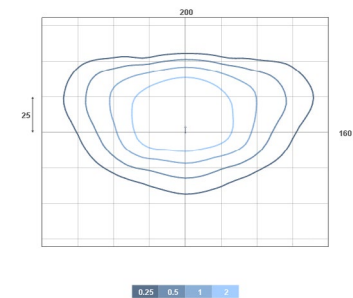

Type IV

Type IV is suitable for applications where light is primarily required forward with minimal back light. Typical installations include perimeter poles.


ALCM 210 T4 G1 5K

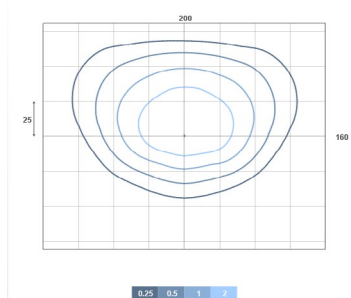

Type V

Type V optics produce a symmetrical square distribution pattern that distributes light equally on all sides of the luminaire. Type V luminaires is universal for most area lighting applications.

ALCM 210 T5 G1 5K

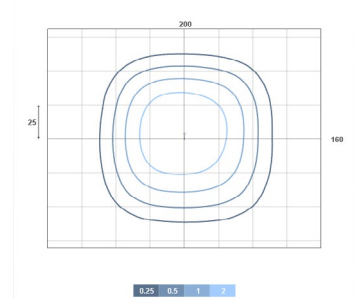


Mounting Height	15	20	25	30	35
Multiplier	2.8	1.6	1.0	0.7	0.5


Due to continuous product improvements, specification and/or equipment updates may change without notice.

DIMENSIONS


SMALL
40W, 70W, 100W
Wall Mount

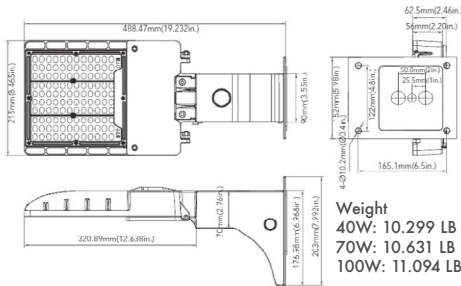


SMALL
40W, 70W, 100W
Slipfitter Mount

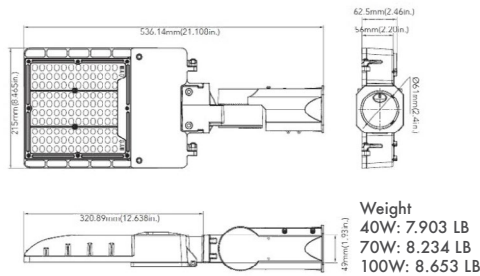


LARGE
40W, 70W, 100W
Pole Mount

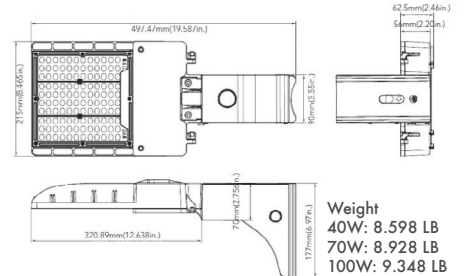


MEDIUM
150W & 200W
Wall Mount

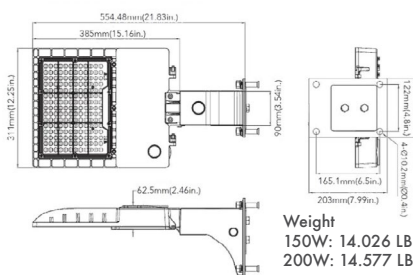


MEDIUM
150W & 200W
Slipfitter Mount

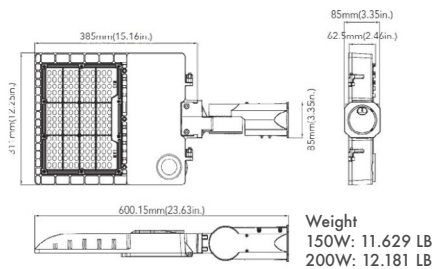


MEDIUM
150W & 200W
Pole Mount

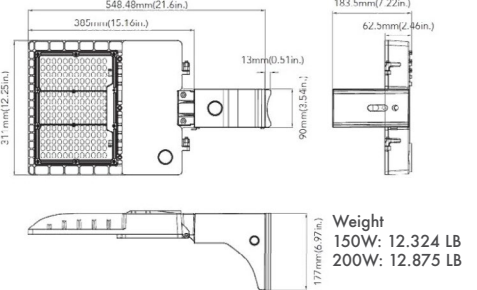


LARGE
250W & 300W
Wall Mount

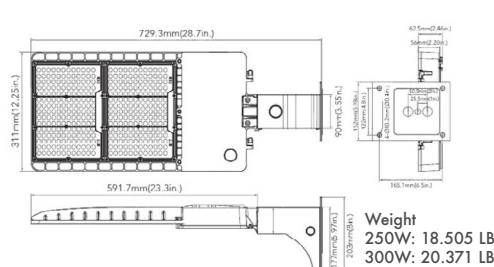

LARGE
250W & 300W
Slipfitter Mount

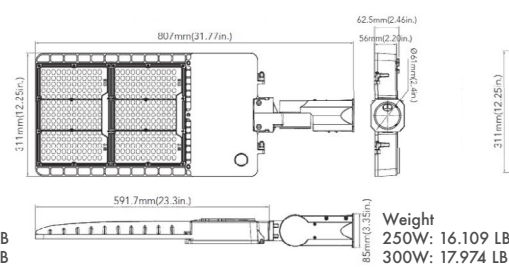


LARGE
250W & 300W
Pole Mount

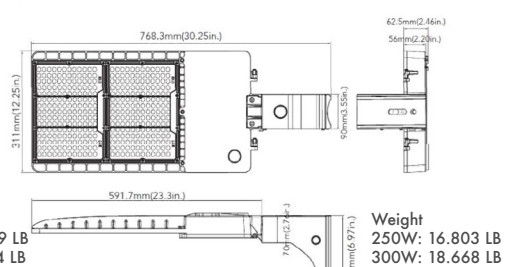


Due to continuous product improvements, specification and/or equipment updates may change without notice.

MOUNTING DIMENSIONS

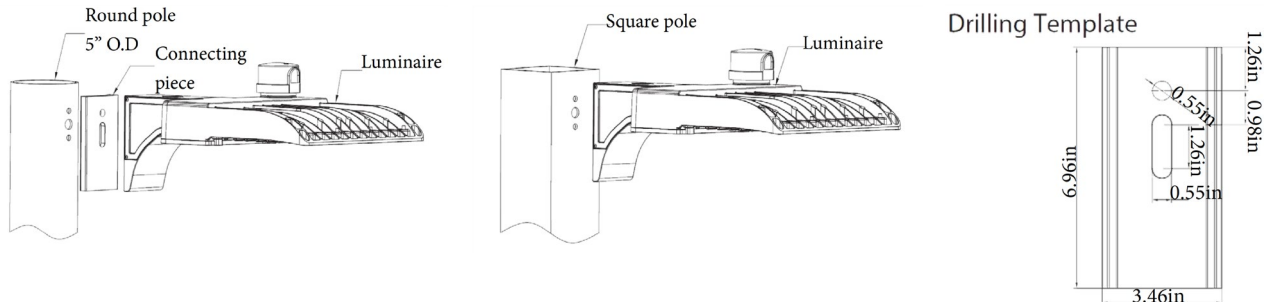

EPA OF AREA LIGHT

									
S	ALCS 60	40W							
	ALCS 96	70W	0.3413	0.5929	0.7983	0.6826	1.0239	1.0499	1.0239
	ALCS 140	100W							
M	ALCM 210	150W	0.423	0.735	0.873	0.846	1.158	1.185	1.158
	ALCM 260	200W							
L	ALCL 350	250W	0.4759	0.7889	1.0581	0.9518	1.2648	1.3711	1.2648
	ALCL 410	300W							

PERFORMANCE COMPARISON

Product Series	Watt	Lumen	Efficacy	Replaces	Voltage	Max Mounting Height	DLC
ALCS 60 T3 G1 5K	40W	5,500 Lm	137 Lm/W	100W	120-277V	10-15 ft	Premium
ALCS 96 T3 G1 5K	70W	9,500 Lm	136 Lm/W	175W	120-277V	15-20 ft	Premium
ALCS 140 T3 G1 5K	100W	13,400 Lm	134 Lm/W	250W	120-277V	15-20 ft	Premium
ALCM 210 T3 G1 5K	150W	20,100 Lm	134 Lm/W	400W	120-277V	20-30 ft	Premium
ALCM 260 T3 G1 5K	200W	25,000 Lm	125 Lm/W	400W	120-277V	20-30 ft	Premium
ALCL 350 T3 G1 5K	250W	34,000 Lm	136 Lm/W	750W	120-277V	30-50 ft	Premium
ALCL 410 T3 G1 5K	300W	40,200 Lm	134 Lm/W	1000W	120-277V	30-50 ft	Premium

Due to continuous product improvements, specification and/or equipment updates may change without notice.

ELECTRICAL LOAD

			Current (A)					
	Series Number	Wattage	120V	208V	240V	277V	347V	480V
ALCS	ALCS 60 T3 G1 5K	40W	0.33	0.19	0.16	0.14	N/A	N/A
	ALCS 96 T3 G1 5K	70W	0.58	0.34	0.30	0.25	N/A	N/A
	ALCS 140 T3 G1 5K	100W	0.83	0.48	0.41	0.36	N/A	N/A
ALCM	ALCM 210 T3 G1 5K	150W	1.25	0.72	0.63	0.54	0.43	0.31
	ALCM 260 T3 G1 5K	200W	1.66	0.96	0.83	0.72	0.58	0.42
ALCL	ALCL 350 T3 G1 5K	250W	2.08	1.20	1.04	0.90	0.72	0.52
	ALCL 410 T3 G1 5K	300W	2.50	1.44	1.25	1.08	0.87	0.62

PROJECTED LUMINAIRE MAINTENANCE

OPERATING HOURS					
Ambient Temperature	0	25,000	50,000	100,000	Calculated L70 (Hours)
25°C / 77°F	1	0.95	0.91	0.81	>214,973

Lumien Ambient Temperature (LAT) Multipliers

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	0.98
40°C	104°F	0.98

Due to continuous product improvements, specification and/or equipment updates may change without notice.

Series Number	Wattage	Lumen (Lm)	Distribution Type	B	U	G
ALCS 60 T3 G1 4K	40W	5,470	Type III	1	0	1
ALCS 60 T4 G1 4K		5,417	Type IV	1	0	1
ALCS 60 T5 G1 4K		5,600	Type V	3	0	1
ALCS 96 T3 G1 4K	70W	9,500	Type III	2	0	2
ALCS 96 T4 G1 4K		9,310	Type IV	2	0	2
ALCS 96 T5 G1 4K		9,730	Type V	3	0	1
ALCS 140 T3 G1 4K	100W	13,500	Type III	2	0	2
ALCS 140 T4 G1 4K		13,200	Type IV	2	0	2
ALCS 140 T5 G1 4K		13,800	Type V	3	0	2
ALCM 210 T3 G1 4K	150W	20,500	Type III	3	0	3
ALCM 210 T4 G1 4K		19,800	Type IV	3	0	3
ALCM 210 T5 G1 4K		20,500	Type V	4	0	2
ALCM 260 T3 G1 4K	200W	25,150	Type III	3	0	3
ALCM 260 T4 G1 4K		24,633	Type IV	3	0	3
ALCM 260 T5 G1 4K		25,500	Type V	4	0	2
ALCL 350 T3 G1 4K	250W	34,000	Type III	4	0	4
ALCL 350 T4 G1 4K		33,250	Type IV	4	0	4
ALCL 350 T5 G1 4K		34,750	Type V	5	0	3
ALCL 410 T3 G1 4K	300W	40,033	Type III	4	0	4
ALCL 410 T4 G1 4K		39,600	Type IV	4	0	4
ALCL 410 T5 G1 4K		40,500	Type V	5	0	3

Due to continuous product improvements, specification and/or equipment updates may change without notice.