

PROJECT: _____
 CATALOG #: _____
 FIXTURE TYPE: _____
 NOTES: _____

HCL Compact Linear High Bay

HCL 120 / 140 / 180
 90W / 100W / 130W



HCL 240 / 300
 180W / 210W



HCL 360
 260W



HCL 500 / 600
 360W / 420W



Images are shown for illustration purposes only.

The **HCL Compact Linear High Bay** gives full performance in half the size. This compact high bay weighs less than the competition and lasts twice as long, while providing the same high lumen output as a full-sized linear high bay. The small but sturdy HCL offers superior thermal performance and glare control. Eco-friendly contractor packaging makes installation even faster while reducing packaging waste and labor. Coming in lumen packages ranging from 12,200 to 60,500 lumens, the HCL is suitable for several commercial, retail, and institutional applications.



APPLICATIONS

Commercial, Retail, and Institutional applications including Gymnasiums, Factories, and Warehouses.



SPECIFICATIONS

CONSTRUCTION

Die-cast aluminum.

AMBIENT TEMPERATURE

Suitable for use in -40°C to 55°C (-40°F to 131°F).

LIFESPAN

70% lumen maintenance at > 100,000 hours.

MOUNTING

Standard chain mounting (accessories included). Optional pendant or surface mounting available.

LUMEN OUTPUT

Lumen packages ranging from 12,200 to 60,500 lumens.

CCT AND CRI

4000K and 5000K CCT available; 80CRI.

OPTICS

Glare reducing acrylic lens.

WARRANTY

10-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

ELECTRICAL

Standard 120-277V. Optional HVU 347V/480V. Standard 0-10V Dimming. Class II Driver 50/60Hz with open/short circuit protection. Optional surge protection.

FINISH

White finish.

CERTIFICATIONS

UL Listed for damp locations. FCC compliant. RoHS compliant. Design Lights Consortium® (DLC) Premium 5.1 qualified product. Not all versions of this product may be DLC qualified. Please visit www.slgus.com to confirm which versions are qualified.

Due to continuous product improvements, specification and/or equipment updates may change without notice.

PRODUCT ORDERING GUIDE

EXAMPLE: HCL 120 G1 4K

Luminaire Type	Lumen Output	Optics	Generation	Voltage	CCT	Finish
HCL Compact Linear High Bay	120 12,200 Lumens/90 Watts 140 14,000 Lumens/100 Watts 180 18,200 Lumens/130 Watts 240 24,300 Lumens/180 Watts 300 30,600 Lumens/210 Watts 360 36,400 Lumens/260 Watts 500 49,600 Lumens/360 Watts 600 60,500 Lumens/420 Watts	BLANK Glare Control Acrylic Lens, Medium Beam	G1	BLANK 120-277V HVU 347-480V	4K 4000K 5K 5000K	BLANK White

SENSORS OR WIRELESS CONTROL (Choose 1)

Individual Control Suitable for 120-277V	Individual Control Suitable for 347-480V	Advanced Wireless Control
BLANK No Motion Sensor MS-BRI619 Low Voltage PIR Fixture Integrated Motion Sensor MS-FSP-211 Remote Configurable Dimming Sensor (Choose 1 Lens) L3 L3 Lens (Max. 20 ft mounting height) L7 L7 Lens (Max. 40 ft mounting height)	BLANK No Motion Sensor MS-FSP-221B Standard Dimming Sensor (Choose 1 Lens) L3 L3 Lens (Max. 20 ft mounting height) L7 L7 Lens (Max. 40 ft mounting height)	BLANK No Wireless Control AVI-LVFA-1CH-12-24VDC Bluetooth Controller AVI-LVFA-1CH-12-24VDC-PIR Bluetooth Controller with Occupancy and Daylight Sensor
WIRELESS COMMISSIONING TOOL (for MS-FSP-211 and MS-FSP-221B)		
MS-FSIR-100 Wireless commissioning tool for MS-FSP-211 and MS-FSP-221B		

PRODUCT OPTIONS

Emergency Backup	Surge Protector	Cord Sets
BLANK No Emergency Backup EL UNV-8W-LH-B1 8W Emergency Battery Kit, Compatible with HCL 180 EL UNV-8W-LH-B2 8W Emergency Battery Kit, Compatible with HCL 120 / 140 / 240 / 300	BLANK No Surge Protection SPD-277 5KA/10KV Surge Protection device, single phase protection with 120-277V input SPD-480 10KA/20KV Surge Protection device, single phase protection with 277-480V input	BLANK Standard 5 ft Aircraft Cable (1.5 ft Black/White/Green Conductors) CS1 6 ft Power Cord, Straight Cord, 18 Gauge, 3 Conductors, Black CS2 6 ft Power Cord, Twist-lock Plug Type, 3 Conductors, Black CS3 6 ft Power Cord, 12 Gauge, 3 Conductors, MC Solid Cable, No Plug CS4 6 ft Power Cord, 16 Gauge, 3 Conductors, SO Black Cord, No Plug CS5 6 ft Power Cord, 18 Gauge, 5 Conductors, Black Cord, No Plug


ACCESSORIES (Shipped separately. Requires some field assembly.)

Mounting	Wire Guards
HCL-SMB Surface Mount Bracket (2pcs included) HCL-PMB Pendant Mount Box for HCL 120 / 140 / 180 / 240 / 300 HB-JBW Pendant Mount JBox for HCL 360 / 500 / 600	WG-HCL11 Wire Guard for 1' x 1' for HCL 120 / 140 / 180 WG-HCL12A Wire Guard for 1' x 2' for HCL 240 / 300 WG-HCL12B Wire Guard for 1' x 2' for HCL 360 WG-HCL14 Wire Guard for 1' x 4' for HCL 500 / 600


Due to continuous product improvements, specification and/or equipment updates may change without notice.

DIMENSIONS


HCL 120 / 140 / 180

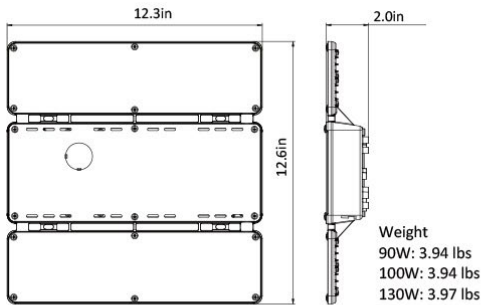


HCL 240 / 300

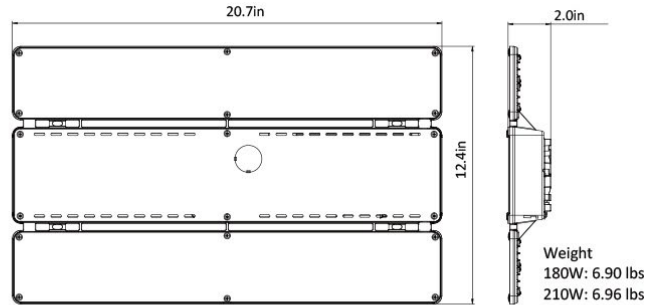


HCL 360

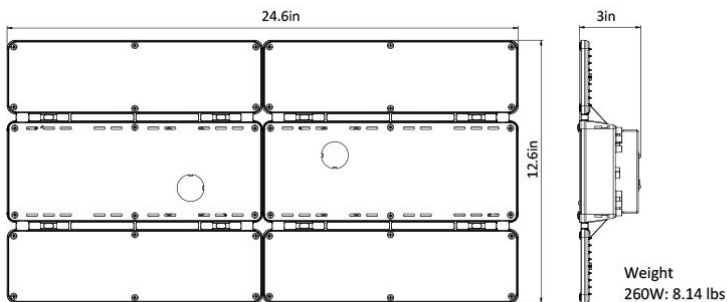


HCL 500 / 600

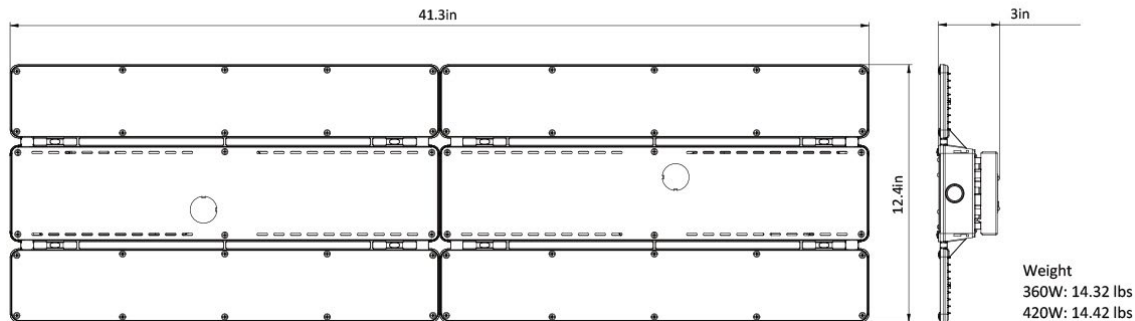


MOUNTING

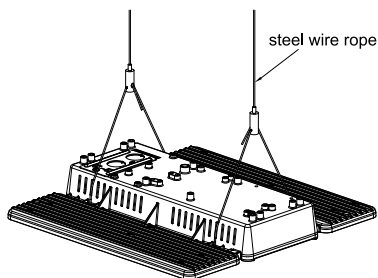

Suspended Mounting

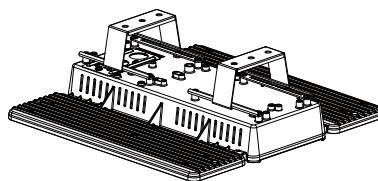

Surface Mounting

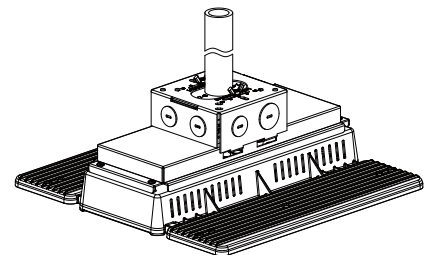

Pendant Mounting

Due to continuous product improvements, specification and/or equipment updates may change without notice.

Remote Configurable Dimming Sensor (120V-277V) Optional Wireless Commissioning Tool



MS-FSP-211
Remote Configurable Dimmable Sensor



MS-FSP-L3/L7
Lens



MS-FSIR-100
Wireless Commissioning Tool for
MS-FSP-211 / MS-FSP-221B

The **MS-FSP-211** provides multi-level control based on motion and daylight level.
IP66 rated when mounted inside the fixture. Requires L3 or L7 lens depending on the mounting height.

Operation Voltage	Shape	Adjustable Time Delay	Fade Down Time	Operating Temperature	Mounting Height For MS-FSP-L3	Mounting Height For MS-FSP-L7
120/277VAC 230-240VAC (single phase); 50/60Hz	Cone	30 sec/5-30 min Default 1 hr	None, Disable, 1-60 sec; Default disabled	-40°F to 167°F (-40°C to 75°C)	Max 20 ft*	Max 40 ft**

*Covers a 40 ft diameter when mounting height is 20 ft. Coverage is equal to 2x the height.

**Covers a 100 ft diameter when mounting height is 40 ft. Coverage is equal to 2.5x the height.

Remote Configurable Dimming Sensor (Compatible with 347-480V Fixtures) Optional Wireless Commissioning Tool



MS-FSP-211B
Dimmable Motion Sensor



MS-FSP-L3/L7
Lens



MS-FSIR-100
Wireless Commissioning Tool for
MS-FSP-211 / MS-FSP-221B

The **MS-FSP-211B** provides multi-level control based on motion and daylight level.
IP66 rated when mounted inside the fixture. Requires L3 or L7 lens depending on the mounting height.

Operation Voltage	Shape	Adjustable Time Delay	Fade Down Time	Operating Temperature	Mounting Height For MS-FSP-L3	Mounting Height For MS-FSP-L7
Single Phase 100-347VAC Phase to Phase 208/230/480VAC	Cone	30 sec/1-30 min Default 5 min	0-60 sec	-40°F to 167°F (-40°C to 75°C)	Max 20 ft*	Max 40 ft**

*Covers a 40 ft diameter when mounting height is 20 ft. Coverage is equal to 2x the height.


**Covers a 100 ft diameter when mounting height is 40 ft. Coverage is equal to 2.5x the height.

Due to continuous product improvements, specification and/or equipment updates may change without notice.

ELECTRICAL LOAD

	Current (A)					
Wattage	120V	208V	240V	277V	347V	480V
90W	0.75	0.43	0.38	0.32	0.26	0.19
100W	0.83	0.48	0.42	0.36	0.29	0.21
130W	1.08	0.63	0.54	0.47	0.37	0.27
180W	1.50	0.87	0.75	0.65	0.52	0.38
210W	1.75	1.01	0.88	0.76	0.61	0.44
260W	2.17	1.25	1.08	0.94	0.75	0.54
360W	3.00	1.74	1.50	1.30	1.04	0.75
420W	3.50	2.02	1.75	1.52	1.21	0.88

PHOTOMETRIC

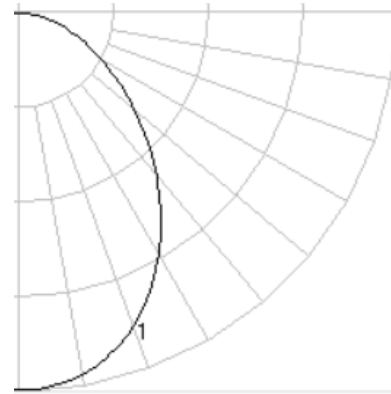

Beam Angle: 88°
Spacing Criterion: 1.08

PERFORMANCE COMPARISON

Wattage	Voltage	4000K CCT		5000K CCT		Replacement
		Lumen	Efficacy	Lumen	Efficacy	
90W	120-277	12,155	135	12,356	137	175W MH, 4-lamp T8 HBF, 2-lamp T5HO
	347-480	12,325	137	12,483	138	
100W	120-277	14,225	135	14,457	137	250W MH, 6-lamp T8 HBF, 4-lamp T5HO
	347-480	14,113	133	14,266	136	
130W	120-277	18,070	139	18,342	141	250W MH, 6-lamp T8 HBF, 4-lamp T5HO
	347-480	18,152	138	18,409	140	
180W	120-277	24,338	135	24,574	137	400W MH, 6-lamp T5HO
	347-480	24,372	136	24,601	137	
210W	120-277	29,870	143	30,360	144	750W MH, 8-lamp T5HO
	347-480	29,809	143	30,383	144	
260W	120-277	36,335	140	36,471	140	750W MH, 8-lamp T5HO
	347-480	36,044	138	36,567	140	
360W	120-277	49,209	135	50,115	137	1000W MH
	347-480	48,882	136	49,025	136	
420W	120-277	59,732	142	60,442	144	1000W MH
	347-480	59,963	143	60,638	145	

Due to continuous product improvements, specification and/or equipment updates may change without notice.