

Solais Lighting | LR38 VNSP LED Lamp

Solais LED PAR38 Lamp Replacement

Product Description: This Solais LED PAR38 Very Narrow Spot (VNSP) lamp replacement has the highest Center Beam Candle Power (**105,000 CBCP**) and narrowest beam spread of any replacement LED lamp on the market. With the light weight and full-dimming capabilities of halogen incandescent sources, it is the perfect solution for commercial, museum, retail and hospitality applications.

Performance Summary: Fully dimmable | Halogen PAR38 Aperture (**MOL: 5.61"**) | RoHS-compliant | Certified to UL Standard 1993 | Contains no lead or mercury | Dry location rating

Application: Designed for use in track and recessed fixtures (including IC rated housing)

Voltage: 120v Standard

CCT: 3000K

Dimmable: Yes - Visit solais.com/dimming.php for compatibility list

Life: 50,000 Hours (L70)

Base Type: E26

Weight (oz.): 9.6



Product Code	Power (Watts)	Beam Angle	CCT (K)	Lumen Output	CBCP (cd)	CRI
LR38/04/30K/400/BK	9.5	4°	3000	400	105000	83


Housing Color: Black (BK)

Ordering Information


Example: LR38/04/30K/400/BK

LR38	/	04	/	30K	/	400	/	BK
Form Factor (PAR38) LR38		Beam Angle 04		CCT 30K		Lumens 400		Housing BK - Black

Lamp Images

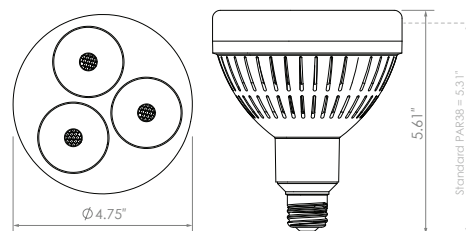

Beam Angles



4°

Color Temperature

3000K

Housing Colors

Black

*NOTE: This product has a MOL ≠ standard PAR38. Please verify fit prior to ordering.

Solais Lighting | LR38 VNSP LED Lamp



Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.



Thermal Throttle – In the event that Solais LEDs become overheated, they will dim themselves to protect your technology investments.

LIMITED WARRANTY: Solais Lighting warrants that our lamps and fixtures will operate for a period of five (5) years from the date of purchase or 25,000 hours, whichever comes first, when used in accordance with package and lamp directions. If your Solais product does not last for the warranty period, please send your name and address, the product you are returning, register receipts and proof of purchase to the address listed on our website. This limited warranty does not cover products subject to misuse, electrical current fluctuation, accident, neglect, or acts of God. THIS REPLACEMENT OR REPAIR IS THE SOLE WARRANTY OBLIGATION OF SOLAIS AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. LIABILITY FOR INCIDENTAL AND CONSEQUENTIAL DAMAGES EXCLUDED.

For complete warranty terms and conditions, please see: www.solais.com/warranty

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**