



TS SERIES INDUSTRIAL STRIP LUMINAIRE

SPECIFICATIONS

GENERAL DESCRIPTION

The SLG TS Industrial Strip Luminaire provides higher lumen output, greater energy efficiency, and reliable fixture performance in industrial and commercial environments.

HOUSING

Fabricated 22Ga Steel

MOUNTING

Suspended, surface mounted or pendant hung

AMBIENT TEMPERATURE

-40°F +104°F

-40°C +40°C

ENCLOSURE

Frosted acrylic lens

PERFORMANCE

80 CRI color rendering. Available CCT 4000K and 5000K.

FINISH

White polyester powder coat, 88% reflective. Painted after fabrication.

ELECTRICAL

High quality constant-current drivers, >90% efficient and rated for 50/60Hz operation, 120-277V input. 10K Surge protector per ANSI/IEEE C62.41.2. Dimming 0-10V standard

ENERGY DATA

Luminaire efficiencies of 85%

CERTIFICATIONS

UL Underwriters Laboratory listed for Damp locations. FCC compliant. RoHS compliant. DLC premium and DLC standard certified.

WARRANTY

10 year limited warranty.

Project:	
Catalog No.:	
Fixture Type:	
Notes:	



The SLG TS Industrial Strip Luminaire is an industry leading, innovative, energy saving product. The TS Luminaire is designed for one-for-one replacement of traditional four-foot and eight foot fluorescent strip lights. The low-profile, rugged construction, easy installation features including "paint after fabrication" make the TS strip light the right choice for illuminating warehouses, assembly lines, fabrication areas, as well as other interior spaces where energy savings is needed.

PERFORMANCE INFORMATION


SERIES NUMBER	INPUT WATTS	DELIVERED LUMENS	CCT
TS 4 29 G1 4K	23W	2,990 Lumens	4000K
TS 4 29 G1 5K	23W	3,013 Lumens	5000K
TS 4 46 G1 4K	35W	4,620 Lumens	4000K
TS 4 46 G1 5K	35W	4,690 Lumens	5000K
TS 8 59 G1 4K	46W	5,980 Lumens	4000K
TS 8 59 G1 5K	46W	6,026 Lumens	5000K
TS 8 85 G1 4K	65W	8,580 Lumens	4000K
TS 8 85 G1 5K	65W	8,645 Lumens	5000K
TS 8 97 G1 4K	75W	9,750 Lumens	4000K
TS 8 97 G1 5K	75W	9,825 Lumens	5000K
TS 4 40 G2 4K	30W	4,000 Lumens	4000K
TS 4 40 G2 5K	30W	4,050 Lumens	5000K
TS 4 60 G2 4K	45W	6,000 Lumens	4000K
TS 4 60 G2 5K	45W	6,050 Lumens	5000K
TS 8 80 G2 4K	60W	8,000 Lumens	4000K
TS 8 80 G2 5K	60W	8,000 Lumens	5000K
TS 8 100 G2 4K	80W	10,500 Lumens	4000K
TS 8 100 G2 5K	80W	10,550 Lumens	5000K



TS SERIES INDUSTRIAL STRIP LUMINAIRE

Project:	
Catalog No.:	
Fixture Type:	
Notes:	

DIMENSIONS

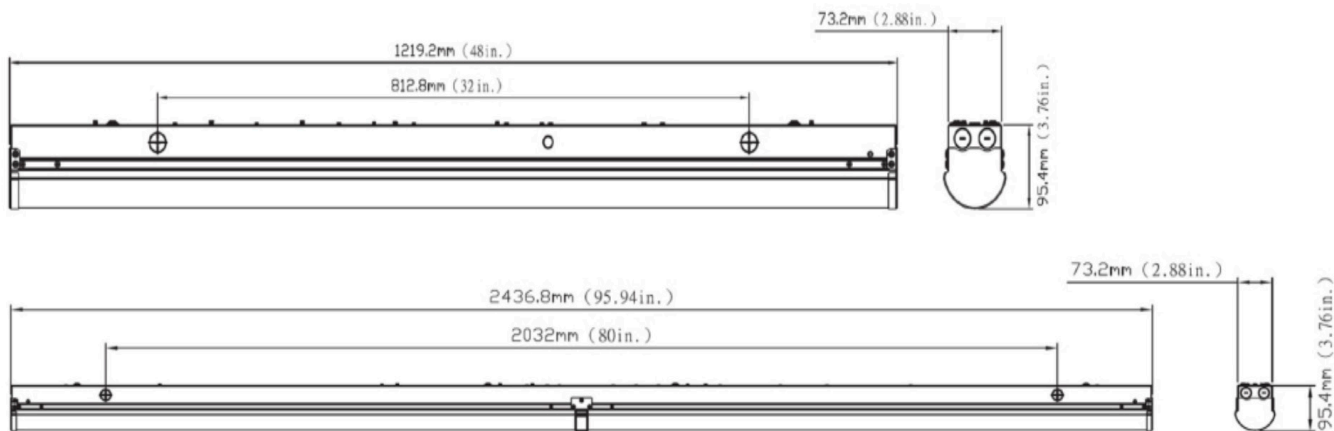

ORDERING GUIDE

EXAMPLE: TS 4 29 G1 4K

Luminaire Type	Lumen Output	Generation	Voltage	CCT	Finish	Option
TS 4	29	G1	Blank	4K	Blank	Blank
TS 4 LED Industrial Strip	29 3013 Lumens	G1*	Blank 120-277V	4K 4000K 5K 5000K	Blank White	Blank No Option M1 On/Off Motion Sensor M2 Dimmable Motion Sensor EL Emergency Battery
	46 4690 Lumens	G2**				
	40 4050 Lumens 60 6050 Lumens	G1*				
TS 8 LED Industrial Strip	59 6026 Lumens	G1*	Blank 120-277V	4K 4000K 5K 5000K	Blank White	Blank No Option M1 On/Off Motion Sensor M2 Dimmable Motion Sensor EL Emergency Battery
	85 8645 Lumens	G2**				
	97 9825 Lumens 80 8000 Lumens 100 10550 Lumens	G1*				

NOTE: Standard driver operates on any line voltage from 120-277V (50/60 Hz).

*G1 are DLC Premium

**G2 are DLC Standards