


87809-SU

sunlite®

LFX/CRD/6R/90CRI/3MW/5SCT/V2

6" Round Commercial Recessed Downlight 13W/19W/27W
27K-50K 0-10V Dimmable 120-347V Energy Star

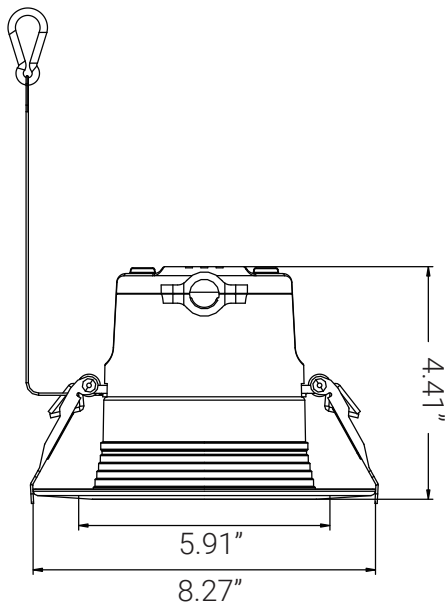

Project: _____
Type: _____
Catalog #: _____
Date: _____
Comments: _____

Technical Specifications

Photometrics

Lumen	1500/2100/3000
Emitted Color	CCT Selectable
Color Temp	27K/30K/35K/40K/50K
Color Rendering Index (CRI)	90
Beam Spread	90°
Lifespan	50000

Electrical

Watt	13/19/27
Input Voltage	120-347
Power Factor	0.9
Dimmable	0-10V Low Voltage

Ratings / Certifications

Safety Certification	ETL - Damp Location
Energy Star Rated	TRUE
IC Rated	TRUE
Operating Temperature	-4°F - 104°F
Warranty	5 Years

Construction

Fixture Material	Aluminum
Fixture Finish	White
Lens Material	Plastic
Lens Finish	White
Shape	Round

