

SYLVANIA Lamps

SubstiTUBE® IPS LED T8

Compatible LED T8 for use with instant start and select programmed rapid start electronic T8 ballasts

SubstiTUBE IPS LED T8 lamps are an energy saving alternative, designed to replace traditional fluorescent T8 lamps. These LED T8 lamps contain no mercury, and provide instant light and a uniform light distribution. Engineered to operate on existing instant start and select program rapid start electronic T8 ballasts, these lamps minimize labor and recycling costs.

Benefits and Features

- The SubstiTUBE IPS LED T8 is not affected by switching cycles, occupancy or vacancy sensors, and thus can be installed with the existing instant start ballasts for optimal energy savings
- NSF Listed: NSF/ANSI Standard 2 – Food Equipment
- No warm-up time, instant-on with full light output and stable lamp to lamp color
- DLC listed allows for rebates in areas where applicable saving on overall project cost
- No UV emission
- Suitable for dry and damp locations (cannot come in direct contact with water)
- Maximize energy savings with occupancy sensors
- Suitable for open and enclosed fixtures
- Glass lamps are suitable for use with tube guards
- Up to 162 LPW (Lamp efficacy)
- 3000K, 3500K, 4100K, 5000K color temperatures
- Dimmable down to 10% with compatible 0-10V ballast (4ft 13W versions only)
- CRI: 82
- Available beam angle: 220° and Light Emitting Angle 340°

Electrical

- Compatible with instant start and select programmed rapid start electronic T8 ballasts with input voltage of 120-277V and 347V
- Power factor >0.90
- THD <10%

Rated Life

- 60,000 hours (L₇₀)



Wattage Comparison

	System Power ¹	Traditional System Power F032T8 (with QHE2x32 ISN)	Energy Savings/Year ²
LED13T8L48FGDIM SUBG9	32W	55W	42%
LED10T8L48FG SUBG9	26W	55W	53%

1. With QHE2x32 ISN
2. 24 hours a day

Warranty

- 5 year limited lamp warranty (24/7 operation)
- Install a new QHE instant start ballast with the SubstiTUBE IPS LED T8 lamp for optimal performance and to take advantage of the QUICK 72SUB+ system warranty. (See website for details.)

Ambient Operating Range

- -4°F to 113°F (-20°C to 45°C)

Max Case Temperature

- 158°F (70°C)

Certifications and Listings

- cULus 1993
- cULus
- ETL
- RoHS
- Lead Free
- FCC*
- NSF
- DLC Standard

Installation

- Please refer to the Installation manual included inside the packaging and the applications information listed below for more information. (G13 medium bi-pin base)

*FCC Title 47 CFR, Part 18, Non-Consumer



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Guide

LED	XX	T8	/	L48	/	FG	/	DIM	8	XX	/	SUB	/	G9
LED	Wattage 10 = 10 Watts 13 = 13 Watts	Lamp Type T8		Length 48"		FG = Frosted Glass		DIM = Dimmable	CRI 8 = 82	Color Temperature 30 = 3000K 35 = 3500K 41 = 4100K 50 = 5000K		SubstiTUBE® IPS		Generation 9

Ordering Information

Item Number	Ordering Abbreviation	Power (W) ¹	Length	Lens Material*	Lamp Efficacy	Typical Lumens (lm)	CCT	CRI	Case Qty	DLC Listed
40691	LED13T8/L48/FG/DIM830/SUB/G9	13	4ft	Glass	154	2000	3000K	82	25	Yes
40692	LED13T8/L48/FG/DIM835/SUB/G9	13	4ft	Glass	154	2000	3500K	82	25	Yes
40693	LED13T8/L48/FG/DIM841/SUB/G9	13	4ft	Glass	162	2100	4100K	82	25	Yes
40694	LED13T8/L48/FG/DIM850/SUB/G9	13	4ft	Glass	162	2100	5000K	82	25	Yes
40695	LED10T8/L48/FG/830/SUB/G9	10	4ft	Glass	160	1600	3000K	82	25	Yes
40696	LED10T8/L48/FG/835/SUB/G9	10	4ft	Glass	160	1600	3500K	82	25	Yes
40697	LED10T8/L48/FG/841/SUB/G9	10	4ft	Glass	160	1600	4100K	82	25	Yes
40698	LED10T8/L48/FG/850/SUB/G9	10	4ft	Glass	160	1600	5000K	82	25	Yes

* Frosted



1. Average Lamp Power and Average Lamp Lumens rated on QHE2x32T8/UNV ISN.

Specifications & Lighting Data

Lamp	Ballast	Current (Amps)	System Power (W)	System Lumens (lm)	System Efficacy (lm/W)	No of Lamps
LED13T8/L48/FG/DIM	QHE 2X32T8/UNV ISN	0.26/0.12	32	4200	130	2
LED10T8/L48/FG	QHE 2X32T8/UNV ISN	0.22/0.10	26	3200	123	2

Note: For complete system information refer to LED495 – SubstiTUBE System Information.

Physical Information

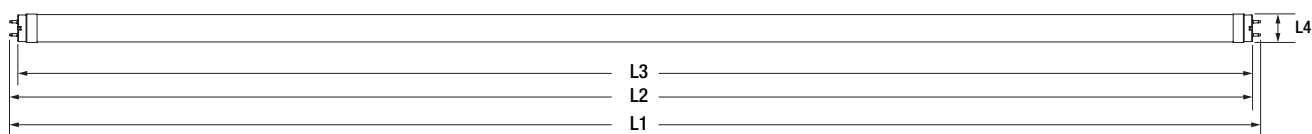

Tc point location next to label

Lamp Description	L1 End of Base Pin to End of Opposite Pin End	L2 Base Face to Opposite Base Pin	L3 Base Face to Base Face	L4 Bulb Outside Diameter
LED13T8/L48/FG/DIM	47.725"±0.055" (1212.2mm ±1.4mm)	47.45"±0.05" (1205.25mm±1.25mm)	max 47.22" (1199.4mm)	1.02"±0.08" (25.9mm±2.0mm)
LED10T8/L48/FG	47.725"±0.055" (1212.2mm ±1.4mm)	47.45"±0.05" (1205.25mm±1.25mm)	max 47.22" (1199.4mm)	1.02"±0.08" (25.9mm±2.0mm)

Application Information

1. Due to numerous ballast designs and topologies, this lamp should be tested on existing ballasts before mass quantities are installed.
2. Not intended for use with older dedicated voltage (120V or 277V) ballasts. These ballasts have electronic components that degrade over time and may become unsuitable for the new LED T8 lamp.
3. All installation, inspection, and maintenance of lighting fixtures should be done with the power to the fixture turned off. Lamps should be installed and operated in compliance with the National Electrical Code (NEC), Underwriters Laboratories Inc. (UL) requirements, and all applicable codes and regulations.
4. Insert and align tubes properly in lamp holders. Partial insertion results in a poor or intermittent electrical contact that can result in short lamp life and arcing. Arcing at the lamp holder can result in localized overheating.
5. For instant start ballasts, use lamp holders with an internal shunt or ensure that lamp holders are wired in a shunt configuration.
6. For Programmed Rapid Start ballasts, use rapid-start lamp holders (non-shunted lamp holders).
7. De-lamp is not allowed for ISH ballasts. For approved ISN and ISL ballasts, de-lamp is allowed for only 1 lamp so long as the ballast factor remains below 1.20 (for example, 4 lamp ballast can de-lamp to 3 lamps).
8. Suitable for use in dry and damp environments.
9. Maximum mounting distance between tube and ballast is 20 feet.
10. Not for use with other LED or fluorescent lamps on the same ballast.
11. Not for use with magnetic ballasts.
12. Please read all installation instructions before attempting installation.
13. For detailed warranty information, please see www.sylvania.com.

LEDVANCE LLC
200 Ballardvale Street
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.

