OCTRON® 25W XP® XL SUPERSAVER® ECOLOGIC®3

EXtended Performance EXtended Life Fluorescent Lamps



SYLVANIA OCTRON 25 Watt XP XL SUPERSAVER ECOLOGIC3 lamps operate on standard T8 instant start systems and provide 22% energy savings over standard 32 Watt OCTRON lamps where slight reductions in light are acceptable.

At \$.10/kWh and 4,000 hours of operation per year, the 22% savings translates to a savings of \$11.20 per fixture per year for a 4-lamp fixture with a normal ballast factor, instant start ballast. Changing from standard Cool White Energy Saving T12 lamps powered by energy saving magnetic ballasts to OCTRON F032/25/800XP/XL/SS/EC03 lamps combined with OSRAM SYLVANIA'S QUICKTRONIC High Efficiency ISN ballasts could save \$24 a year with no light loss. These lamps pass the Federal TCLP test, classifying them as non-hazardous waste in most states. Group relamp to realize the benefits of these OCTRON lamps in your facility.

Key Features & Benefits

- 22% energy savings compared to standard 32W T8 lamp
- 25 Watt, 4-foot, SUPERSAVER energy saving T8 lamp
- A member of the SYLVANIA ECOLOGIC3 family of lamps
- 2,400 Initial lumens
- 96% lumen maintenance at 40% of rated life
- 3500K & 4100K, 85 CRI


- Retrofit lamp for existing T8 instant start systems
- 36,000 hour average rated life @ 3 hrs per start
- Also operates on SYLVANIA QUICKTRONIC® Programmed Rapid Start ballasts
- 40,000 hour average rated life @ 3 hrs per start
- Dimmable (see application note 4)

SYLVANIA OCTRON T8 ECOLOGIC3 fluorescent lamps pass the Federal Toxicity Characteristic Leaching Procedure (TCLP1) criteria for classification as non-hazardous waste in most states.²



ECOLOGIC3 represents a more comprehensive approach to sustainability encompassing high efficiency, long life and RoHS/TCLP compliance.

This light source meets restrictions





2. Lamp disposal regulations may vary; check your local & state regulations.

Product Offering								
Lamp Type	Wattage	ССТ	CRI					
F032/25W/835XP/XL/SS/EC03	25	3500K	85					
F032/25W/841XP/XL/SS/EC03	25	4100K	85					

Application Information

Applications

- Hospitals
- Industrial
- Office
- Retail Schools
- Many applications with T8 instant start ballasts currently using 32W T8 lamps

Fixtures

Contact your local fixture agent for available fixtures.

Application Notes

- 1. Recommended to be used on T8 F32 Instant or Programmed Start ballasts with minimum open circuit voltage of 550V RMS at the lamp.
- a. Electronically ballasted fixture configurations which operate lamps remotely, such as Master/Satellite applications, can cause reduction of lamp open circuit voltage, in the remote fixture, below the minimum required for reliable lamp starting. For more information, please call 1-800-LIGHTBULB and ask for Ballast Technical Assistance or call your fixture manufacturer.
- b. Not recommended to be used: (1) in remotely ballasted fixtures with lamp open circuit voltages below 550V, (2) with Rapid Start ballasts unless the lamp open circuit voltage is greater than 570V, (3) in air handling fixtures, (4) on low power factor ballasts, (5) inverter operated emergency lighting systems unless any of the above equipment is specifically listed for 25 watt lamps. Any of the above situations could result in lamp starting and stabilization problems or system compatibility issues.



Specification Data

Fixture Description:	Туре
Project/Job:	
SYLVANIA lamp:	
SYLVANIA ballast:	
Notes:	

Ordering Information

Item Number	Ordering Abbreviation	Watts	Bulb	Base	Initial Lumens	lm/W	Mean Lumens¹	Avg. Rated Life (hrs.) ²	CCT	CRI
22222	F032/25W/835/XP/XL/SS/EC03	25	T8	Medium bi-pin	2,400	96	2,304	40,000	3500K	85
22223	F032/25W/841/XP/XL/SS/EC03	25	T8	Medium bi-pin	2,400	96	2,304	40,000	4100K	85

- 1. Measured at 40% of rated life.
- Based on 3 hours per start on programmed rapid start ballasts. 12 hours per start life is 46,000 hours.
 Life on instant start ballasts is 36,000 hours at 3 hours per start and 40,000 hours at 12 hours per start.


Ordering Guide

F0	32	1	25W	/	8	41	1	XP/XL	/	SS	1	ECO3
Fluorescent OCTRON	Based on Standard 32W T8 Same Dir		Actual Wattag = 25	е	CRI = 85	Color Temp 35 = 3500 41 = 4100	K CCT	E <u>X</u> tended Performance E <u>X</u> tended Life	Э	SUPERSAVE	3	ECOLOGIC3

Lamp Dimensions

Lamp Type	(A) Max. Overall Length (in.)	(B) Base Face to Opposite Pin (in.)	(C) Max. Base Face to Base Face (in.)	(D) Max. Outside Diameter (in.)	A B C
F032	47.78"	Min. 47.41" Max. 47.50"	47.22"	1.1"	□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

Technical Information

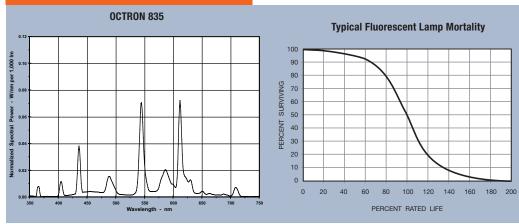

Application Information (continued)

Application Notes

- 2. If an operating lamp is exposed to drafts and/or the ambient temperature falls below 70°F, striation (a rhythmic pulsing pattern of light running down the tube) and/or reduction in lamp brightness may occur. While visually disconcerting, neither behavior is damaging to the lamp and removing the cause (draft or temperature) will return the lamp to normal operation.
- 3. Fixture must conform to ANSI C78.81 2005 requirements for luminaire design.
- 4. Contact OSRAM SYLVANIA for approved dimming ballasts.

Sample Specification

Lamp(s) shall be OCTRON® 25W 800 XP® XL SUPERSAVER® ECOLOGIC® 3 4-foot lamp(s) having medium bi-pin bases. Lamp(s) shall be designed to pass the Federal TCLP test in force at the time of manufacture. Lamp(s) shall have an average rated life of 36,000 hours at 3 hours per start when operated on T8 instant start ballasts, 2,400 initial lumens, 96% lumen maintenance at 40% rated life, a correlated color temperature of (3500K, 4100K) and a CRI of 85. The OCTRON SUPERSAVER ECOLOGIC3 lamp(s) shall be operated on QUICKTRONIC® electronic, high frequency ballasts with complete system warranty from the manufacturer covering lamps and ballast.

Warranty Information

QUICK 60+ $^{\otimes}$ warranty for OSRAM SYLVANIA lamp and ballast combination

Limited 36 month lamp warranty and a five year ballast warranty is possible if both lamps and ballast are provided by OSRAM SYLVANIA. See the QUICK 60+ warranty for details and restrictions.

United States OSRAM SYLVANIA

100 Endicott Street Danvers, MA 01923

Trade

Phone: 1-800-255-5042 Fax: 1-800-255-5043

National Accounts

Phone: 1-800-562-4671 Fax: 1-800-562-4674

OEM/Special Markets

Phone: 1-800-762-7191 Fax: 1-800-762-7192

Display/Optic

Phone: 1-888-677-2627 Fax: 1-800-762-7192

Canada OSRAM SYLVANIA LTD.

2001 Drew Road Mississauga, ON L5S 1S4

Trade

Phone: 1-800-263-2852 Fax: 1-800-667-6772

OEM/Special Markets/Display/Optic

Phone: 1-800-265-2852 Fax: 1-800-667-6772

www.sylvania.com