

SYLVANIA Lamps

DULUX® LED Pin Base Lamps

LED replacement for conventional Compact Fluorescent Lamps for use with existing ballast or directly on line voltage

Application

DULUX LED Pin Based lamps are an energy saving alternative, designed to replace traditional compact fluorescent lamps. These LED lamps contain no mercury, and provide instant light and a uniform light distribution. These lamps are offered in SubstiTUBE® (UL Type A/ballast compatible), LEDlescent™ (UL Type B/ballast-free), or DUALescent™ (UL Type A+B), depending on which family/wattage is chosen. These lamps also minimize labor and recycling costs.

Benefits and Features

- DLC listed lamps allow for rebates in areas where applicable, saving on overall project cost
- System LPW varies from 93 to 134
- CRI >80
- Offered in 3.5, 5.5, 6, 7, 8, 8.5, 9.5, 15, 16 or 17 watts
- Available beam angle:
 - Omnidirectional lamps with 360° beam angle and light emitting angle of 360°
 - High output lamps with either 110° or 120° beam angle and light emitting angle of 260°
 - CCT Selectable lamps with either 110° or 120° beam angle and light emitting angle of 150° or 360°
 - Ultra thin beam angle 160°, and light emitting area 320°
- Energy savings up to 68%
- Can be used in enclosed (lens or diffuser) luminaire. Not approved for use in vapor tight or sealed luminaire.
- Check Pin Based Socket Guide



Pin Based
Socket Guide

Electrical

- SubstiTUBE lamps are compatible with electronic (4-pin) or magnetic (2-pin GX23) ballast; LEDlescent lamps are operated directly wired to line voltage; DUALescent can be operated either on magnetic ballasts or directly wired to line voltage, either 2-pin or 4-pin lamp holders
- Check ballast compatibility guide for approved ballasts for SubstiTUBE or DUALescent Type A operation
- Lamps with "DIM" in the description are 0-10V dimmable with select compatible 0-10V dimming ballasts
- Power Factor >0.9
- THD <20%



Ballast
Compatibility
Guide



New Products for May 2025!

Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
CF42DT/E w/QTP2X26/32/42CF/UNV DM	94	30	68%
CF32DT/E w/QTP2X26/32/42CF/UNV DM	69	30	57%
CF26DD/E w/QTP2X26/CF/UNV DM	54	19	65%
CF18DD/E w/QTP1/2X18CF/UNV DM	38	14	63%
CF26DD/E w/QTP2X26/CF/UNV DM	54	19	65%
CF42DT/E w/QTP2X26/32/42CF/UNV DM	94	31	67%
CF32DT/E w/QTP2X26/32/42CF/UNV DM	69	33	52%
CF26DD w/C2642UNVME	26	8.5	67%
CF18DD w/C218UNVME	18	7	61%
CF26DD w/C2642UNVME	26	9	65%
CF7DS/8XX or CF9DS/8XX	7	3.5	50%
CF13DS/8XX	13	5.5	58%
CF7DS/E/8XX or CF9DS/E/8XX	7	3.5	50%
CF13DS/E/8XX	13	5.5	58%

*Energy savings over life of lamp calculated at \$0.11/kWh

- When operating in UL Type B mode, lamps are compatible with LEDVANCE Emergency Battery Backup (75740)



Emergency Battery
Backup Information

Rated Life

- 50,000 hours (L₇₀)

Warranty

- 5 year limited lamp warranty (24/7 operation)
- NLB Trusted Warranty Program

Ambient Operating Range

- -4°F to +104°F (-20°C to +40°C)



LED581R12 3-25



Catalog #	Type
Project	
Comments	
Prepared by	

Certifications and Listings

- cULus (UL1598c, UL1993, & CSA 22.2 for UL Type B & Type A+B; UL1993 & CSA 22.2 for Type A)
- DLC 5.1 for some lamps
- RoHS
- NSF Listed: NSF/ANSI Standard 2 – Food Equipment
- FCC Title 47 CFR, Part 15 Non-Consumer (UL Type B & UL Type A+B) or Part 18 Non-Consumer (UL Type A), ICES
- Mercury Free

Installation

Please refer to the installation manual included inside the packaging for more information.

Ordering Guide

LED	XX	PB	XXXX	X	DIM	8	XXX	XXX
Product Name	Wattage	Pin Base	Base Type	Orientation	Dimmable	CRI	Color Temperature	UL Type
LED = LED Technology	3.5 = 3.5W		2G7 = 4-pin	V = Vertical		8 = 80+	27 = 2700K	BF = Type B
	5.5 = 5.5W		2GX7 = 4-pin	H = Horizontal			30 = 3000K	SUB = Type A
	6 = 6W		G23 = 2-pin	O = Omnidirectional			35 = 3500K	AB = Type AB
	7 = 7W		GX23 = 2-pin				41 = 4100K	
	8.5 = 8.5W		G24D = 2-pin				SC1 = CCT Selectable	
	9 = 9W		GX24D = 2-pin				3000K/3500K/4100K	
	9.5 = 9.5W		G24Q = 4-pin				SC8 = CCT Selectable	
	15 = 15W						2700K/3000K/3500K/4100K	
	16 = 16W						SC16 = CCT Selectable	
	17 = 17W						3000K/3500K/4100K/5000K	

Ordering Information

Item Number	Ordering Abbreviation	Lamp Wattage (W)	Base Type	Replaces	Input Voltage (V)	Avg. Life (hrs)	CCT	Typical Lumens (lm)	CRI	Power Factor	Bulb Finish	Case Qty.	DLC Listed*
SubstiTUBE® High Output													
41705**	LED15PBG24QHDIM830SUB	15	G24Q/GX24Q	CF42DT/E	Ballast dependent	50,000	3000K	1900	80+	>0.9	Plastic	24	5.1
41706**	LED15PBG24QVDIM830SUB	15	G24Q/GX24Q	CF42DT/E	Ballast dependent	50,000	3000K	2000	80+	>0.9	Plastic	24	5.1
41707**	LED15PBG24QHDIM835SUB	15	G24Q/GX24Q	CF42DT/E	Ballast dependent	50,000	3500K	1900	80+	>0.9	Plastic	24	5.1
41708**	LED15PBG24QVDIM835SUB	15	G24Q/GX24Q	CF42DT/E	Ballast dependent	50,000	3500K	2000	80+	>0.9	Plastic	24	5.1
41709**	LED15PBG24QHDIM841SUB	15	G24Q/GX24Q	CF42DT/E	Ballast dependent	50,000	4100K	1900	80+	>0.9	Plastic	24	5.1
41710**	LED15PBG24QVDIM841SUB	15	G24Q/GX24Q	CF42DT/E	Ballast dependent	50,000	4100K	2000	80+	>0.9	Plastic	24	5.1
SubstiTUBE CCT Selectable													
41701**	LED9.5PBG24QHDIM8SC1SUB	9.5	G24Q/GX24Q	CF26DD/E	Ballast dependent	50,000	3000K/3500K/4100K	960 1020 1050	80+	>0.9	Plastic	24	5.1
41702**	LED9.5PBG24QVDIM8SC1SUB	9.5	G24Q/GX24Q	CF26DD/E	Ballast dependent	50,000	3000K/3500K/4100K	1100 1120 1150	80+	>0.9	Plastic	24	5.1
SubstiTUBE Omnidirectional													
41711 [†]	LED7PBG24QODIM827SUB	7	G24Q/GX24Q	CF18DD/E	Ballast dependent	50,000	2700K	820	80+	>0.9	Plastic	24	N/A
41712 [†]	LED7PBG24QODIM830SUB	7	G24Q/GX24Q	CF18DD/E	Ballast dependent	50,000	3000K	820	80+	>0.9	Plastic	24	N/A
41713 [†]	LED7PBG24QODIM835SUB	7	G24Q/GX24Q	CF18DD/E	Ballast dependent	50,000	3500K	820	80+	>0.9	Plastic	24	N/A
41714 [†]	LED7PBG24QODIM841SUB	7	G24Q/GX24Q	CF18DD/E	Ballast dependent	50,000	4100K	820	80+	>0.9	Plastic	24	N/A
41715 [†]	LED9.5PBG24QODIM827SUB	9.5	G24Q/GX24Q	CF26DD/E	Ballast dependent	50,000	2700K	1200	80+	>0.9	Plastic	24	N/A
41716 [†]	LED9.5PBG24QODIM830SUB	9.5	G24Q/GX24Q	CF26DD/E	Ballast dependent	50,000	3000K	1200	80+	>0.9	Plastic	24	N/A
41717 [†]	LED9.5PBG24QODIM835SUB	9.5	G24Q/GX24Q	CF26DD/E	Ballast dependent	50,000	3500K	1200	80+	>0.9	Plastic	24	N/A
41718 [†]	LED9.5PBG24QODIM841SUB	9.5	G24Q/GX24Q	CF26DD/E	Ballast dependent	50,000	4100K	1200	80+	>0.9	Plastic	24	N/A
LEDlescent™ High Output													
41695 ^{†‡}	LED15PBG24DH830BF	15	G24D/G24Q/GX24Q	CF42DT/E	120-277	50,000	3000K	1900	80+	>0.9	Plastic	24	N/A
41697 ^{†‡}	LED15PBG24DH835BF	15	G24D/G24Q/GX24Q	CF42DT/E	120-277	50,000	3500K	1900	80+	>0.9	Plastic	24	N/A
41699 ^{†‡}	LED15PBG24DH841BF	15	G24D/G24Q/GX24Q	CF42DT/E	120-277	50,000	4100K	1900	80+	>0.9	Plastic	24	N/A
41696 [†]	LED16PBG24DV830BF	16	G24D/G24Q/GX24Q	CF42DT/E	120-277	50,000	3000K	2000	80+	>0.9	Plastic	24	N/A
41698 [†]	LED16PBG24DV835BF	16	G24D/G24Q/GX24Q	CF42DT/E	120-277	50,000	3500K	2000	80+	>0.9	Plastic	24	N/A
41700 [†]	LED16PBG24DV841BF	16	G24D/G24Q/GX24Q	CF42DT/E	120-277	50,000	4100K	2000	80+	>0.9	Plastic	24	N/A
LEDlescent High Output Omnidirectional													
42505 [†]	LED15PBGX24D08SC8BF	15	GX24D	CF32DT/E	120-277	50,000	3000/3500/4100/5000K	1900/2000/2100/2200	80+	>0.9	Plastic	24	N/A
42506 [†]	LED17PBGX24D08SC8BF	17	GX24D	CF42DT/E	120-277	50,000	3000/3500/4100/5000K	2200/2300/2400/2500	80+	>0.9	Plastic	24	N/A

*No DLC category for lamps with N/A

**Can be used in enclosed (lens or diffuser) luminaire. Not approved for use in vapor tight or sealed luminaire.

[†]Not suitable for use in enclosed (lens or diffuser) luminaire. Not approved to use in vapor tight or sealed luminaire.

[‡]Products indicated have rotatable bases for adjusting direction of light output

Ordering Information (continued)

Item Number	Ordering Abbreviation	Lamp Wattage (W)	Base Type	Replaces	Input Voltage (V)	Avg. Life (hrs)	CCT	Typical Lumens (lm)	CRI	Power Factor	Bulb Finish	Case Qty.	DLC Listed*
LEDlescent™ Ultra Thin													
42068**	LED3.5PB2G7H827BF	3.5	2G7	CF7DS/E or CF9DS/E	120-277	50,000	2700K	330	80+	>0.9	Plastic	24	N/A
42069**	LED3.5PB2G7H830BF	3.5	2G7	CF7DS/E or CF9DS/E	120-277	50,000	3000K	340	80+	>0.9	Plastic	24	N/A
42070**	LED3.5PB2G7H835BF	3.5	2G7	CF7DS/E or CF9DS/E	120-277	50,000	3500K	350	80+	>0.9	Plastic	24	N/A
42071**	LED3.5PB2G7H841BF	3.5	2G7	CF7DS/E or CF9DS/E	120-277	50,000	4100K	360	80+	>0.9	Plastic	24	N/A
42072**	LED5.5PB2GX7H827BF	5.5	2GX7	CF13DS/E	120-277	50,000	2700K	550	80+	>0.9	Plastic	24	N/A
42073**	LED5.5PB2GX7H830BF	5.5	2GX7	CF13DS/E	120-277	50,000	3000K	550	80+	>0.9	Plastic	24	N/A
42074**	LED5.5PB2GX7H835BF	5.5	2GX7	CF13DS/E	120-277	50,000	3500K	570	80+	>0.9	Plastic	24	N/A
42075**	LED5.5PB2GX7H841BF	5.5	2GX7	CF13DS/E	120-277	50,000	4100K	590	80+	>0.9	Plastic	24	N/A
DUALescent™ CCT Selectable													
41691**†	LED8.5PBG24D8SC1AB	8.5	G24D/G24Q/GX24Q	CF26DD	Ballast or 120-277	50,000	3000K/3500K/4100K	960/1020/1050	80+	>0.9	Plastic	24	N/A
41692**	LED8.5PBG24DV8SC1AB	8.5	G24D/G24Q/GX24Q	CF26DD	Ballast or 120-277	50,000	3000K/3500K/4100K	1100/1120/1150	80+	>0.9	Plastic	24	N/A
DUALescent Omnidirectional													
42503**	LED5.5PBGX2308SC16AB	5.5	GX23	CF13DS	Ballast or 120-277	50,000	2700/3000/3500/4100K	720/750/800/800	80+	>0.9	Plastic	24	N/A
42504**	LED5.5PBGX24D08SC16AB	5.5	G24D	CF13DD	Ballast or 120-277	50,000	2700/3000/3500/4100K	720/750/800/800	80+	>0.9	Plastic	24	N/A
41719**	LED7PBG24D0827AB	7	G24D/G24Q/GX24Q	CF18DD	Ballast or 120-277	50,000	2700K	830	80+	>0.9	Plastic	24	N/A
41720**	LED7PBG24D0830AB	7	G24D/G24Q/GX24Q	CF18DD	Ballast or 120-277	50,000	3000K	880	80+	>0.9	Plastic	24	N/A
41721**	LED7PBG24D0835AB	7	G24D/G24Q/GX24Q	CF18DD	Ballast or 120-277	50,000	3500K	880	80+	>0.9	Plastic	24	N/A
41722**	LED7PBG24D0841AB	7	G24D/G24Q/GX24Q	CF18DD	Ballast or 120-277	50,000	4100K	900	80+	>0.9	Plastic	24	N/A
41723**	LED9PBG24D0827AB	9	G24D/G24Q/GX24Q	CF26DD	Ballast or 120-277	50,000	2700K	1150	80+	>0.9	Plastic	24	N/A
41724**	LED9PBG24D0830AB	9	G24D/G24Q/GX24Q	CF26DD	Ballast or 120-277	50,000	3000K	1200	80+	>0.9	Plastic	24	N/A
41725**	LED9PBG24D0835AB	9	G24D/G24Q/GX24Q	CF26DD	Ballast or 120-277	50,000	3500K	1250	80+	>0.9	Plastic	24	N/A
41726**	LED9PBG24D0841AB	9	G24D/G24Q/GX24Q	CF26DD	Ballast or 120-277	50,000	4100K	1250	80+	>0.9	Plastic	24	N/A
42508**	LED9PBG24D08SC16AB	9	G24D	CF26DD	Ballast or 120-277	50,000	2700/3000/3500/4100K	1050/1100/1200/1200	80+	>0.9	Plastic	24	N/A
42507**	LED9PBG24Q0DIM8SC1AB	9.5	G24Q	CF26DD/E	Electronic Ballast or 120-277	50,000	3000/3500/4100K	1100/1200/1200	80+	>0.9	Plastic	24	N/A
DUALescent Ultra Thin													
42060**	LED3.5PBG23H827AB	3.5	G23	CF7DS or CF9DS	Ballast or 120-277	50,000	2700K	330	80+	>0.9	Plastic	24	N/A
42061**	LED3.5PBG23H830AB	3.5	G23	CF7DS or CF9DS	Ballast or 120-277	50,000	3000K	340	80+	>0.9	Plastic	24	N/A
42062**	LED3.5PBG23H835AB	3.5	G23	CF7DS or CF9DS	Ballast or 120-277	50,000	3500K	350	80+	>0.9	Plastic	24	N/A
42063**	LED3.5PBG23H841AB	3.5	G23	CF7DS or CF9DS	Ballast or 120-277	50,000	4100K	360	80+	>0.9	Plastic	24	N/A
42509**	LED3.5PBG23H8SC16AB	3.5	G23	CF5DS, CF7DS or CF9DS	Ballast or 120-277	50,000	2700/3000/3500/4100K	360/370/380/400	80+	>0.9	Plastic	24	N/A
42064**	LED5.5PBGX23H827AB	5.5	GX23	CF13DS	Ballast or 120-277	50,000	2700K	550	80+	>0.9	Plastic	24	N/A
42065**	LED5.5PBGX23H830AB	5.5	GX23	CF13DS	Ballast or 120-277	50,000	3000K	550	80+	>0.9	Plastic	24	N/A
42066**	LED5.5PBGX23H835AB	5.5	GX23	CF13DS	Ballast or 120-277	50,000	3500K	570	80+	>0.9	Plastic	24	N/A
42067**	LED5.5PBGX23H841AB	5.5	GX23	CF13DS	Ballast or 120-277	50,000	4100K	590	80+	>0.9	Plastic	24	N/A
42510**	LED5.5PBGX23H8SC16AB	5.5	GX23	CF13DS	Ballast or 120-277	50,000	2700/3000/3500/4100K	580/590/600/620	80+	>0.9	Plastic	24	N/A

*No DLC category for lamps with N/A

**Can be used in enclosed (lens or diffuser) luminaire. Not approved for use in vapor tight or sealed luminaire.

†Not suitable for use in enclosed (lens or diffuser) luminaire. Not approved for use in vapor tight or sealed luminaire.

‡Products indicated have rotatable bases for adjusting direction of light output

Specifications & Lighting Data

Lamp	UL Type	Current (AMPS) (120V/277V)	System Power (W)	System Lumens (lm)*	System Efficacy (lm/W)	No of Lamps
LED15PBG24Q(HDIM8XXSUB	Type A	0.25/0.11	30	3800	127	2
LED15PBG24QVDIM8XXSUB	Type A	0.25/0.11	30	4000	133	2
LED15PBG24DH8XXBF	Type B	0.25/0.16	30	3800	137	2
LED16PBG24DV8XXBF	Type B	0.27/0.11	32	4000	125	2
LED9.5PBG24QHDIM8SC1SUB	Type A	0.08/0.03	9.5	1150	121	1
LED9.5PBG24QVDIM8SC1SUB	Type A	0.08/0.03	9.5	1200	126	1
LED8.5PBG24DH8SC1AB	Type AB	0.07/0.03	8.5	1050	124	1
LED8.5PBG24DV8SC1AB	Type AB	0.07/0.03	8.5	1150	135	1
LED7PBG24QODIM8XXSUB	Type A	0.06/0.03	7	820	117	1
LED9.5PBG24QODIM8XXSUB	Type A	0.08/0.03	9.5	1200	126	1
LED7PBG24D08XXAB	Type AB	0.06/0.03	7	820	117	1
LED9PBG24D08XXAB	Type AB	0.08/0.03	9	1200	133	1
LED3.5PBG23H8XXAB	Type AB	0.03/0.01	3.5	340	97	1
LED5.5PBGX23H8XXAB	Type AB	0.05/0.02	5.5	550	100	1
LED3.5PB2G7H8XXBF	Type B	0.03/0.01	3.5	340	97	1
LED5.5PB2GX7H8XXBF	Type B	0.05/0.02	5.5	550	100	1
LED5.5PBGX2308SC16AB	Type AB	0.05/0.02	5.5	800	145	1
LED5.5PBG2408SC16AB	Type AB	0.05/0.02	5.5	800	145	1
LED9PBG24QODIM8SC1AB	Type AB	0.09/0.03	9.5	1200	126	1
LED9PBG24D08SC16AB	Type AB	0.09/0.03	9	1200	126	1
LED3.5PBG23H8SC16AB	Type AB	0.03/0.01	3.5	380	109	1
LED5.5PBGX23H8SC16AB	Type AB	0.05/0.02	5.5	600	109	1
LED15PBGX24D08SC8BF	Type B	0.14/0.05	15	2100	140	1
LED17PBGX24D08SC8BF	Type B	0.16/0.06	17	2400	141	1


*Lumen at 4100K CCT.

Physical Information


Lamp Description	Max. Overall Length inch (mm)	Base Face to Top of Lamp inch (mm)	Nominal Lamp Diameter/Width inch (mm)	Guide Post Length inch (mm)
LED15PBG24QHDIM8XXSUB	6.65 (169)	6.04 (153.5)	1.77 (45)	0.61 (15.5)
LED15PBG24QVDIM8XXSUB	6.40 (162.5)	5.79 (147)	3.46 (88)	0.61 (15.5)
LED15PBG24DH8XXBF	6.65 (169)	6.04 (153.5)	1.77 (45)	0.61 (15.5)
LED16PBG24DV8XXBF	6.40 (162.5)	5.79 (147)	3.46 (88)	0.61 (15.5)
LED9.5PBG24QHDIM8SC1SUB	6.35 (161.4)	5.74 (145.9)	1.31 (33.2)	0.61 (15.5)
LED9.5PBG24QVDIM8SC1SUB	5.11 (130)	4.51 (114.5)	2.76 (70)	0.61 (15.5)
LED8.5PBG24DH8SC1AB	6.35 (161.4)	5.74 (145.9)	1.31 (33.2)	0.61 (15.5)
LED8.5PBG24DV8SC1AB	5.11 (130)	4.51 (114.5)	2.76 (70)	0.61 (15.5)
LED7PBG24QODIM8XXSUB	5.69 (144.5)	5.09 (129)	1.36 (34.5)	0.61 (15.5)
LED9.5PBG24QODIM8XXSUB	6.87 (174.5)	6.26 (159)	1.36 (34.5)	0.61 (15.5)
LED7PBG24D08XXAB	5.69 (144.5)	5.09 (129)	1.36 (34.5)	0.61 (15.5)
LED9PBG24D08XXAB	6.87 (174.5)	6.26 (159)	1.36 (34.5)	0.61 (15.5)
LED6PBGX238XX	6.77 (172)	6.18 (157)	1.06 (27)	0.59 (15)
LED3.5PBG23H8XXAB	5.28 (134)	4.49 (114)	1.26 (32)	0.79 (20)
LED5.5PBGX23H8XXAB	7.05 (179)	6.26 (159)	1.26 (32)	0.79 (20)
LED3.5PB2G7H8XXBF	4.74 (120.4)	4.49 (114)	1.46 (37)	N/A
LED5.5PB2GX7H8XXBF	6.51 (165.4)	6.26 (159)	1.46 (37)	N/A
LED5.5PBGX2308SC16AB	4.96 (126)	4.35 (110.5)	1.36 (34.5)	0.61 (15.5)
LED5.5PBG24D08SC16AB	5.06 (128.5)	4.45 (113)	1.36 (34.5)	0.61 (15.5)
LED9PBG24QODIM8SC1AB	6.87 (174.5)	6.26 (159)	1.36 (34.5)	0.61 (15.5)
LED9PBG24D08SC16AB	6.87 (174.5)	6.26 (159)	1.36 (34.5)	0.61 (15.5)
LED3.5PBG23H8SC16AB	5.28 (134)	4.49 (114)	1.26 (32)	0.79 (20)
LED5.5PBGX23H8SC16AB	7.05 (179)	6.26 (159)	1.26 (32)	0.79 (20)
LED15PBGX24D08SC8BF	6.29 (159.9)	5.68 (144.4)	2.01 (51.1)	0.61 (15.5)
LED17PBGX24D08SC8BF	6.69 (169.9)	6.08 (154.4)	2.01 (51.1)	0.61 (15.5)

Physical Information

7W Omnidirectional SubstiTUBE® and DUALescent™

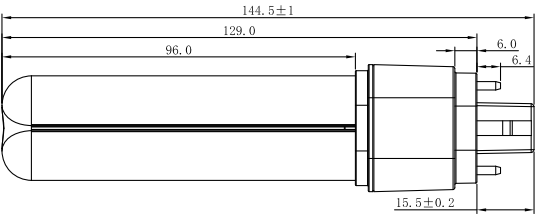


9W Omnidirectional SubstiTUBE and DUALescent

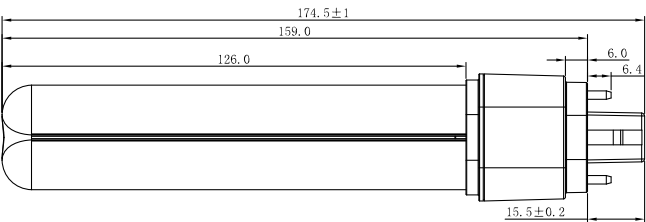


CCT Selectable UL Type A SubstiTUBE and UL Type A+B DUALescent Horizontal

Front View

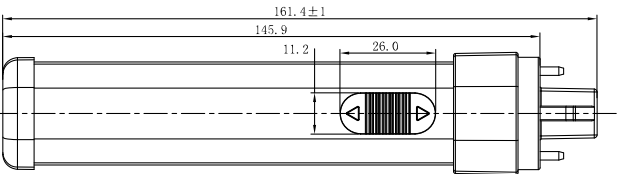


Side View

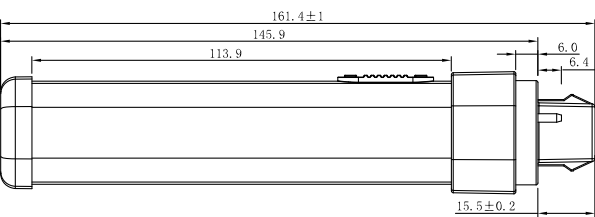


Dimensions in mm

Dimensions in mm


DUALescent UL Type A+B Base – G24d



SubstiTUBE UL Type A Base – G24q




DUALescent UL Type A+B Base – G24d



Rotatable Base

SubstiTUBE UL Type A Base – G24q



Rotatable Base



G24Q (41711-41714) or G24D (41719-41722)



G24Q (41715-41718) or G24D (41723-41726)



G24D (41691)




G24Q (41701)


Physical Information (continued)

CCT Selectable UL Type A SubstiTUBE® and UL Type A+B DUALescent™ Vertical


Front View




Side View



DUALescent UL Type A+B
Base – G24d




SubstiTUBE UL Type A
Base – G24q




G24Q (41702) or
G24D (41692)

High Output UL Type A SubstiTUBE and UL Type B LEDlescent™ Horizontal

Front View

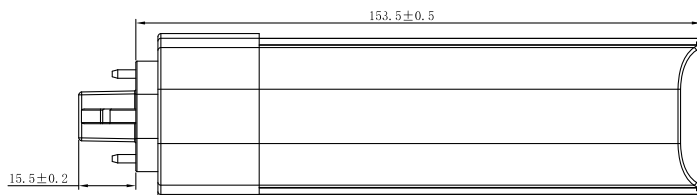


LEDlescent UL Type B
Base – G24d




High Output SubstiTUBE UL Type A and LEDlescent UL Type B Horizontal

Side View

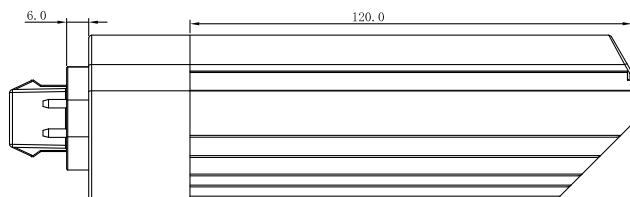

Rotatable Base

SubstiTUBE UL Type A
Base – G24q




Rotatable Base




G24Q (41705,
41707, 4170) or
G24D (41695,
41697, 41699)


High Output SubstiTUBE UL Type A and LEDlescent UL Type B Vertical



LEDlescent UL Type B
Base – G24d



SubstiTUBE UL Type A
Base – G24q




G24Q (41706,
41708, 417010)
or G24D (41696,
41698, 41700)

Dimensions in mm

Physical Information (continued)

LEDlescent™ Ultra Thin
for 2G7

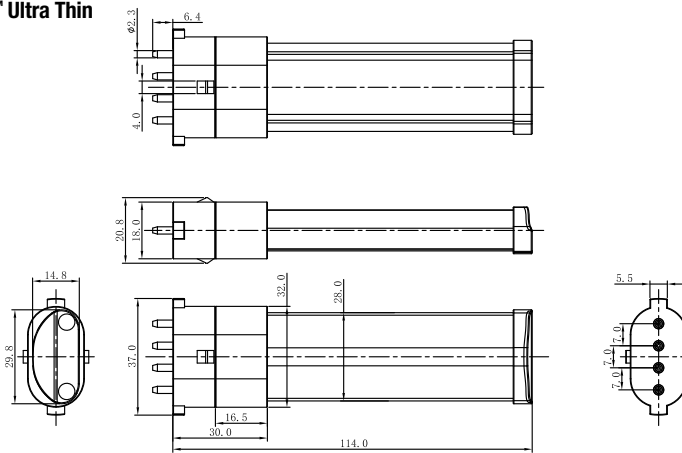


LEDlescent UL Type B
Base – 2G7



2G7
(42068-42071)

LEDlescent Ultra Thin
for 2GX7

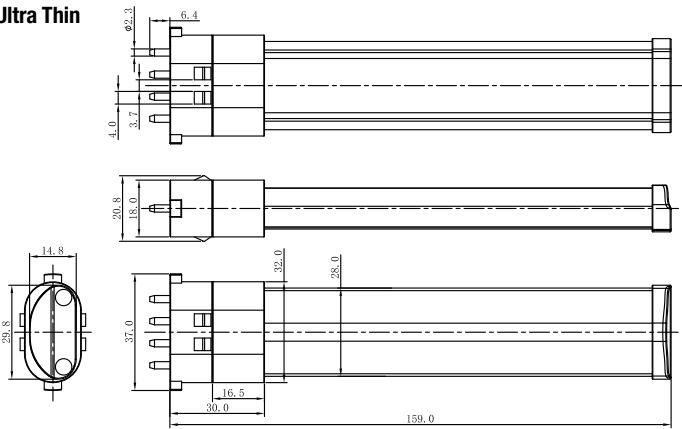


LEDlescent UL Type B
Base – 2GX7



2GX7
(42072-42075)

DUALescent™ Ultra Thin
for G23

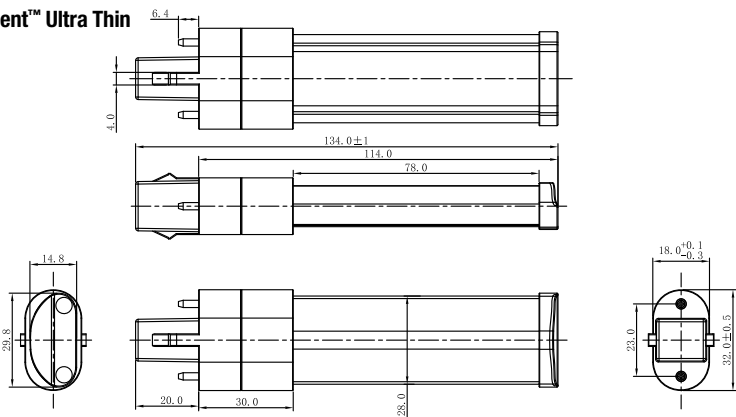


DUALescent UL Type A+B
Base – G23



G23
(42060-42063)

GX23
(42064-42067)

DUALescent Ultra Thin
for GX23

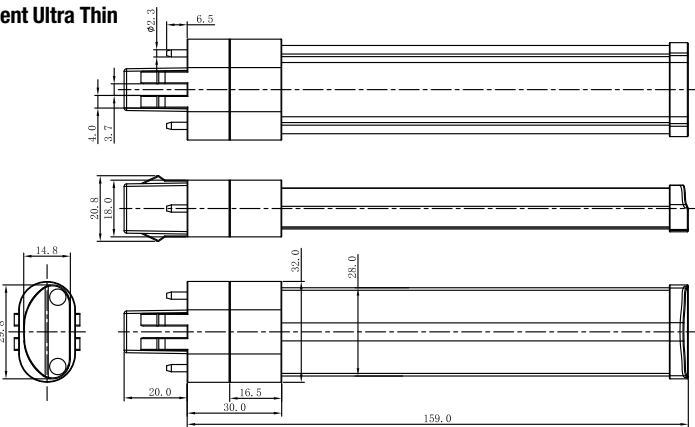


DUALescent UL Type A+B
Base – GX23

Dimensions in mm



Physical Information (continued)

DUALescent™ CCT Select Omnidirectional 5.5W

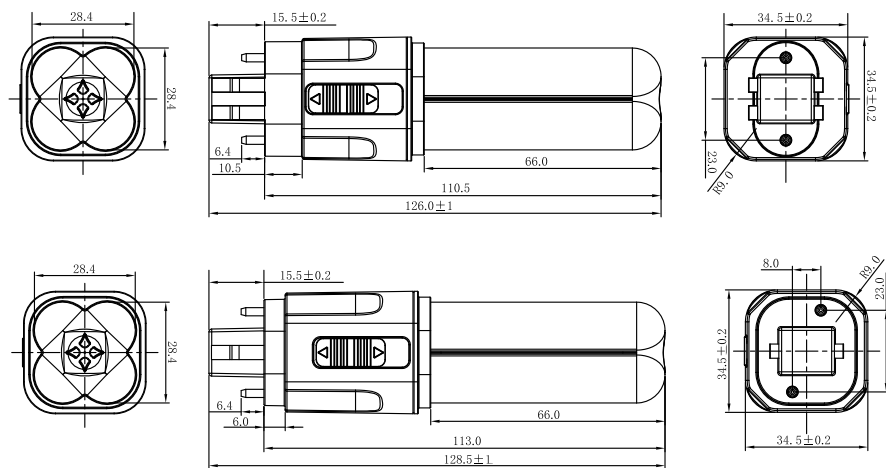


GX23 (42503) or
G24D (42504)

DUALescent CCT Select Omnidirectional 9.5W

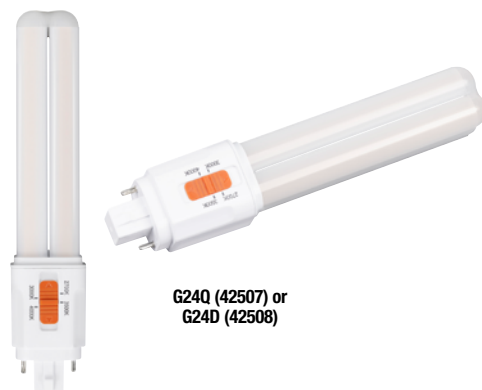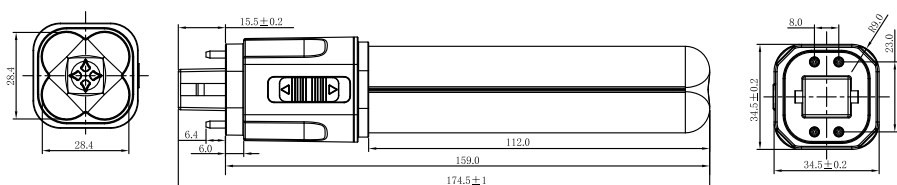

G24Q (42507) or
G24D (42508)


DUALescent CCT Select Ultra Thin 3.5W

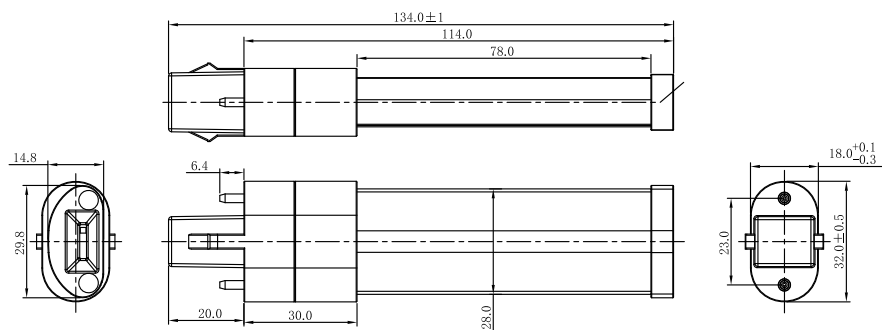

G23 (42509)

GX23 (42510)

DUALescent CCT Select Ultra Thin 5.5W

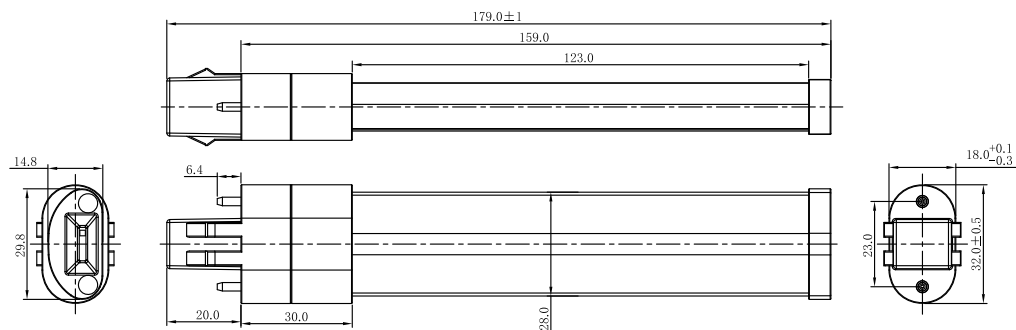


Dimensions in mm




CCT Selector
Switch
(42509-42510)

Physical Information (continued)

LEDlescent™ CCT Select Omnidirectional 15W

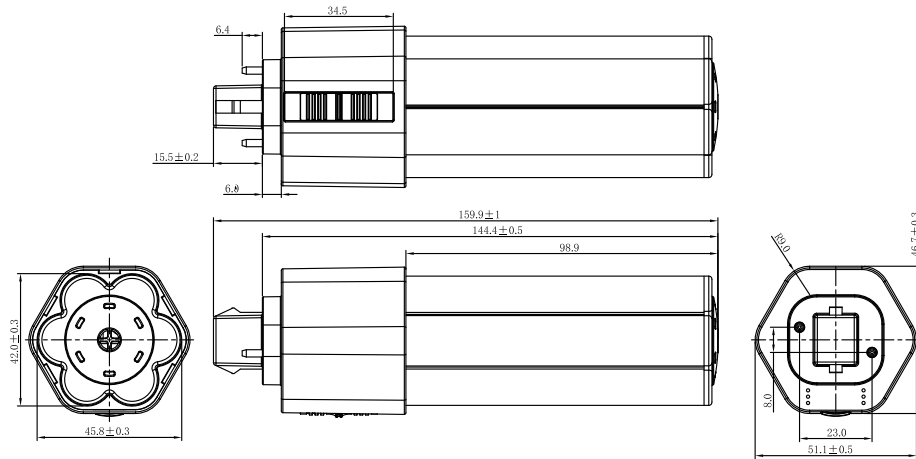

LEDlescent CCT Select Omnidirectional 17W

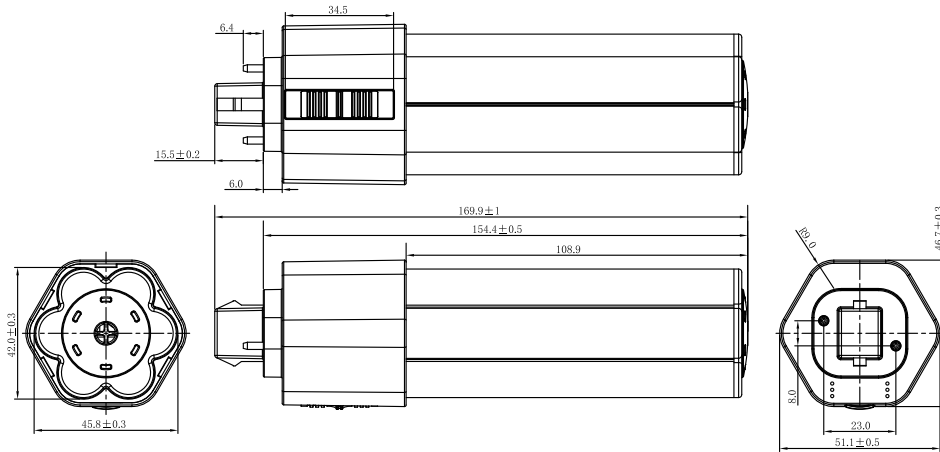

Dimensions in mm

LEDVANCE LLC
181 Ballardvale Street, Suite 203
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA