

LEDVANCE LUMINAIRES

DUAL SELECTABLE

JELLY JAR

LEDVANCE LUMINAIRE SPECIFICATION DATA

Catalog #	Comments
Project	
Type	
Prepared by	

VALUE CLASS™



APPLICATION

The Jelly Jar luminaires are an environmentally preferable alternative to traditional HID luminaires, offering up to 87% in energy savings. The Value Class Dual Selectable Jelly Jar is an all-in-one product with two lumen packages and three light colors in the same SKU. It is ideal for illuminating building exteriors, outdoor corridors, walkways and stairwells.

BENEFITS & FEATURES

- Lightweight, compact design
- Easy installation with FLEX MOUNT: wall, ceiling, or pendant mount
- Selectable color temperature: 3000K, 4000K, 5000K in the same product
- CRI>80
- Wattage/Lumen selectable: 10/20W (1000/2000lm)
- Frosted glass lens. Colored lenses available as accessories.

FLEXMOUNT™



ELECTRICAL

- 120-347V_{AC}
- Power Factor > 0.9
- THD < 20%
- 0-10V Dimmable

OPERATING TEMPERATURE

- -40°F to +122°F (-40°C to +50°C)

RATED LIFE

- 50,000 (L₇₀)

CERTIFICATIONS & LISTINGS

- cULus listed to UL1598 standards
- RoHs
- FCC
- IP65, wet location

WARRANTY

- 5 year
- NLB Trusted Warranty Program

INSTALLATION

- Wall mount, ceiling mount, pendant mount (1/2" conduit by others)
- Factory settings: 20W | 4000K



INSTALLATION GUIDE

WATTAGE COMPARISON

LED SOURCE WATTAGE/LUMENS	REPLACES TRADITIONAL SOURCE	ENERGY SAVINGS
10W/1000lm	Incandescent	up to 75W
20W/2000lm		up to 150W

ORDERING GUIDE

JELYJAR	2A /	S020	UNH	D	8	SC2 /	GR
PRODUCT NAME	GENERATION	WATTAGE	VOLTAGE	DIMMING	CRI	COLOR TEMPERATURE	COLOR/FINISH
JELYJAR = Jelly Jar	2A = Generation 2A	S020 = 10/20W	UNH = 120-347V	D = 0-10V Dimming	8 = >80 CRI	SC2 = 3000/4000/5000K	GR = Gray

ORDERING INFORMATION


ITEM #	ORDERING ABBREVIATION	WATTAGE (W)	INPUT VOLTAGE (V)	DIM. (V)	CRI	COLOR TEMP (CCT)	DISTRIBUTION	TOTAL LUMENS @ 4000K (LM)	LPW	BUG RATING	COLOR/FINISH
62448	JELYJAR2A/S020UNHD8SC2/GR	10/20	120-347	0-10	>80	3000/4000/5000K	Type V	1000/2000	100	B1U3G1	Gray

PHYSICAL INFORMATION


LUMINAIRE DESCRIPTION	LENGTH IN (MM)	WIDTH IN (MM)	HEIGHT IN (MM)	WEIGHT LB (KG)
Ceiling Mount	5.61 (142.5)	5.61 (142.5)	14.12 (358.5)	3.1 (1.4)
Wall Mount	6.46 (164)	5.61 (142.5)	12.07 (306.5)	3.1 (1.4)

PHYSICAL INFORMATION (CONTINUED)

CEILING MOUNT

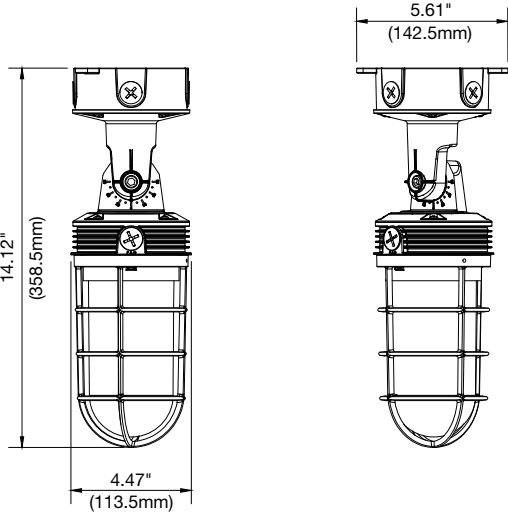


WALL MOUNT

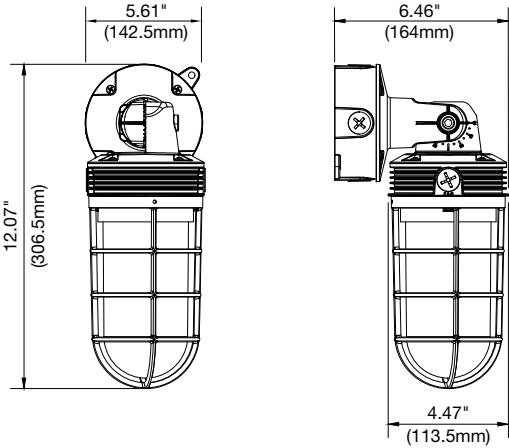

FLEXMOUNT

Multiple mounting options in the same product: wall, ceiling or pendant mount

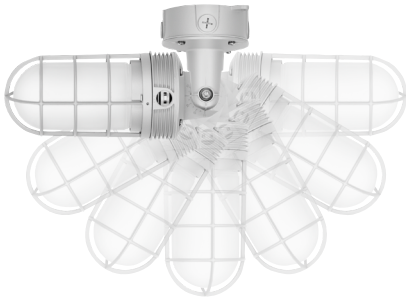

ACCESSORIES


ITEM #	ORDERING ABBREVIATION	ITEM DESCRIPTION
Colored Lenses		
63789	JELYJAR2AREDLENS	Red lenses
63903	JELYJAR2ABLUELENS	Blue lenses
64275	JELYJAR2AGREENLENS	Green lenses
64276	JELYJAR2AYELLOWLENS	Yellow lenses
64277	JELYJAR2AFROSTEDLENS	Frosted lenses




PHOTOMETRIC INFORMATION

HORIZONTAL ISO FOOT-CANDLE PLOTS

10W at 10' mounting height

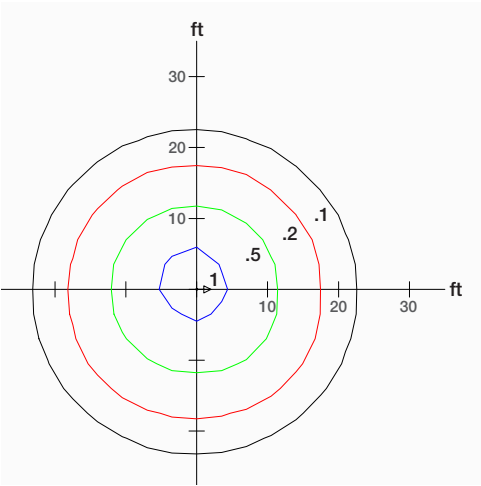


20W at 10' mounting height

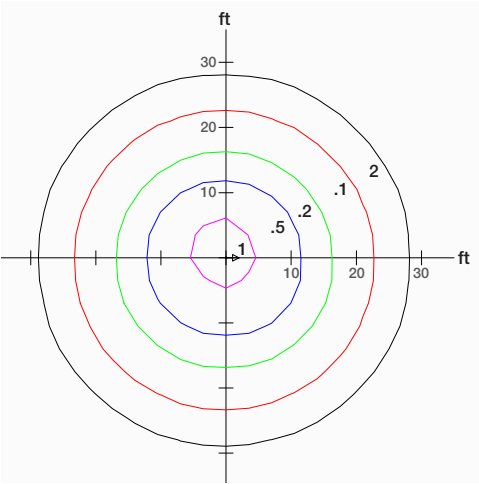

MOUNTING HEIGHT (FT)	8	10	12	15
MULTIPLIER	1.56	1	0.69	0.44

- Multiply the footcandle levels in the diagram according to the desired installation height
- Each tick on the diagram represents a multiple of the mounting height from the fixture

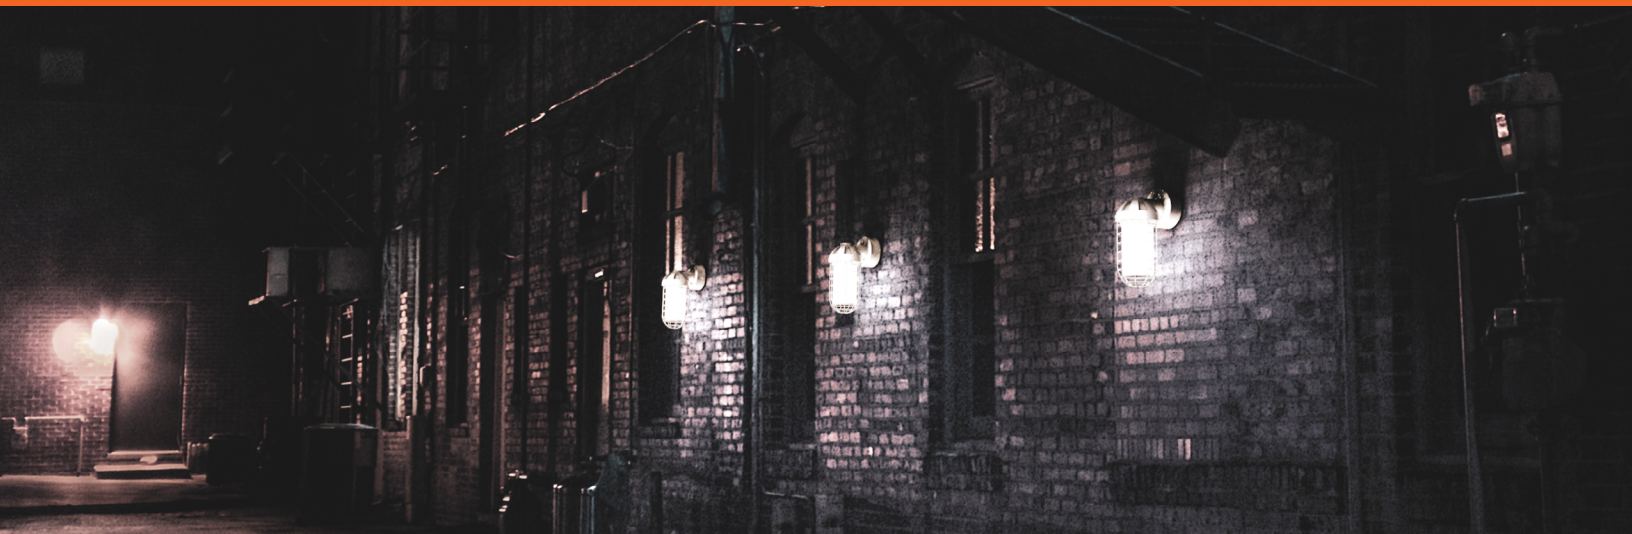

LEDVANCE LLC
181 Ballardvale Street, Suite 203
Wilmington, MA 01887 USA
Phone: 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

LEDVANCE is a registered trademark.
All other trademarks are those of their respective owners.
Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA