



Ubiquity™ 2 LED T8 Direct Wire

LED T8 Bypass Lamps

An ideal retrofit solution, the Ubiquity™ 2 LED T8 Direct Wire lamps can be wired to one end or to both ends. This significantly reduces your labor and related expenses, and eliminates the need for external ballasts and LED drivers.

At 12.5 watts, these DLC listed lamps offer an energy-saving upgrade for F32T8 fluorescent lamps. Ubiquity 2 LED T8 Direct Wire lamps are available in 4000K and 5000K and are made with a shatterproof glass tube. Glass provides very good thermal conductivity and transparency. The tube is frosted to prevent glare and allows the 240 degree beam angle (325 degree visible light area) to create a quality lighted environment. Tested to NSF standards, these lamps are ETL Sanitation Listed and suitable for use in areas where food is prepared.

USHIO is proud to stand behind these 50,000 hour rated life LED lamps with a 5-year limited warranty.

APPLICATIONS

- Fluorescent Troffers
- Office Lighting
- Warehouse Facilities
- Fluorescent Low Bay and High Bay
- Retail Lighting
- Healthcare Facilities
- School Lighting
- Industrial Shop Lighting




FEATURES & BENEFITS

- Significant Energy Saving 12.5W Retrofit Solution for F32T8 Lamps
- Single End or Double End Operation with Shunted or Non-Shunted Sockets* – Significantly Reduces Installation Expense
- Single End Operation Provides for Backward Compatibility Where Needed
- No Need for External Ballasts or Drivers
- Glass Tube – Better Transparency and Thermal Conductivity than Plastic. No Yellowing or Aging Like Plastic
- Conforms to NSF/ANSI 2 – Suitable for Use in Areas Where Food is Prepared
- Shatterproof, Coated Glass Lamp
- Frosted to Prevent Glare
- Instant On / No Flicker
- 50,000 Hour Rated Life – Long Life Reduces Maintenance Costs
- Application Friendly: UV Free and IR Free
- Environmentally Friendly: Mercury Free and Lead Free
- 5-Year Limited Warranty

* For single ended operation, use only non-shunted tombstones / lampholders that are in good condition.

SPECIFICATIONS

Beam Angle = 240°
Visible Light Area = 325°





G13 Base

Sold in Case Quantity Only

Bare Lamp Watts (W)	Ordering Code	Lamp Description	Voltage (V)	Color Temp (K)	Initial Lumens* (lm)	CRI	Rated** Life (h)	Case Qty
12.5	3000680	UBIQUITY 2 LED T8 DW SD, NW40, 48"	120-277	4000	1750	80+	50,000	25
12.5	3000681	UBIQUITY 2 LED T8 DW SD, DL50, 48"	120-277	5000	1800	80+	50,000	25

* Lumen data is based on system LM-79 tests.

** Rated life based on 70% lumen maintenance. LM-80 data available.

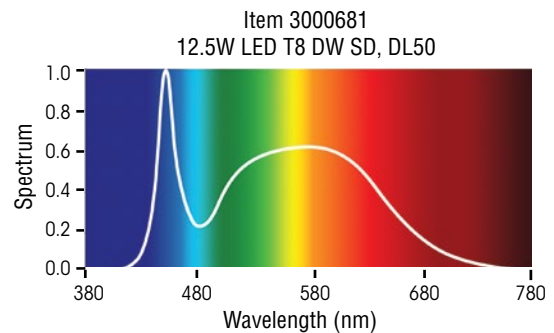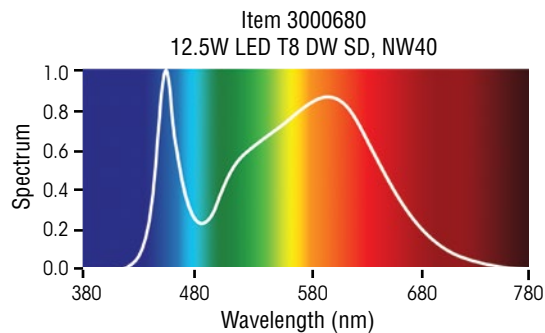

CAUTION:

This product can be wired to one end* or both ends**. See application notes below for general guidance. Please refer to the installation instructions included with the lamp, which is also available at www.ushio.com. Risk of electric shock: Use only in dry locations. Do not use with dimmers. Any modifications to the product will void the warranty. Lamps must be operated with an ambient fixture temperature of -30°C/-22°F to 56°C/133°F to ensure UL compliance. Lamp operating temperature must be a minimum of -20°C/-4°F to 45°C/113°F. These retrofit kits are intended for applications that use 4 foot F32T8 fluorescent lamps only. Risk of fire: Do not install this lamp in a Preheat Luminaire. Risk of electric shock: Disconnect power before installation. Use only in dry locations. Not intended for use with emergency exits or for emergency lighting. Risk of fire: If the lamp or luminaire exhibits undesirable operation (buzzing, flickering, etc.) immediately turn off power, remove lamp from luminaire and contact manufacturer.

***For single ended operation, use only non-shunted tombstones / lampholders that are in good condition. Do not install product in a fixture with shunted tombstones / lampholders (found in all fixtures using instant-start ballasts). If the current tombstones / lampholders are shunted, remove and replace them with non-shunted tombstones.**

****For double ended operation, use shunted or non-shunted tombstones / lampholders that are in good condition.**

USHIO

©2018 Ushio America, Inc. All rights reserved. Specifications may be subject to change without prior notice. Form No. S-UBIQ2LEDT8DW/0618
5440 Cerritos Avenue, Cypress, CA 90630 | Toll-free: (800) 838.7446 | customerservice@ushio.com | www.ushio.com