

USHIO Lampholders

USHIO



General Illumination
Stage, Studio and Television
Scientific / Medical
Heater

LAMPHOLDERS

STAY CONNECTED

Commonly referred to as sockets, Ushio America's lampholder line consists of products that are the key performance drivers of lighting systems. These lampholders offer peace of mind and reliability thanks to their safe connections to electrical power sources. Designed for optimum performance with their designated base types, the USHIO lampholder product line boasts a unique construction with exceptional thermal management properties.

From stage, studio and film environments, to store displays, this line covers a wide range of usage. No matter the application, USHIO products will secure your lamps and keep you connected. For any custom order inquiries, please contact your USHIO sales representative.

FEATURES & BENEFITS:

- Variety of Industry Applications
 - General Illumination
 - Stage, Studio and Television
 - Scientific/Medical
 - Heater
- Thermal Management Design
- Quality Materials
- Long Lasting Assemblies
- UL Recognized Lampholders in Product Line

C-14B

G4, GU4, GY4, GZ4 Bases Pg. 3

C-33U

GU5.3, GX5.3 Bases Pg. 3

S-221

GU5.3, GX5.3 Bases Pg. 4

C-21

GY5.3 Bases Pg. 5

J-11(A)

G6.35, GX6.35, GZ6.35 Bases Pg. 5

C-3

G9.5 Bases Pg. 6

J-10

G9.5 Bases Pg. 6

P28S

P28S Bases Pg. 7

C-8





R7s, RX7s Bases Pg. 7



C-14B (Item#1000109)



- Description: C-14B, G4/GU4/GY4/GZ4 LH
- Wattage (W): 300
- Voltage (V): 24
- Max. Operating Temp.: 350° C
- Body Material: Ceramic
- Wire Length (mm / in): 255 / 10.04
- Wire Specs: UL 1659, PTFE (Teflon), AWG 18, 250° C, 600V
- Lamp Types: Glass Miniature Bipin (JC), MR8, MR11
- Lamp Bases: G4, GU4, GY4, GZ4
- UL Recognized Component

• For custom lead wires, please contact your USHIO sales rep.



C-33U (Item#1002142)



- Description: C-33U, GU5.3/GX5.3 LH
- Wattage (W): 210
- Voltage (V): 30
- Max. Operating Temp.: 180° C
- Body Material: Steatite
- Wire Length (mm / in): 250 / 9.84
- Wire Specs: UL 3068, Silicone Rubber, AWG 18, 150° C, 300V
- Lamp Types: 2-Pin Base (Round Pins) - MR16
- Lamp Bases: GU5.3, GX5.3
- For custom lead wires, please contact your USHIO sales rep.

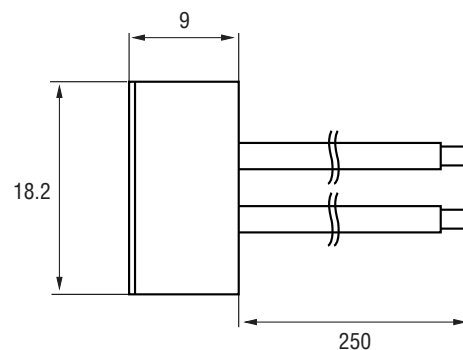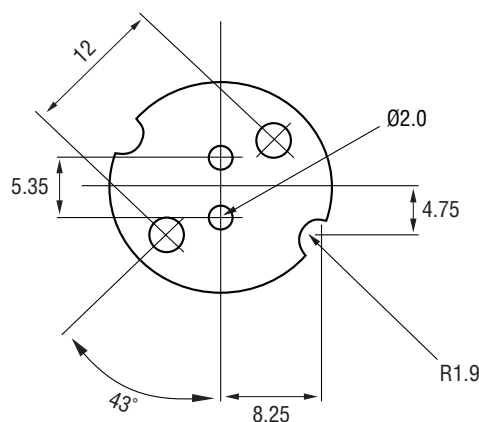


All dimensions are measured in millimeters unless otherwise noted.

S-221 (Item#1004025)


- Description: S-221, GU5.3/GX5.3 LH
- Wattage (W): 750
- Voltage (V): 300
- Max. Operating Temp.: 250° C
- Body Material: Steatite
- Wire Length (mm / in): 304.8 / 12
- Wire Specs: UL 3122, Silicone Rubber, AWG 18, 200° C, 300V
- Lamp Types: 2-Pin Base (Round Pins) - MR16
- Lamp Bases: GU5.3, GX5.3
- UL Recognized Component
- *For custom lead wires, please contact your USHIO sales rep.*

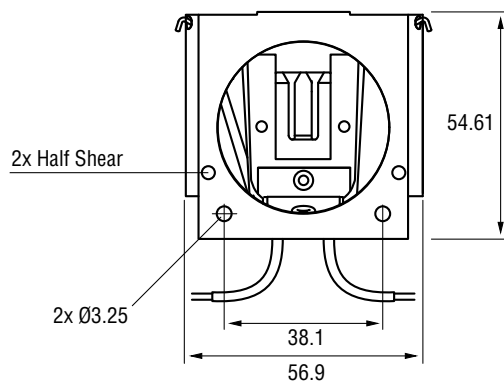

Front View

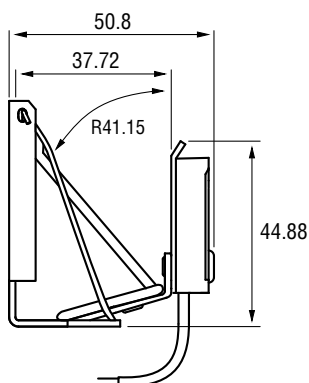

Side View

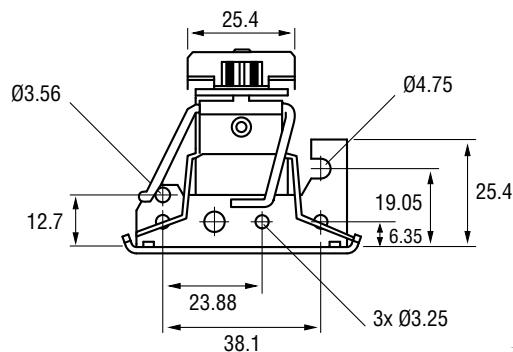

Back View







All dimensions are measured in millimeters unless otherwise noted.

Order and Inquiries • Toll-free: 1.800.838.7446 • Specifications subject to change without prior notice. Visit www.ushio.com for more info.

C-21 (Item#1000111)

- Description: C-21, GY5.3 LH
- Wattage (W): 750
- Voltage (V): 125
- Max. Operating Temp.: 180° C
- Body Material: Steatite
- Wire: *Please contact your USHIO sales rep. with your request*
- Lamp Types: 2-Pin Base (Flat Pins) - MR16
- Lamp Bases: GY5.3



* Special Order Item

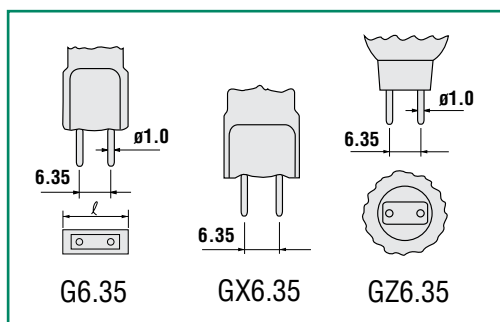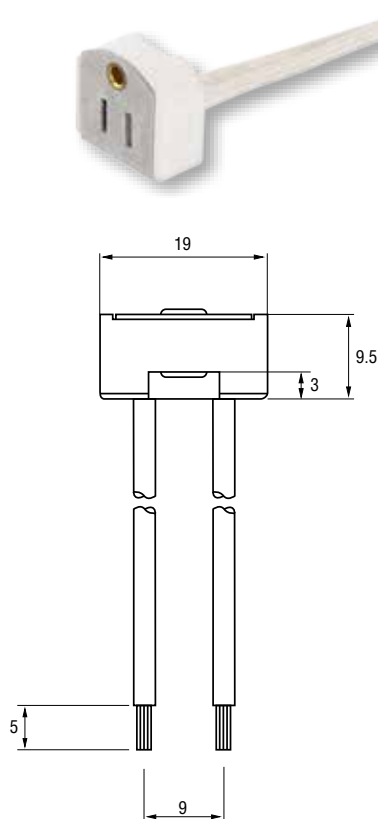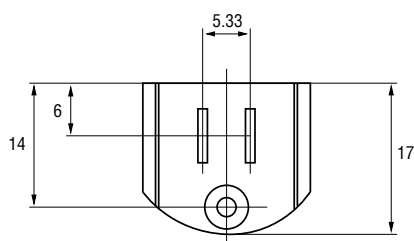

J-11 (A) (Item#1000681)

- Description: J-11(A), G6.35/GX6.35/GZ6.35 LH
- Wattage (W): 1500
- Voltage (V): 250
- Max. Operating Temp.: 250° C
- Body Material: Ceramic
- Wire: *Please contact your USHIO sales rep. with your request*
- Lamp Types: Glass Miniature Bipin (JC, JCR), 2-Pin Base (Round Pins) - MR16
- Lamp Bases: G6.35, GX6.35, GZ6.35


* Special Order Item

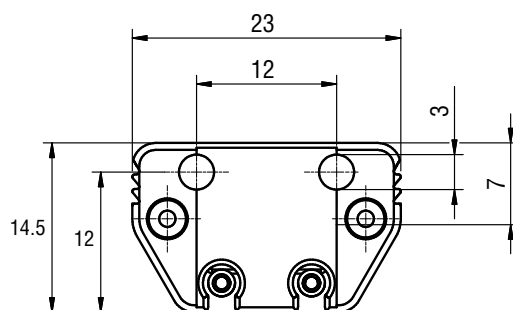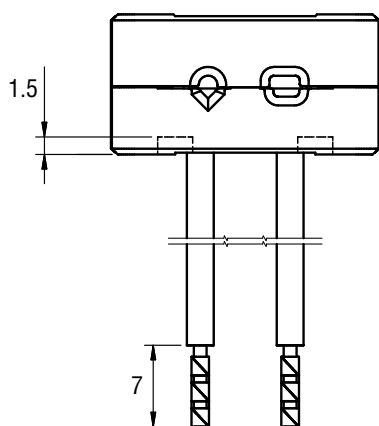





All dimensions are measured in millimeters unless otherwise noted.

C-3 (Item#1000113)

- Description: C-3, G9.5 LH
- Wattage (W): 1000
- Voltage (V): 250
- Max. Operating Temp.: 200° C
- Body Material: Steatite
- Wire Length (mm / in): 914.4 / 36
- Wire Specs: UL 1815, PTFE (Teflon), AWG 18, 250° C, 300V
- Lamp Types: Medium 2-Pin Base (JCD, JCV)
- Lamp Bases: G9.5
- *For custom lead wires, please contact your USHIO sales rep.*



USHIO

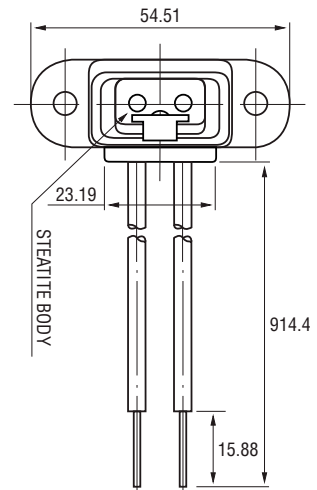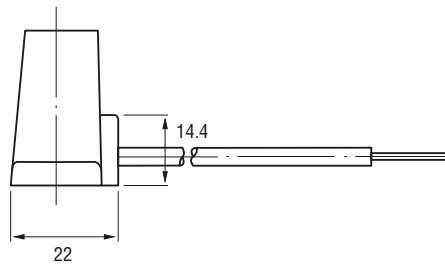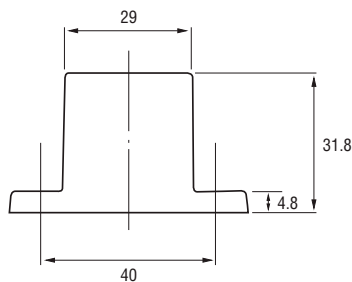




J-10 (Item#1000679)

- Description: J-10, G9.5 LH
- Wattage (W): 1250
- Voltage (V): 125
- Max. Operating Temp.: 180° C
- Body Material: Steatite
- Wire Length (mm / in): 304.8 / 12
- Wire Specs: UL 3068, Silicone Rubber, AWG 16, 150° C, 300V
- Lamp Types: Medium 2-Pin Base (JCD, JCV)
- Lamp Bases: G9.5
- *For custom lead wires, please contact your USHIO sales rep.*

J-10 Accessory: Item#1002225

3.17 Contacts for J-10, G9.5 LH




* Special Order Item

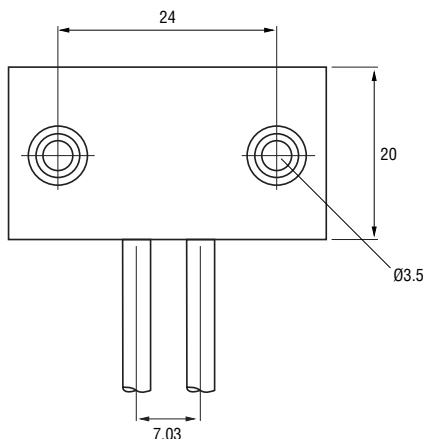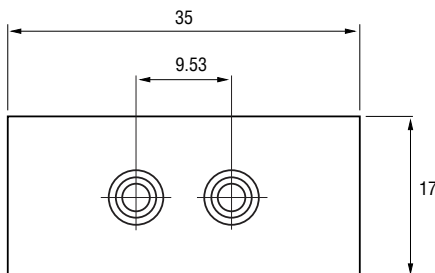

All dimensions are measured in millimeters unless otherwise noted.


P28S (Item#1001264)

- Description: P28S LH
- Wattage (W): 2500
- Voltage (V): 250
- Max. Operating Temp.: 250° C
- Body Material: Porcelain
- Lamp Types: Medium Prefocus (JCS, JS)
- Lamp Bases: P28S

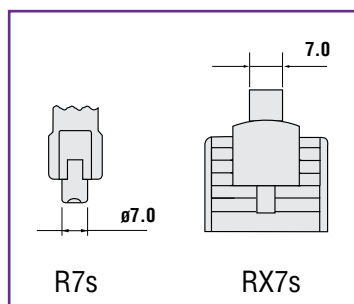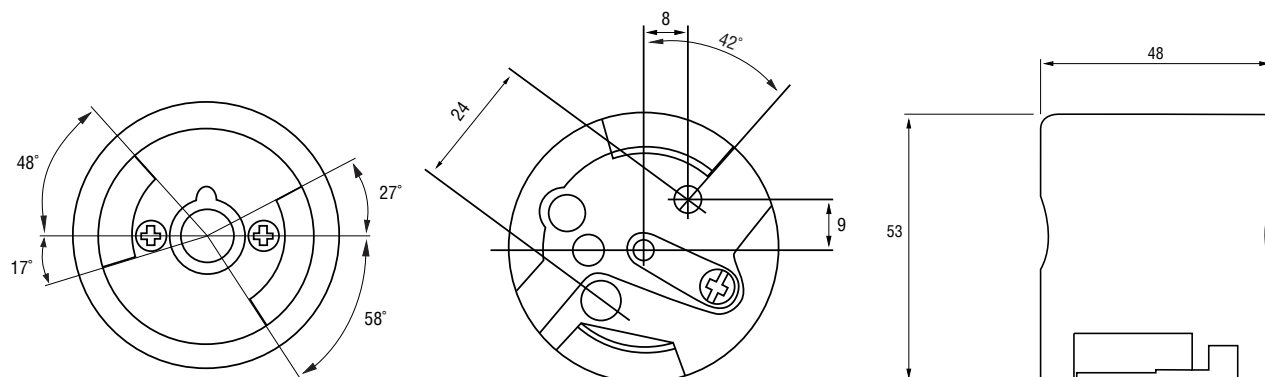

C-8 (Item#1000117)

- Description: C-8, R7s/RX7s LH
- Wattage (W): 2500
- Voltage (V): 250
- Max. Operating Temp.: 180° C
- Body Material: Steatite
- Wire Length (mm / in): 152.4 / 6
- Wire Specs: UL 3068, Silicone Rubber, AWG 16, 150° C, 300V
- Lamp Types: Recessed Single Contact (RSC), Double-Ended Halogen (J, JP, JPD, QIH, QIR)
- Lamp Bases: R7s, RX7s
- *For custom lead wires, please contact your USHIO sales rep.*

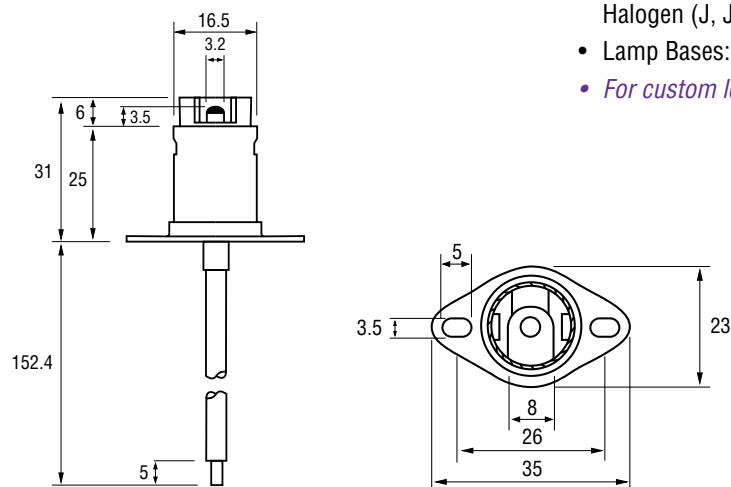

All dimensions are measured in millimeters unless otherwise noted.



USHIO AMERICA, INC.

5440 Cerritos Ave, Cypress, CA 90630
Tel: 800.838.7446 Fax: 800.776.3641

© 2015 Ushio America, Inc. All rights reserved.
All specifications are subject to change without notice.

C-Lampholder0416R