



#### Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

### Features & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Horizontal burn position
- · Easy installation
- Reduced maintenance costs
- \*Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 5.9" diameter by 12.6" long.

## Applications

- Area Lighting
- · Flood lighting

#### Notes

- The use of an external surge protection device is recommended. Operating temperature range between -4°F and 113°F (-20°C and 45°C). Suitable for use in dry and damp environments.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamp base rotates up to 270° to allow for proper aiming of the lamp.

| Product Performance                |                               |
|------------------------------------|-------------------------------|
| Input Power (W)                    | 115                           |
| Bare Lamp Lumens                   | 13500                         |
| DLC Rated Lumens                   | 10640                         |
| Lumens/Watt (Bare Lamp)            | 117                           |
| Orientation                        | Horizontal                    |
| Correlated Color Temperature (CCT) | 4000K                         |
| Color Rendering Index (CRI)        | 70                            |
| Life Hours                         | 50000                         |
| Distribution                       | Type V                        |
| Dimming                            | No                            |
| Operating Temperature Range        | -4°F to 113°F (-20°C to 45°C) |

| Physical Characteristics |                 |
|--------------------------|-----------------|
| Base Type                | Mogul, (E39)    |
| Overall Length A         | 11.69" (297mm)  |
| Diameter B               | 5.43" (138mm)   |
| Weight                   | 2.8 lbs (1280g) |

| Electrical Characteristics |                      |
|----------------------------|----------------------|
| Input Voltage Range        | 120V-277V; 50/60Hz   |
| Driver                     | Internal within lamp |
| Power Factor               | >0.90                |
| THD                        | <20%                 |


| Regulatory Qualifications       |
|---------------------------------|
| cULus Listed                    |
| cULus Classified (per UL 1598C) |


# Accessories SP12714 – 120-277V Surge Protector






# Venture 115W LED Retrofit Lamp w/ Type V Distribution

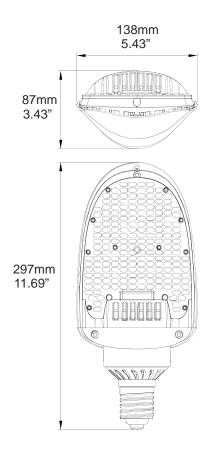



Note: data shown is for the bare lamp only



Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606 Fax: (800) 451-2605 7905 Cochran Rd, Suite 300 Glenwillow, Ohio 44139 E-mail: Venture\_Lighting@VentureLighting.com VentureLighting.com

