



## Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

## Features & Benefits

- Replaces MH or HPS up to 50W\*
- Replaces CFL up to 32W\*
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs
- *\*Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 6" diameter by 8.5" long.*

## Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- Garage lighting
- General illumination

## Notes

- The use of an external surge protection device is recommended.
- Operating temp. range between -40°F and 122°F (-40°C and 50°C).
- Suitable for use in dry and damp environments.
- Suitable for use in portable, surface mounted and ceiling luminaires.
- Suitable for use in open and enclosed luminaires with minimum lamp compartment dimensions of 6 inch diameter x 8.5 inch deep.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamps have clear polycarbonate cover lenses

Model# OR010B26D-4000K

## Product Performance

|                                    |                                |
|------------------------------------|--------------------------------|
| Input Power (W)                    | 10                             |
| Initial Lumens                     | 1400                           |
| Lumens/Watt                        | 140                            |
| Correlated Color Temperature (CCT) | 4000K                          |
| Color Rendering Index (CRI)        | 80                             |
| Life Hours                         | 50000                          |
| Minimum Lamp Compartment Size      | 6" x 6" x 8.5"                 |
| Dimming                            | No                             |
| Operating Temperature Range        | -40°F to 122°F (-40°C to 50°C) |

## Physical Characteristics

|                  |               |
|------------------|---------------|
| Base Type        | Medium, (E26) |
| Overall Length A | 5.63" (143mm) |
| Diameter B       | 2.32" (59mm)  |

## Electrical Characteristics

|                     |                      |
|---------------------|----------------------|
| Input Voltage Range | 100V-277V; 50/60Hz   |
| Driver              | Internal within lamp |
| Power Factor        | >0.90                |
| THD                 | <20%                 |

## Regulatory Qualifications


cULus Listed

## Accessories

SP12714 – 120-277V Surge Protector



# Venture 10W LED Retrofit Lamp

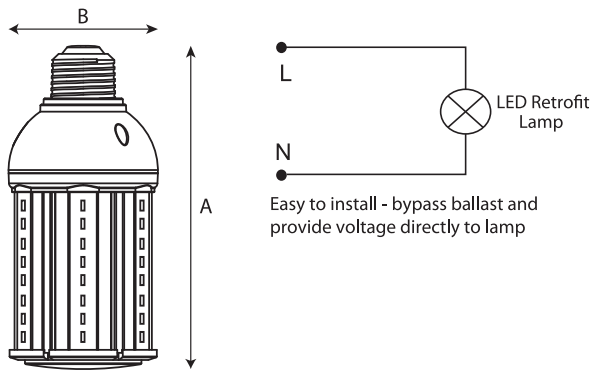

(800) 451-2606  
Fax: (800) 451-2605  
7905 Cochran Rd, Suite 300  
Glenwillow, Ohio 44139  
E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)  
[VentureLighting.com](http://VentureLighting.com)

