


Data sheet | Item number: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

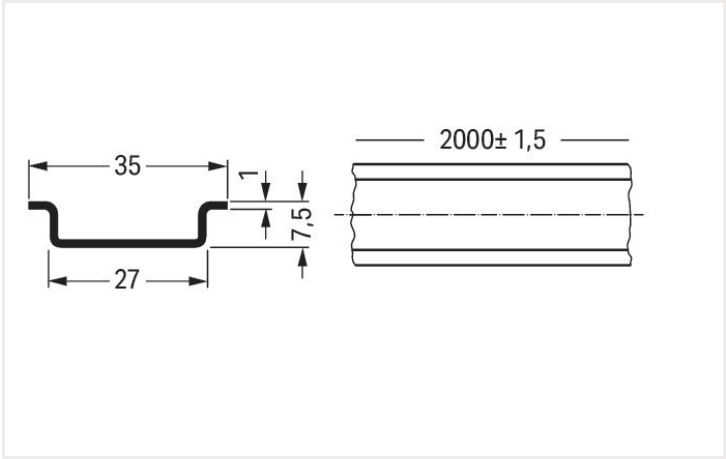

Dimensions in mm

Technical data		
Main product function	Mounting accessories	

Physical data		
Width	2000 mm / 78.74 inches	
Height	7.5 mm / 0.295 inches	
Depth	35 mm / 1.378 inches	

Material data		
Color	silver-colored	
Fire load	0 MJ	
Weight	690 g	

Commercial data		
Product Group	2 (Terminal Block Accessories)	
eCl@ss 10.0	27-40-06-02	
eCl@ss 9.0	27-40-06-02	
ETIM 8.0	EC001285	
ETIM 7.0	EC001285	
PU (SPU)	10 (1) Stück	
Packaging type	Box	
Country of origin VKOrg Germany	IT	
GTIN	4017332272308	
Customs tariff number VKOrg Germany	72169180000	



Installation notes

DIN-Rail	Item No.	Current [A]	Acc. to mm ² /AWG Cu
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0
Current applies to rails of 1 m/3'3" length			

When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above. Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).