

| : 216-241


Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white

<https://www.wago.com/216-241>



: white

Similar to illustration

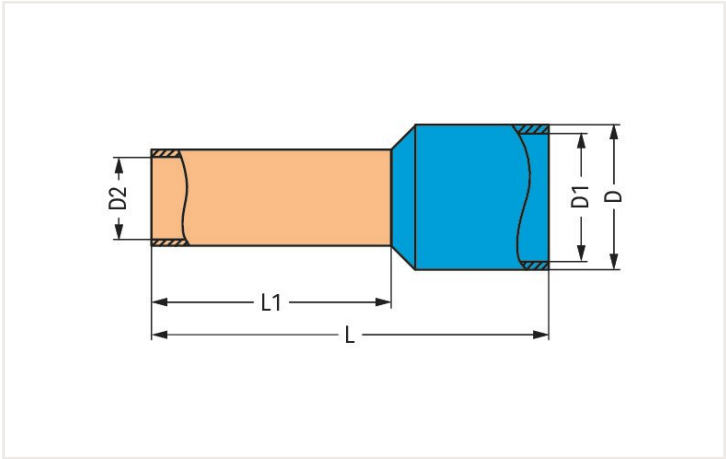

Dimensions in mm

Technical data	
Main product function	Ferrule
Sleeve cross-section (AWG)	20 AWG
Sleeve for	0.5 mm²

Connection data	
Strip length	12 mm / 0.47 inches


Physical data	
Length	16 mm
Length 1	10 mm
Diameter	3.1 mm
Diameter 1	2.6 mm
Diameter 2	1 mm

Mechanical data	
Suitable	2001 – 2002 Series

Material data	
Color	white
Fire load	0.001 MJ
Weight	0.1 g

Commercial data

Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 8.0	EC000005
ETIM 7.0	EC000005
PU (SPU)	1000 Stück
Packaging type	Box
Country of origin VKOrg Germany	DE
GTIN	4044918016315
Customs tariff number VKOrg Germany	85369010000

Installation notes

A perfect gas-tight crimp – both electrical-ly and mechanically reliable