

| : 216-267


Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

<https://www.wago.com/216-267>



: ■ gray

Similar to illustration

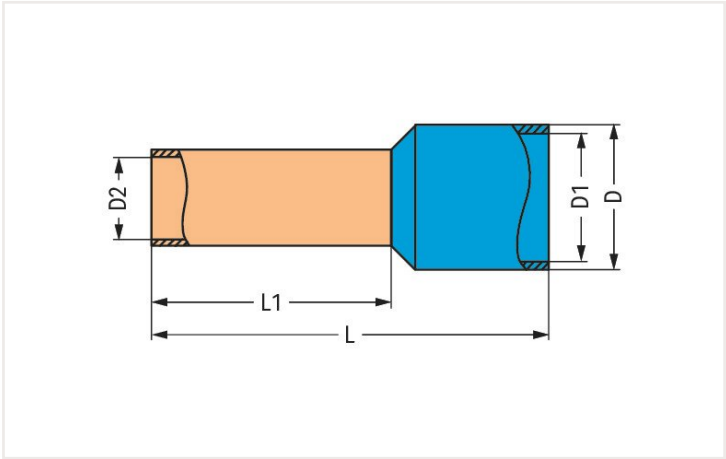

Dimensions in mm

Technical data	
Main product function	Ferrule
Sleeve cross-section (AWG)	12 AWG
Sleeve for	4 mm²

Connection data	
Strip length	14 mm / 0.55 inches


Physical data	
Length	20 mm
Length 1	12 mm
Diameter	5.4 mm
Diameter 1	4.8 mm
Diameter 2	2.8 mm

Mechanical data	
Suitable	2004 to 2006 Series

Material data	
Color	gray
Fire load	0.001 MJ
Weight	0.2 g

Commercial data

Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 8.0	EC000005
ETIM 7.0	EC000005
PU (SPU)	500 (100) Pieces
Packaging type	Box
Country of origin VKOrg Germany	DE
GTIN	4055143654739
Customs tariff number VKOrg Germany	85369010000

Installation notes

A perfect gas-tight crimp – both electrical-ly and mechanically reliable