


I : 222-500

Mounting carrier; 222 Series; for DIN-35 rail mounting/screw mounting; orange

<https://www.wago.com/222-500>

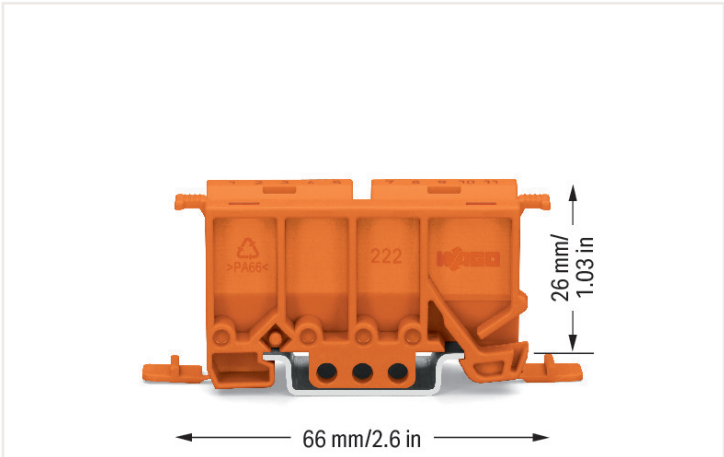

: orange



Physical data	
Width	22 mm / 0.866 inches
Height	66 mm / 2.598 inches
Depth from upper-edge of DIN-rail	26 mm / 1.024 inches

Mechanical data	
Mounting type	DIN-35 rail Screw mount
Suitable	for 2-, 3- and 5-conductor splicing connectors (222 Series)

Material data	
Note (material data)	Information on material data can be found here
Color	orange
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.326 MJ
Weight	10.9 g


Commercial data

Product Group	7 (Push Wire Conn.)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (10) Stück
Packaging type	Box
Country of origin VKOrg Germany	CN
GTIN	4045454714765
Customs tariff number VKOrg Germany	39269097900


Installation notes



Snapping the lateral connector safety lock onto the mounting carrier.




Securing a strain relief plate (222-505) to the mounting carrier.




Snapping the angled DIN-rail adapter (222-510) onto the mounting carrier.




Horizontal mounting on DIN-35 rail using an angled DIN-rail adapter



Horizontal mounting with strain relief plate on DIN-35 rail using an angled DIN-rail adapter




Horizontal screw mounting with strain relief plate on a flat surface



Vertical mounting with strain relief plate on DIN-35 rail;
Marking clamping units via marking strips.



Strain relief via cable ties on the mounting carrier (transverse to the connectors' wiring direction);
Molded marking clamping units



Mounting carrier with strain relief plate mounted vertically on a plate.
Round cable secured via strain relief lug.