



| : 2773-406

COMPACT splicing connector; for solid and stranded conductors; max. 4 mm²; 6-conductor; transparent housing; Gray cover; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent
<https://www.wago.com/2773-406>

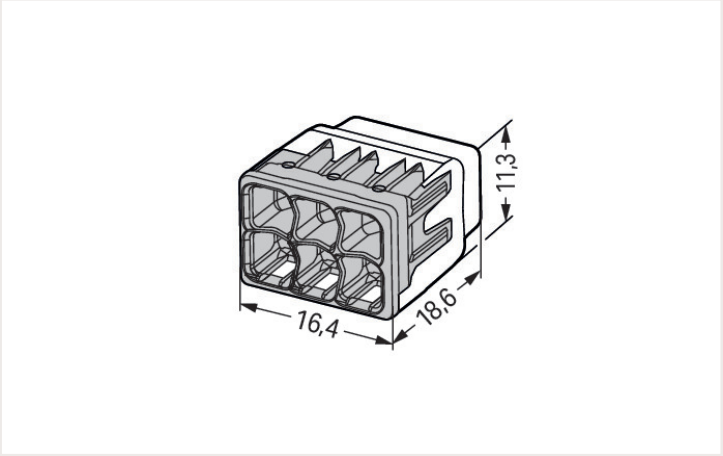

: ☐ transparent

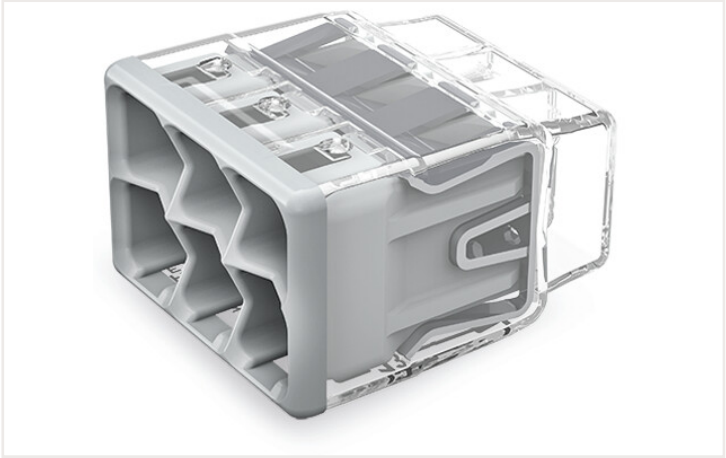

Dimensions in mm

Advantages:

- Convenient wiring via extremely compact design
- Push-in termination of up to eight solid and stranded conductors
- Conductor range: 0.75 ... 4 mm² "s" and 1.5 ... 4 mm² "st"
- Any combination of conductor sizes is possible
- PUSH WIRE® connection terminates solid ("s+str") copper conductors

Electrical data			
Ratings per IEC/EN		Ratings per UL	
Ratings per	IEC/EN 60998	Approvals per	UL 486C
Nominal voltage (II/2)	450 V	Rated voltage (UL)	600 V
Rated surge voltage (II/2)	4 kV	Rated current UL	20 A
Rated current	32 A		
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2		

Connection data																		
Total number of connection points	6	Connection 1 <table><tr><td>Connection technology</td><td>PUSH WIRE®</td></tr><tr><td>Actuation type</td><td>Push-in</td></tr><tr><td>Connectable conductor materials</td><td>Copper</td></tr><tr><td>Solid conductor</td><td>0.75 ... 4 mm² / 20 ... 12 AWG</td></tr><tr><td>Stranded conductor</td><td>1.5 ... 4 mm² / 18 ... 12 AWG</td></tr><tr><td>Conductor diameter</td><td>1.6 ... 2 mm / 20 ... 12 AWG</td></tr><tr><td>Strip length</td><td>13 mm / 0.51 inches</td></tr><tr><td>Wiring direction</td><td>Side-entry wiring</td></tr></table>	Connection technology	PUSH WIRE®	Actuation type	Push-in	Connectable conductor materials	Copper	Solid conductor	0.75 ... 4 mm² / 20 ... 12 AWG	Stranded conductor	1.5 ... 4 mm² / 18 ... 12 AWG	Conductor diameter	1.6 ... 2 mm / 20 ... 12 AWG	Strip length	13 mm / 0.51 inches	Wiring direction	Side-entry wiring
Connection technology	PUSH WIRE®																	
Actuation type	Push-in																	
Connectable conductor materials	Copper																	
Solid conductor	0.75 ... 4 mm² / 20 ... 12 AWG																	
Stranded conductor	1.5 ... 4 mm² / 18 ... 12 AWG																	
Conductor diameter	1.6 ... 2 mm / 20 ... 12 AWG																	
Strip length	13 mm / 0.51 inches																	
Wiring direction	Side-entry wiring																	
Total number of potentials	1																	

Physical data		
Width	16.4 mm / 0.646 inches	
Height	11.3 mm / 0.445 inches	
Depth	18.6 mm / 0.732 inches	

Material data	
Note (material data)	Information on material data can be found here
Color	transparent
Cover color	gray
Material group	IIIa
Flammability class per UL94	V2
Fire load	0 MJ
Weight	2.6 g

Environmental requirements	
Ambient temperature (operation)	+85 °C
Continuous operating temperature	-40 ... +105 °C
Temperature marking per EN 60998	T85

Commercial data	
ETIM 8.0	EC000446
ETIM 7.0	EC000446
PU (SPU)	500 (50) Stück
Packaging type	Box
Country of origin VKOrg Germany	DE
GTIN	4055143927666
Customs tariff number VKOrg Germany	85369010000

Approvals and certificates	
Country specific Approvals	



CB DEKRA Certification B.V.	IEC 60998	NL-49187
KEMA/KEUR DEKRA Certification B.V.	EN 60669	71-101844



UL-Approvals



UL_Listed_667F Underwriters Laboratories Inc.	UL 486C	E69654
UL Underwriters Laboratories Inc.	UL 467	20180215-E201573

Installation notes

Conductor termination



Strip solid or stranded conductor to 13 mm (0.51 inch).

The transparent housing shows if conductors are fully inserted; within the colored base, a clear port shows if the conductor's strip length is correct. Conductors are correctly stripped if the clear port shows no bare conductor on the unprinted connector side. Picture shows center conductor with exceeded strip length.

Termination: Insert the stripped conductor until it hits the backstop.

Removal: Hold solid conductor to be removed and twist alternately left and right while pulling the connector.




Testing



Testing via test port opposite to conductor entry.

Application



Thanks to their flat and compact design, these connectors are ideal for wiring in flush-mount switch boxes.



With six variants, always have the right connector.

Änderungen vorbehalten. Bitte beachten Sie auch die weitere Produktdokumentation!

Adressen finden Sie unter: www.wago.com