



| : 773-331

Mounting carrier; for Ex applications; 773 Series - 2.5 mm² / 6 mm²; for DIN-35 rail mounting/screw mounting; light gray

<https://www.wago.com/773-331>

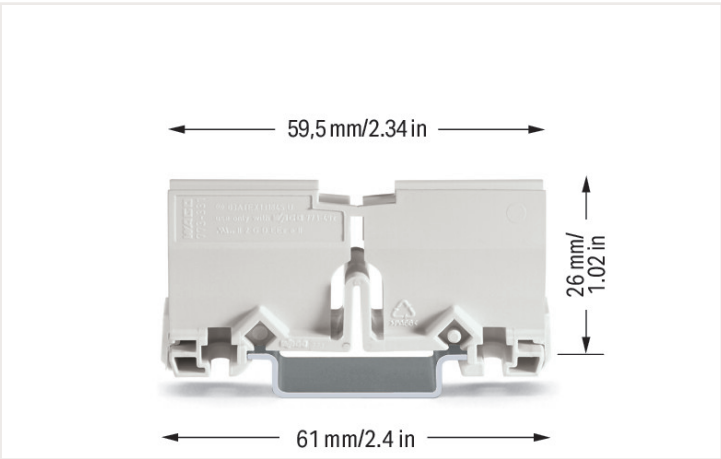

: light gray

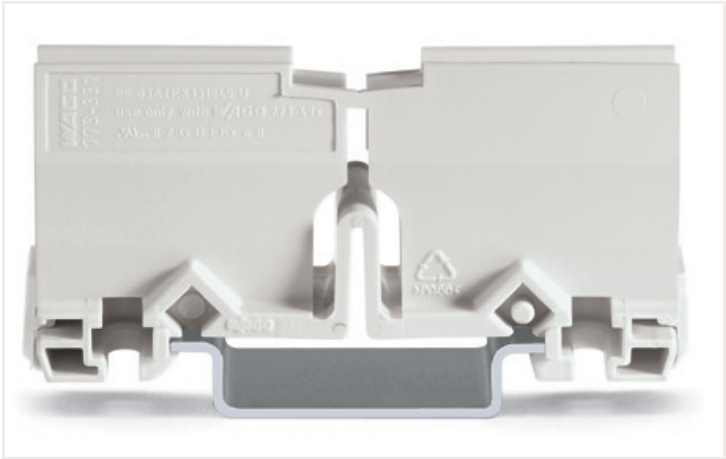

Physical data	
Width	18 mm / 0.709 inches
Height	61 mm / 2.402 inches
Depth from upper-edge of DIN-rail	26 mm / 1.024 inches

Mechanical data	
Mounting type	DIN-35 rail Screw mount
Suitable	for all Ex PUSH WIRE® junction box connectors (773 Series)

Material data	
Note (material data)	Information on material data can be found here
Color	light gray
Fire load	0.262 MJ
Weight	8.7 g

Commercial data	
Product Group	7 (Push Wire Conn.)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (10) Stück
Packaging type	Box
Country of origin VKOrg Germany	DE
GTIN	4044918526517
Customs tariff number VKOrg Germany	39269097900

Approvals and certificates

Ex-Approvals



ATEX
UL International Demko A/
S

EN 60079


DEMKO 03 ATEX 131845U
(II 2 G Ex eII C Gb)

Installation notes

Installation




Snap the mounting carrier onto the DIN-rail.



Use the cover as an end plate.




Remove the mounting carrier from the DIN-rail.



Insert the connectors into the carrier.

Application



Wiring example in an Ex junction box



Wiring example in an Ex junction box