

| : 862-9525


4-conductor chassis-mount terminal strip; with ground contact; PE-N-L1-L2-L3; 5-pole; 4 mm²; 4,00 mm²; black

<https://www.wago.com/862-9525>




: ■ black

Similar to illustration

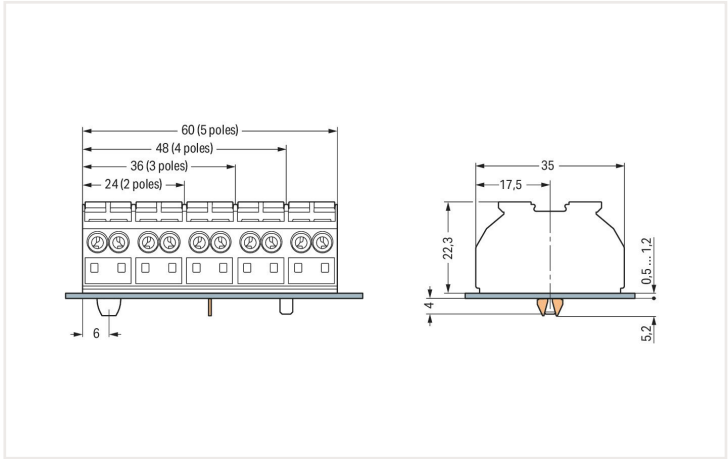

Dimensions in mm

Dimensions in mm
for chassis-mount terminal strips

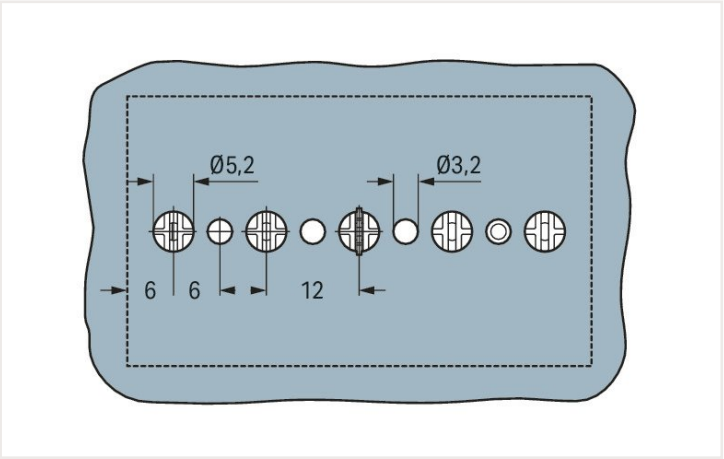

Dimensions in mm
for GND contact and snap-in mounting foot (Ø 5.2 mm)

Electrical data

Ratings per IEC/EN	
Nominal voltage (III/3)	500 V
Rated impulse voltage (III/3)	6 kV
Rated current	32 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Connection data

Total number of connection points	20	Connection 1	
Total number of potentials	5	Connection technology	Push-in CAGE CLAMP®
PE function	with ground contact	Actuation type	Push-button
		Connectable conductor materials	Copper
		Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG
		Solid conductor; push-in termination	0.75 ... 4 mm² / 18 ... 12 AWG
		Stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG
		Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 20 ... 16 AWG
		Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 18 AWG
		Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.
		Strip length	10 ... 11 mm / 0.39 ... 0.43 inches
		Pole number	5
		Wiring direction	Side-entry wiring

Physical data

Pin spacing	12 mm / 0.472 inches
Width	60 mm / 2.362 inches
Height from the surface	22.3 mm / 0.878 inches
Depth	35 mm / 1.378 inches

Mechanical data

Marking	Ⓢ-N-L1-L2-L3
Mounting type	Snap-in foot at pos. 2+4

Material data


Note (material data)	Information on material data can be found here
Color	black
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.643 MJ
Halogen-free	Yes
Weight	35.3 g

Commercial data		
Product Group	9 (Std. Chassis Mt. Blocks)	
eCl@ss 10.0	27-14-11-06	
eCl@ss 9.0	27-14-11-06	
ETIM 8.0	EC001284	
ETIM 7.0	EC001284	
PU (SPU)	200 Stück	
Packaging type	Bag	
Country of origin VKOrg Germany	DE	
GTIN	4044918510943	
Customs tariff number VKOrg Germany	85369010000	

Approvals and certificates					
Country specific Approvals			Ship Approvals		
					
CCA DEKRA Certification B.V.	EN 60947	NTR NL 6912	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001V2
CCA DEKRA Certification B.V.	EN 60947	2146425.01	LR Lloyds Register	EN 60947	91/20112 (E9)
CSA DEKRA Certification B.V.	C22.2 No. 158	1505030			
ENEC 15 UL International Germany GmbH	EN 60998	143856-01			

UL-Approvals		
		
UL UL International Germany GmbH	UL 1059	E45172


Installation notes



Cost-effective features:

WAGO's 862 Series Chassis-Mount Terminal Strips were developed specifically to minimize wiring costs, while accommodating requirements for flexible mounting, multiple connection points and easy usage. Equipped with Push-in CAGE CLAMP®, the 862 Series connects up to four conductors sized 0.5 to 4 mm² (20 ... 12 AWG). Due to multiple connection points per pole, different conductor sizes can be used within the same terminal block position. For factory wiring, Push-in CAGE CLAMP® Connection Technology allows solid conductors, fine-stranded conductors with ferrules or ultrasonically bonded conductors from 0.5 ... 4 mm² (20 ... 12 AWG) to be terminated by simply pushing them into unit (length of bonded conductor end: min. 10 mm). Convenient automatic grounding contact (optional) Snap-in mounting feet for fast assembly Push-buttons for easy installation with an operating tool or by hand Built-in test points simplify testing with 2 mm Ø test plug Standard marking for each pole, or custom marking for large orders

Conductor termination



Terminating four conductors per pole – solid and fine-stranded.




Inserting a conductor via push-button.

Commoning




Commoning using a comb-style jumper bar (862-482).

Testing




Testing with a 2 mm Ø test plug (max. 42 V).



Dimensions in mm

Marking



Marking by direct, one-side printing and marking strips