
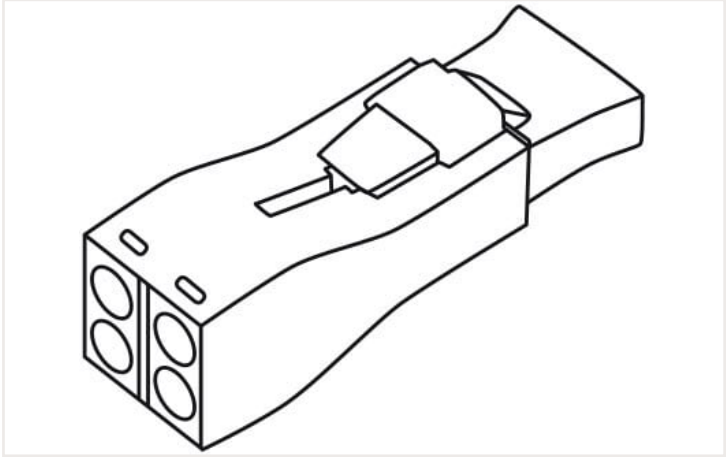


| : 873-902

Luminaire disconnect connector; 2-pole; 4,00 mm²; yellow
<https://www.wago.com/873-902>

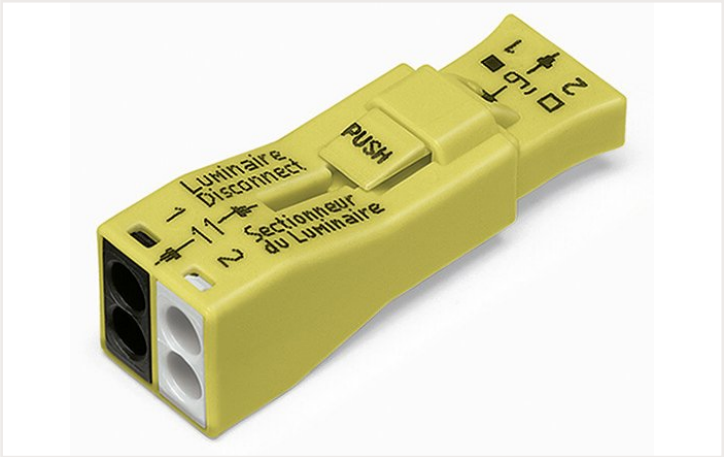

: yellow

Electrical data

Ratings per IEC/EN	
Ratings per	EN 60998
Nominal voltage (U/I/2)	400 V
Rated surge voltage (U/I/2)	4 kV
Rated current	6 A
Ratings per 2	EN 61984

Connection data

Total number of connection points	6
Total number of potentials	2

Connection 1	
Connection type 1	Plug
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper
Solid conductor	16 ... 12 AWG
Stranded conductor	16 ... 12 AWG
Strip length	11 ... 13 mm / 0.43 ... 0.51 inches
Pole number	2

Connection 2	
Connection type 2	Socket
Solid conductor 2	18 AWG
Strip length 2	9 ... 11 mm / 0.35 ... 0.43 inches

Physical data	
Width	13 mm / 0.512 inches
Height	13.2 mm / 0.52 inches
Depth	42 mm / 1.654 inches

Material data	
Note (material data)	Information on material data can be found here
Color	yellow
Fire load	0.103 MJ
Weight	4.8 g

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	500 (40) Pieces
Packaging type	Box
Country of origin VKOrg Germany	CN
GTIN	4066966245332
Customs tariff number VKOrg Germany	85366990990

Approvals and certificates

Country specific Approvals			UL-Approvals		
					
CCA DEKRA Certification B.V.	EN 61984	NTR NL-7390	UL UL International Germany GmbH	UL 2459	E313353
CCA DEKRA Certification B.V.	EN 61984	2178521.01			
CCA DEKRA Certification B.V.	EN 60998	71-114174			
CCA DEKRA Certification B.V.	EN 60998	NTR NL-7391			
CSA DEKRA Certification B.V.	C22.2 No. 182.3	154112 (LR 18677)			