


COMMERCIAL SERVICE

SPECIFICATION SHEET

150W LED UFO-Style High Bay Fixture

Item Number **65486**

- Black Finish
- Equivalent HID Wattage: 300W
- 5000K
- 22,500 Lumens
- 80 CRI
- 50,000 Hours
- Weight: 5.95lbs.
- Optional Accessories Available

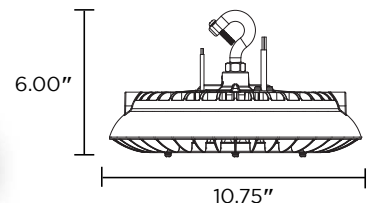

Features & Benefits

- Distinct UFO style fixture shape produces an optimal beam spread of 120 degrees, ensuring light is directed downwards in high bay applications.
- 150W fixtures produce crisp, high efficacy illumination (150LPW).
- IP65 rated - Approved for use in wet locations.
- 80 CRI.
- Great for industrial and commercial spaces, gymnasiums, warehouses and storage facilities.
- Operates at ambient temperature range of -40°F to 122°F (-40°C to 50°C).
- Voltage range of 120V-277V.
- Intelligent driver with built-in surge protection to withstand momentary surges up to 4000 volts that may occur in industrial installations.
- 0-10V dimming.
- Die cast magnesium alloy housing with durable powder coat finish.
- Includes heavy duty loop and hook, with additional mounting options available.
- Includes 13" input cord and 13" output cord for optional sensor controls.
- 5 year fixture warranty.

Optional hardware enhances versatility of High Bay UFO Fixtures.

- 70 degree polycarbonate reflector focuses light directly downward for optimal illumination.
- NPT thread adapters provide a pendant mounting option.
- Adjustable bracket allows the light output to be directed downward (standard orientation) or angled, directing light to one side or the other.
- Microwave motion sensor with 3-step dimming function illuminates at 100%, low light, and off.
- Detection area, hold time, stand-by period, stand-by dimming level and daylight sensor levels can be easily adjusted using the hand held remote control.



70 Degree Prismatic Reflector
for LED UFO-Style High Bay
Fixtures

Item No. 634856911

Height: 10.83" Diameter: 16.14"



*National Pipe Thread for 150W
LED UFO-Style High Bay
Fixture 65486

Item No. 6548X6912

Height: 2.36" Diameter: 1.37"



*Adjustable Bracket
for LED UFO-Style High Bay
Fixture 65486

Item No. 6548X6913

Height: 9.88" Width: 9.17"



*Motion Sensor
for LED UFO-Style High Bay
Fixture 65486

Item No. 6548X6914

Height: 2.32" Diameter: 2.84"



*Motion Sensor Remote Control
for LED UFO-Style High Bay
Fixture 65486

Item No. 6548X6939

Height: 7.08" Width: 2.36"

*SPECIAL ORDER ITEM
CALL YOUR WESTINGHOUSE LIGHTING REPRESENTATIVE FOR ADDITIONAL INFORMATION




COMMERCIAL SERVICE

SPECIFICATION SHEET

150W LED UFO-Style High Bay Fixture Photometrics WITHOUT REFLECTOR (120°)

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

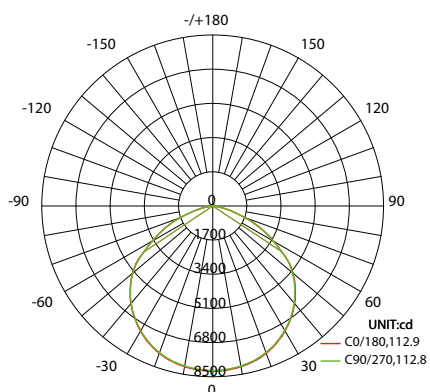


AVERAGE BEAM ANGLE(50%):112.9 DEG

Flux out: 18058 lm

Height	Beam Diameter	Beam Area (sq ft)	Beam Area (sq m)	Beam Area (sq yd)
3.281ft	9.849ft	77.16	7.14	8.81
6.562ft	19.7ft	308.64	28.56	35.41
9.843ft	29.55ft	688.24	63.61	78.91
13.12ft	39.4ft	1230.76	113.84	141.22
16.4ft	49.24ft	1912.16	176.44	217.22
19.69ft	59.09ft	2734.56	253.44	314.22
22.97ft	68.94ft	3707.96	342.44	423.22
26.25ft	78.79ft	4832.36	447.44	554.22
29.53ft	88.64ft	6107.76	564.44	697.22
32.81ft	98.49ft	7534.16	694.44	854.22

150W LED UFO-Style High Bay Fixture Photometrics WITH REFLECTOR (70°)

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

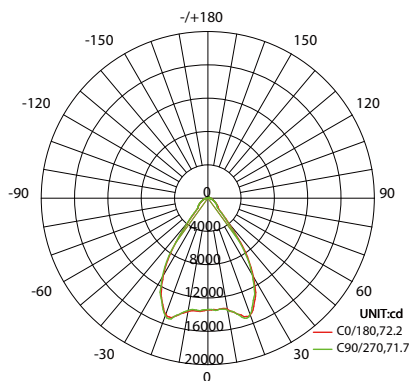

AVERAGE BEAM ANGLE(50%):71.9 DEG

Flux out: 14635 lm

Height	Beam Diameter	Beam Area (sq ft)	Beam Area (sq m)	Beam Area (sq yd)
3.281ft	4.737ft	22.41	2.08	2.58
6.562ft	9.474ft	89.64	8.32	10.32
9.843ft	14.211ft	160.24	14.88	18.41
13.12ft	18.95ft	258.76	23.94	29.41
16.4ft	23.68ft	375.16	34.74	42.91
19.69ft	28.42ft	500.56	46.44	57.41
22.97ft	33.16ft	634.96	58.44	72.41
26.25ft	37.89ft	778.36	71.84	88.41
29.53ft	42.63ft	929.76	85.84	105.41
32.81ft	47.37ft	1088.16	100.44	123.41